


Hold Down Clamp



Description

Metallic fixing for the clamping of Megaband® ladder to the support with M8 and M10 nuts and bolts. Suitable for all ladder sizes. Made of steel and available in various Protection Systems.

Advantages

For assembly you need only two pieces per support.

Improved fixing of the ladder to support increased loads.

Electrical continuity guaranteed according to standard IEC61537.

Connect with Megaband M8 joint kit or M8 and M10 nuts and bolts.

Available in various protection systems: PG, GC, BK8, AZ+ and stainless steel AISI 304 and AISI 316L.

Applications

Used for the fixing of Megaband® ladder to supports for cable management in electrical, telecommunications and industrial installations, infrastructures and civil works, tertiary sector.

Solutions



Main technical characteristics

 50	 -50 / 150 °C	 A1 No combustible	ETIM EC000482
--	--	---	------------------

Product data

Ⓢ	Class 61537	Ref	kg/u	Ⓜ
PG	Class 3	93910021	0.042	Steel with surface coating
GC	Class 8	93930021	0.044	Steel with surface coating
INOX	Class 9C	93950021	0.042	Stainless steel AISI 304
INOX	Class 9D	93960021	0.042	Acero inoxidable AISI 316L

Ⓢ Protection System

- CU - Copper electroplated
- PG - Pregalvanised
- EZ - Electrogalvanised
- BC - Electrogalvanised Bichromate
- BK8 - High Resistance Coating
- GC - Hot Dip Galvanising
- INOX - Stainless Steel
- PT - Polyester Paint
- AL - Aluminum
- LN - Brass or Nickel-plated brass


Ⓜ Insulating materials

- PC+ABS - Halogen Free Polycarbonate + ABS
- PVC - Polyvinyl Chloride
- PP - Halogen Free Polypropylene
- PA6 - Halogen Free Polyamide 6
- PA12 - Halogen Free Polyamide 12
- PU - Polyurethane
- PE - Polyethylene
- NBR - NBR rubber
- PET - Thermoplastic Polyester
- TPV - Thermoplastic




Hold Down Clamp

Product applications

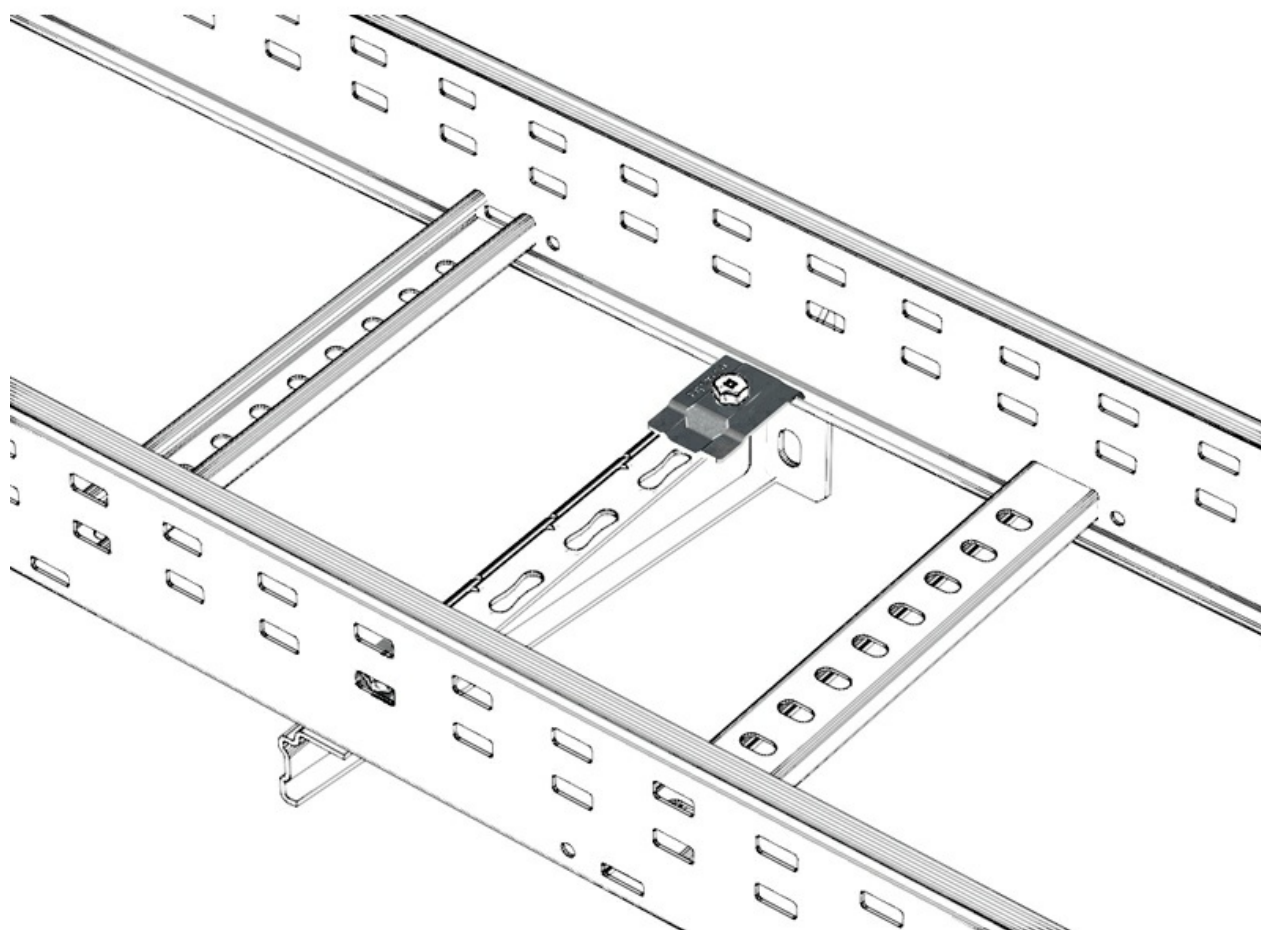

Hold Down Clamp

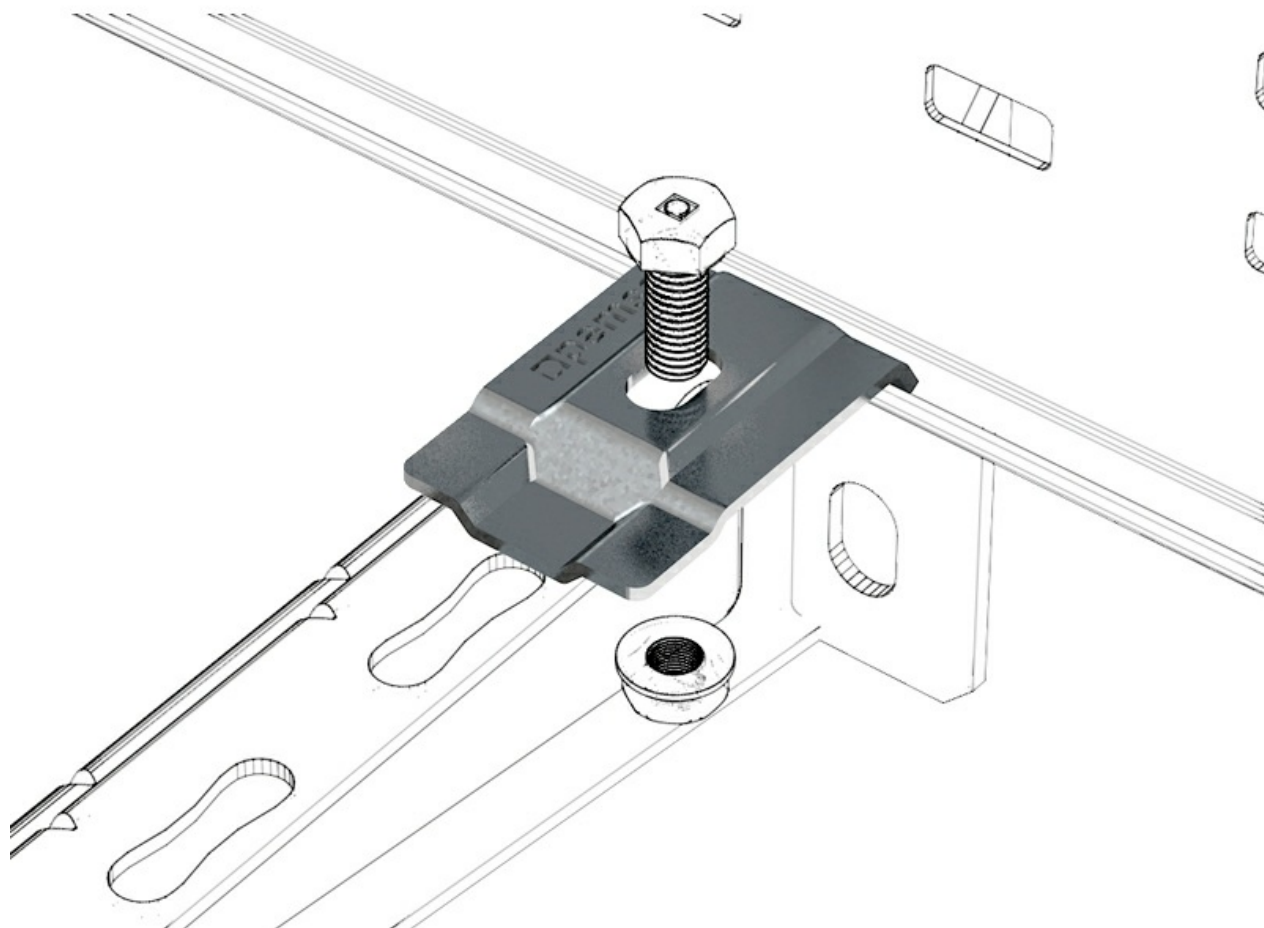

Hold Down Clamp

