


End Cover

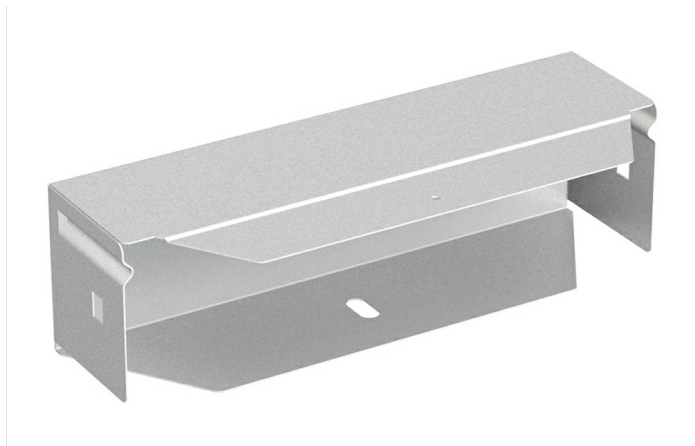

Description

Metal cover used as an end closure for the Megaband® ladder system. Quick connection assembly using the click system, without joints. Made of steel, in various sizes and Protection Systems.

Advantages

Its unique design allows the closure and protection of Megaband ladder.

Safer professional finish.

Available in various sizes.

Applications

It is used as a closure on the end of the Megaband® ladder system for the protection of the installation. Applicable in the management of cables in electrical and telecommunications installations in public buildings, infrastructures and civil works, industrial installations, tertiary sector.

Solutions



Main technical characteristics

 60, 100, 120	 100, 150, 200, 300, 400, 450, 500, 600, 750, 900	 1	 Steel with surface coating	 IP44
 -50 / 150 °C	 A1 No combustible	ETIM EC001573		

Product data

§	Class IEC 61537			Réf	kg/u
GC	Class 5	60	100	70039210	0.126
GC	Class 5	60	150	70039215	0.179
GC	Class 5	60	200	70039220	0.252
GC	Class 5	60	300	70039230	0.369
GC	Class 5	60	400	70039240	0.465
GC	Class 5	60	450	70039245	0.520
GC	Class 5	60	500	70039250	0.576
GC	Class 5	60	600	70039260	0.688
GC	Class 5	100	100	70039410	0.175
GC	Class 5	100	150	70039415	0.240
GC	Class 5	100	200	70039420	0.315
GC	Class 5	100	300	70039430	0.451
GC	Class 5	100	400	70039440	0.586
GC	Class 5	100	450	70039445	0.655
GC	Class 5	100	500	70039450	0.723
GC	Class 5	100	600	70039460	0.858
GC	Class 5	100	750	70039475	1.060
GC	Class 5	100	900	70039490	1.260
GC	Class 5	120	100	70039510	0.199
GC	Class 5	120	150	70039515	0.270
GC	Class 5	120	200	70039520	0.352
GC	Class 5	120	300	70039530	0.500
GC	Class 5	120	400	70039540	0.648
GC	Class 5	120	450	70039545	0.723
GC	Class 5	120	500	70039550	0.797
GC	Class 5	120	600	70039560	0.944
GC	Class 5	120	750	70039575	1.170
GC	Class 5	120	900	70039590	1.390
PG	Class 3	60	100	71022010	0.098
PG	Class 3	60	150	71022015	0.138
PG	Class 3	60	200	71022020	0.194
PG	Class 3	60	300	71022030	0.285
PG	Class 3	60	400	71022040	0.422
PG	Class 3	60	500	71022050	0.523
PG	Class 3	60	600	71022060	0.624

Ⓢ	Class	Ⓜ	Ⓜ	Ref	kg/u
PG	Class 3	100	100	71024010	0.156
PG	Class 3	100	150	71024015	0.215
PG	Class 3	100	200	71024020	0.282
PG	Class 3	100	300	71024030	0.403
PG	Class 3	100	400	71024040	0.525
PG	Class 3	100	450	71024045	0.586
PG	Class 3	100	500	71024050	0.647
PG	Class 3	100	600	71024060	0.768
PG	Class 3	120	100	71025010	0.178
PG	Class 3	120	150	71025015	0.242
PG	Class 3	120	200	71025020	0.315
PG	Class 3	120	300	71025030	0.447
PG	Class 3	120	400	71025040	0.580
PG	Class 3	120	450	71025045	0.647
PG	Class 3	120	500	71025050	0.713
PG	Class 3	120	600	71025060	0.845
AZ+	Class 8	60	100	82003806	0.098
AZ+	Class 8	60	150	82003807	0.138
AZ+	Class 8	60	200	82003808	0.194
AZ+	Class 8	60	300	82003809	0.285
AZ+	Class 8	60	400	82003810	0.482
AZ+	Class 8	60	500	82003811	0.597
AZ+	Class 8	60	600	82003812	0.713

Ⓢ Protection System

- CU - Copper electroplated
- PG - Pregalvanised
- EZ - Electrogalvanised
- BC - Electrogalvanised Bichromate
- BK8 - High Resistance Coating
- GC - Hot Dip Galvanising
- INOX - Stainless Steel
- PT - Polyester Paint
- AL - Aluminum
- LN - Brass or Nickel-plated brass

Ⓜ Insulating materials

- PC+ABS - Halogen Free Polycarbonate + ABS
- PVC - Polyvinyl Chloride
- PP - Halogen Free Polypropylene
- PA6 - Halogen Free Polyamide 6

End Cover

- PA12 - Halogen Free Polyamide 12
- PU - Polyurethane
- PE - Polyethylene
- NBR - NBR rubber
- PET - Thermoplastic Polyester
- TPV - Thermoplastic



End Cover

5/7

Product applications

