
Accessories PEMSABAND PO 24/04/2024









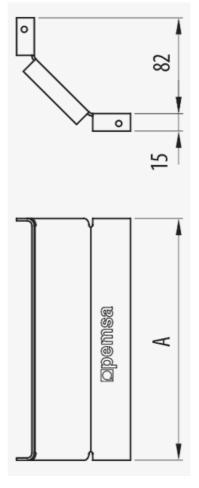

Description

Inside riser cover to protect the wiring installation of the Pemsaband® PQU and PQW tray. Mounting by screws. Approved according to CEPSA and REPSOL specifications. Made of steel, with GC Protection System 85 microns thick.

Advantages

Compatible with Pemsaband® PQU and Pemsaband® PQW ranges.

Available for widths from 100 to 400.

Conforms to IEC 61537 and CE Conformity to Directive 2014/35/EU.

Specially designed for the petrochemical sector, with CEPSA and REPSOL approvals.

GC protection system (standard UNE-EN ISO 1461), suitable for outdoor installations and in aggressive environments. Corrosion resistance class 8 according to IEC 61537.

Applications

Used for the protection of cables in the inside riser of Pemsaband® PQU and PQW trays, for the Support, management and distribution of cables in Petrochemical, Oil & Gas, Offshore, Civil works and Infrastructures, as well as in tunnels and installation galleries.

Solutions















Accessories PEMSABAND PO 24/04/2024

PQ Inside Riser Cover

2/2

Main technical characteristics

Class IEC Class 8 (S) GC

100, 150, 200, 300, 400

100

***** -50 / 150

°C

A1 No combustible

ETIM EC002402

Product data

	Ref	kg/u
100	70343010	0.289
150	70343015	0.405
200	70343020	0.520
300	70343030	0.752
400	70343040	0.982

S Protection System

CU - Copper electroplated

PG - Pregalvanised

EZ - Electrogalvanised

BC - Electrogalvanised Bichromate

BK8 - High Resistance Coating

GC - Hot Dip Galvanising

INOX - Stainless Steel

PT - Polyester Paint

AL - Aluminum

LN - Brass or Nickel-plated brass

® Insulating materials

PC+ABS - Halogen Free Polycarbonate + ABS

PVC - Polyvinyl Chloride

PP - Halogen Free Polypropylene

PA6 - Halogen Free Polyamide 6

PA12 - Halogen Free Polyamide 12

PU - Polyurethane

PE - Polyethylene

NBR - NBR rubber

PET - Thermoplastic Polyester

TPV - Thermoplastic











