


## PQ Equal Reducer

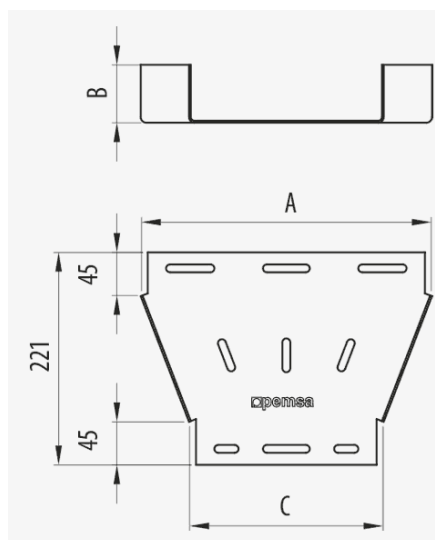

### Description

Metal accessory for the creation of an equal reducer for the installation of wiring with the Pemsaband® PQU and PQW trays with heights of 15, 30, 50 and 60 mm. With GC Protection System. It allows making changes of width of different sections with great ease using a single piece.

### Advantages

Compatible with Pemsaband® PQU and Pemsaband® PQW ranges.

Available for all heights 15, 30, 50 and 60. Please consult for the available widths and reduction sizes.

Conforms to IEC 61537 and CE Conformity to Directive 2014/35/EU.

Specially designed for the petrochemical sector, with CEPSA and REPSOL approvals.











GC protection system (standard UNE-EN ISO 1461), suitable for outdoor installations and in aggressive environments. Corrosion resistance class 8 according to IEC 61537.

### Applications


Suitable for the creation of width reductions in Pemsaband® PQU and PQW trays, for the Support, management and distribution of cables in Petrochemical, Oil & Gas, Offshore, Civil works and Infrastructures, as well as in tunnels and installation galleries.


### Solutions



Main technical characteristics							
 GC	 Class 8	 15, 30, 50, 60	 300, 400, 500, 600	 100	 1	 Steel with surface coating	 20 J
 -50 / 150 °C	 A1 No combustible	ETIM EC001007					

Product data				
			Ref	kg/u
15	300	200	70263030	0.929
30	300	200	70263130	1.001
30	400	300	70263140	1.361
30	500	400	70263150	1.721
30	600	500	70263160	2.081
50	300	200	70263230	1.101
50	400	300	70263240	1.451
50	500	400	70263250	1.811
50	600	500	70263260	2.271
60	300	200	70263330	1.141
60	400	300	70263340	1.501
60	500	400	70263350	1.861
60	600	500	70263360	2.231

 Protection System
<b>CU</b> - Copper electroplated
<b>PG</b> - Pregalvanised
<b>EZ</b> - Electrogalvanised
<b>BC</b> - Electrogalvanised Bichromate
<b>BK8</b> - High Resistance Coating
<b>GC</b> - Hot Dip Galvanising
<b>INOX</b> - Stainless Steel
<b>PT</b> - Polyester Paint
<b>AL</b> - Aluminum
<b>LN</b> - Brass or Nickel-plated brass

 Insulating materials
<b>PC+ABS</b> - Halogen Free Polycarbonate + ABS
<b>PVC</b> - Polyvinyl Chloride
<b>PP</b> - Halogen Free Polypropylene
<b>PA6</b> - Halogen Free Polyamide 6
<b>PA12</b> - Halogen Free Polyamide 12
<b>PU</b> - Polyurethane
<b>PE</b> - Polyethylene
<b>NBR</b> - NBR rubber

PQ Equal Reducer

PET - Thermoplastic Polyester

TPV - Thermoplastic



[www.pemsa-rejiband.com](http://www.pemsa-rejiband.com)



Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."