


## Side Support 60

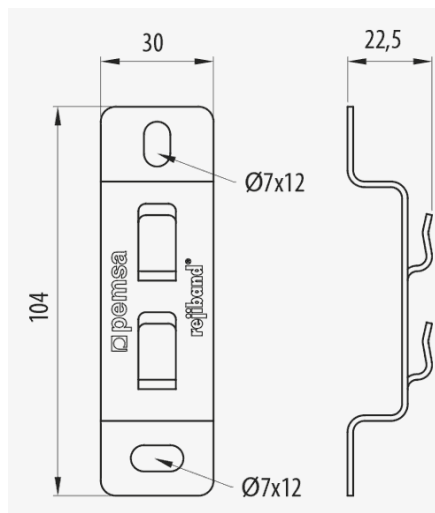

### Description

### Advantages

### Applications

### Solutions



INDUSTRIA ALIMENTARIA



[www.pemsa-rejiband.com](http://www.pemsa-rejiband.com)

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."



Main technical characteristics

 25	 25	 -50 / 150 °C	 A1 No combustible	ETIM EC000022
--	--	--	---	------------------

Product data

Ⓢ	Class 61537	Ref	kg/u	Ⓜ
EZ	Class 3	62011060	0.043	Steel with surface coating
BC	Class 5	62021060	0.043	Steel with surface coating
GC	Class 8	62031060	0.044	Steel with surface coating
INOX	Class 9D	62061060	0.042	Acero inoxidable AISI 316L
BK8	Class 8	62081060	0.043	Steel with surface coating
CU	Class 1	82003262	0.041	Steel with surface coating

Ⓢ Protection System


- CU** - Copper electroplated
- PG** - Pregalvanised
- EZ** - Electrogalvanised
- BC** - Electrogalvanised Bichromate
- BK8** - High Resistance Coating
- GC** - Hot Dip Galvanising
- INOX** - Stainless Steel
- PT** - Polyester Paint
- AL** - Aluminum
- LN** - Brass or Nickel-plated brass

Ⓜ Insulating materials


- PC+ABS** - Halogen Free Polycarbonate + ABS
- PVC** - Polyvinyl Chloride
- PP** - Halogen Free Polypropylene
- PA6** - Halogen Free Polyamide 6
- PA12** - Halogen Free Polyamide 12
- PU** - Polyurethane
- PE** - Polyethylene
- NBR** - NBR rubber
- PET** - Thermoplastic Polyester
- TPV** - Thermoplastic

## Side Support 60


### Product applications

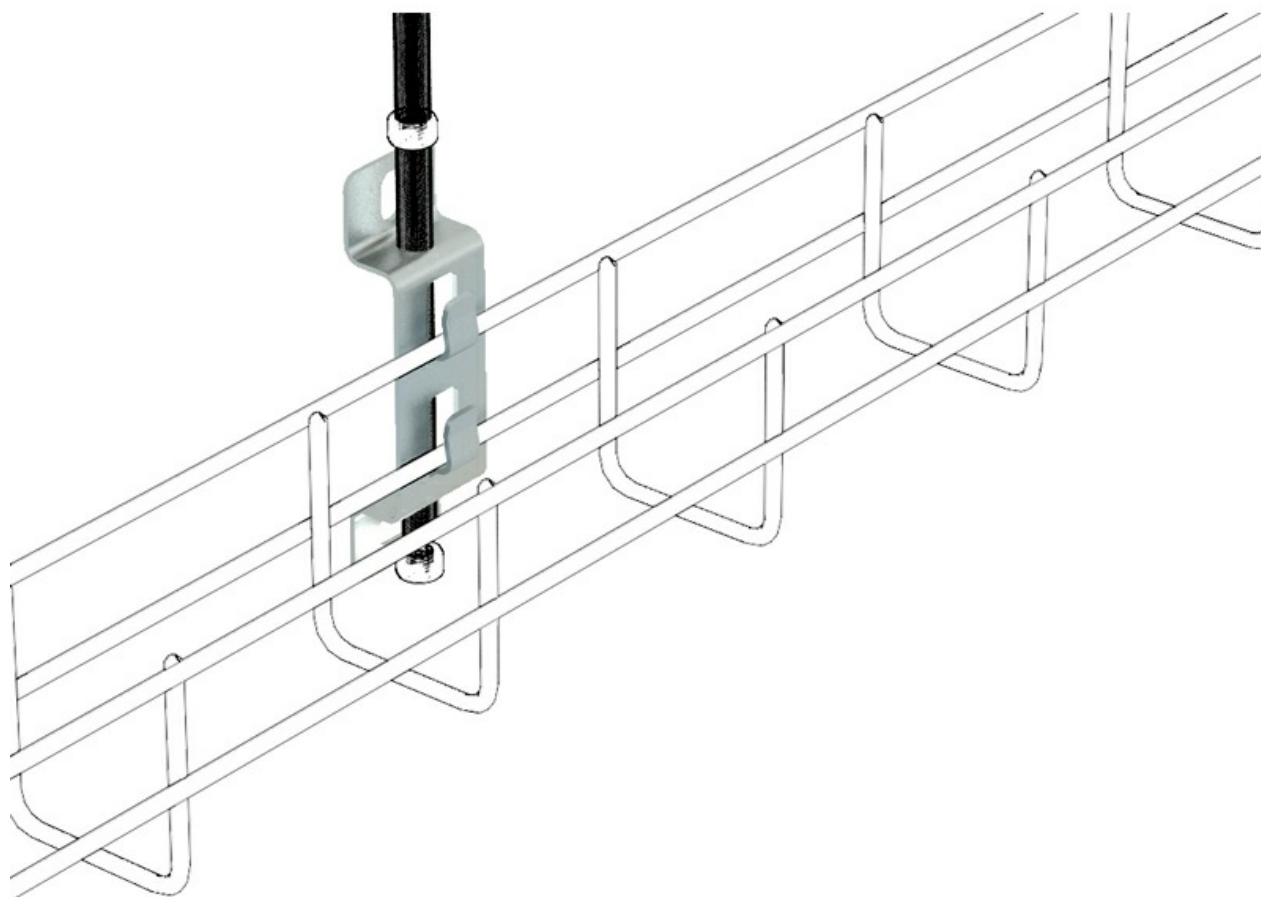

# Side Support 60

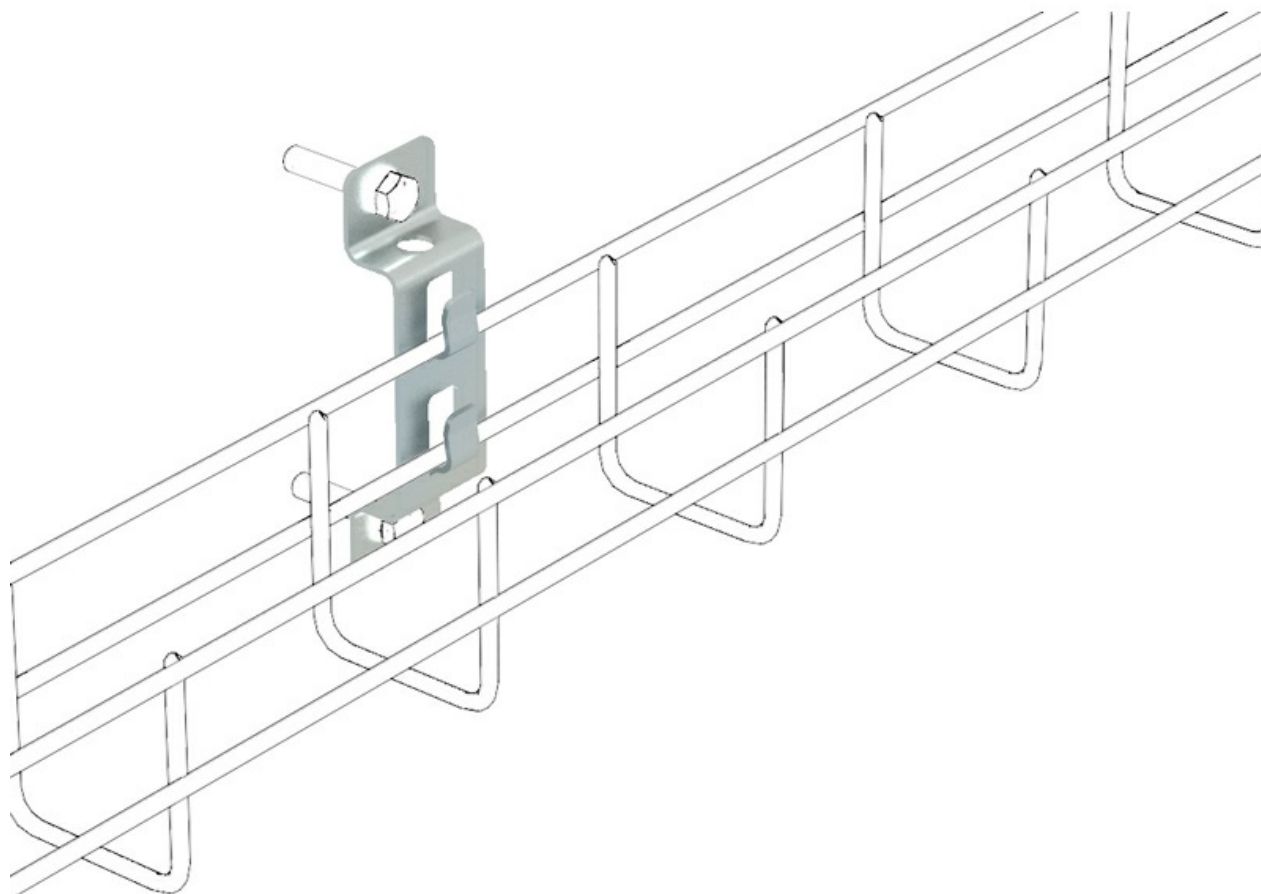

**Side Support 60**

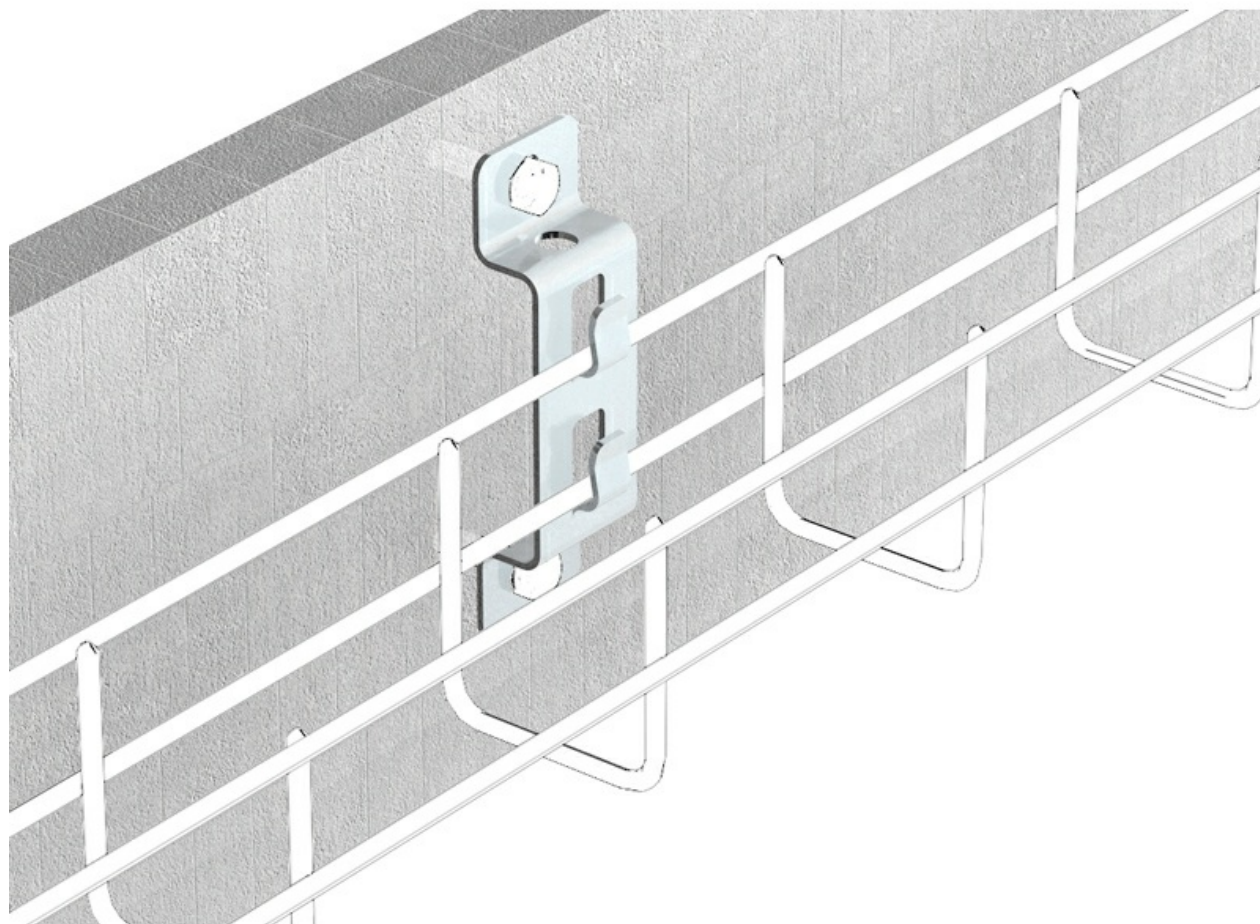

# Side Support 60

