


Stand off Bracket Click 100

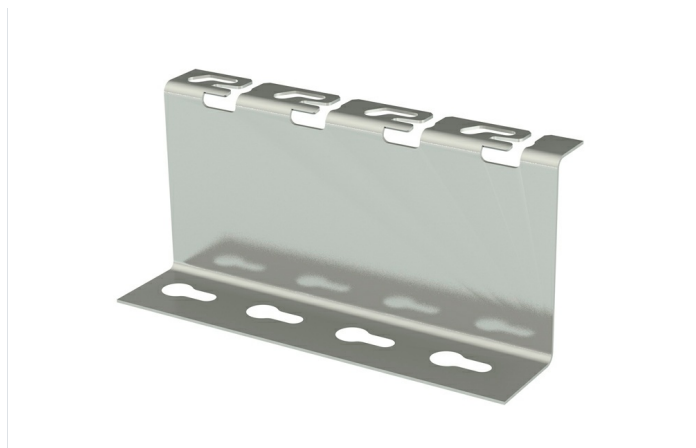

Description

Metal support that allows the installation of Rejiband® and Pemsaband® trays to the floor or wall. Click system for quick connection of wire mesh trays without any fixings and a stand off height of 100 mm. Manufactured in stainless steel AISI 316.

Advantages

Universal mounting system compatible with wire mesh trays by means of the Quick mount Click system without the need of screws or with sheet metal trays by using screws and the configuration of L-shaped M6/M8 holes.

Allows the installation of the tray at a distance of 100 mm from the wall or floor.

Facilitates handling and vertical installation of Rejiband wire mesh tray by positioning it in the click pin system.

Suitable for installation in the Food industry. Due to its height of 100 mm the process of cleaning between the installation and the wall or floor surfaces is much easier.

Applications

Main use is for the Food Industry. Suitable for horizontal and vertical installations of Rejiband® and Pemsaband® trays as well as in false floor installations.

Solutions













INDUSTRIA ALIMENTARIA FOTOVOLTAICA





www.pemsa-rejiband.com

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."

Main technical characteristics									
 INOX	 Class 9D	 100	 100, 200, 300	 10	 Acero inoxidable AISI 316L	 250	 -50 / 150 °C		
 A1 No combustible	ETIM EC000022								

Product data		
	Ref	kg/u
100	67060560	0.196
200	67060562	0.371
300	67060564	0.546

 Protection System
CU - Copper electroplated
PG - Pregalvanised
EZ - Electrogalvanised
BC - Electrogalvanised Bichromate
BK8 - High Resistance Coating
GC - Hot Dip Galvanising
INOX - Stainless Steel
PT - Polyester Paint
AL - Aluminum
LN - Brass or Nickel-plated brass

 Insulating materials
PC+ABS - Halogen Free Polycarbonate + ABS
PVC - Polyvinyl Chloride
PP - Halogen Free Polypropylene
PA6 - Halogen Free Polyamide 6
PA12 - Halogen Free Polyamide 12
PU - Polyurethane
PE - Polyethylene
NBR - NBR rubber
PET - Thermoplastic Polyester
TPV - Thermoplastic