


PEMSA**band** Inside Hanging Plate

1/2

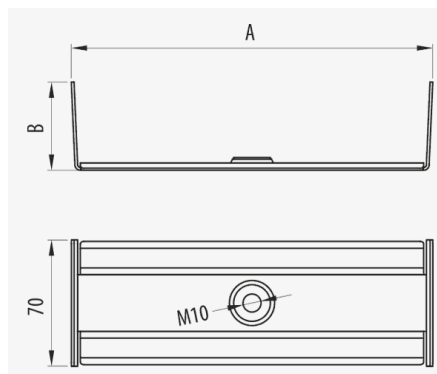

Description

Advantages

Applications

Solutions



www.pemsa-rejiband.com

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."



Main technical characteristics

 60	 100, 150, 200, 300, 400	 10	 Steel with surface coating	 -50 / 150 °C	 A1 No combustible	ETIM EC001003
--	---	--	--	--	---	------------------

Product data

	 Class EC 61537		Ref	kg/u	 CTA J 88-1
PG	Class 3	100	70122210	0.162	40
PG	Class 3	150	70122215	0.204	35
PG	Class 3	200	70122220	0.247	27
PG	Class 3	300	70122230	0.333	20
PG	Class 3	400	70122240	0.417	
GC	Class 8	100	70132210	0.167	40
GC	Class 8	150	70132215	0.211	35
GC	Class 8	200	70132220	0.255	27
GC	Class 8	300	70132230	0.343	20
GC	Class 8	400	70132240	0.430	

 Protection System

- CU** - Copper electroplated
- PG** - Pregalvanised
- EZ** - Electrogalvanised
- BC** - Electrogalvanised Bichromate
- BK8** - High Resistance Coating
- GC** - Hot Dip Galvanising
- INOX** - Stainless Steel
- PT** - Polyester Paint
- AL** - Aluminum
- LN** - Brass or Nickel-plated brass

 Insulating materials

- PC+ABS** - Halogen Free Polycarbonate + ABS
- PVC** - Polyvinyl Chloride
- PP** - Halogen Free Polypropylene
- PA6** - Halogen Free Polyamide 6
- PA12** - Halogen Free Polyamide 12
- PU** - Polyurethane
- PE** - Polyethylene
- NBR** - NBR rubber
- PET** - Thermoplastic Polyester
- TPV** - Thermoplastic