


Splice Plate n°1

Accessories

DATA SHEET

19/04/2024 1/3







Description

Straight U shape splice palte for the connection of channels as support structures in tray installations. Suitable for 41x21 mm and 41x41 mm channels. Made of steel with GC Protection System.

Advantages

It allows the joining of different sections of channel.

Connect with 4 hexagonal bolts and M10 channel nuts.

Available for 41x21 and 41x41 channels.

CE conformity to directive 2014/35 / EU.

GC protection system (standard UNE-EN ISO 1461), suitable for outdoor installations and in aggressive environments. Corrosion resistance class 6.

Applications

Suitable for connection with 41x21 mm and 41x41 mm channels for the creation of support structures for tray installations in the conduction of electric cables and / or telecommunications in public buildings, infrastructures and civil works, industrial facilities and the tertiary sector.

Solutions





INDUSTRIA PETROQUÍMICA TUNELES. INFRAESTRUCTURAS



🔣 KVE-1 🎦 🖸 👄 🖪 (E 🗱 E90

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."

pemsa

Accessories

Splice Plate n°1

19/04/2024 <mark>2/3</mark>

Main technical characteristics

ETIM

EC00048							
Product data							
S	Class IEC 61537	Ref	kg/u	¢.	0	۳. ۲	遂
GC	Class 6	67030205	0.307	1	Steel with surface coating	-50 / 150 °C	A1 No combustible
© Pro	tection Sys	tem					

CU - Copper electroplated					
PG - Pregalvanised					
EZ - Electrogalvanised					
BC - Electrogalvanised Bichromate					
BK8 - High Resistance Coating					
GC - Hot Dip Galvanising					
INOX - Stainless Steel					
PT - Polyester Paint					
AL - Aluminum					
LN - Brass or Nickel-plated brass					
◎ Insulating materials					
PC+ABS - Halogen Free Polycarbonate + ABS					
PVC - Polyvinyl Chloride					
PP - Halogen Free Polypropylene					
- Halogen Free Polyamide 6					
PA12 - Halogen Free Polyamide 12					
PU - Polyurethane					
PU - Polyurethane PE - Polyethylene					
PE - Polyethylene					

TPV - Thermoplastic



www.pemsa-rejiband.com


Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."



Accessories Splice Plate n°1

Product applications

19/04/2024 <mark>3/3</mark>

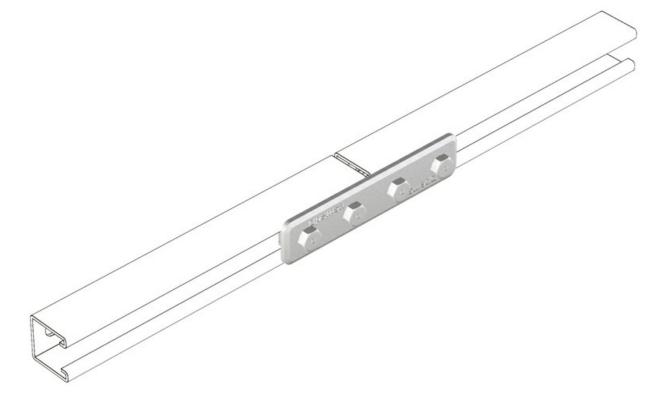



Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."

EG MUE-1 😫 🖻 👄 🖪 (E 📟 E90