
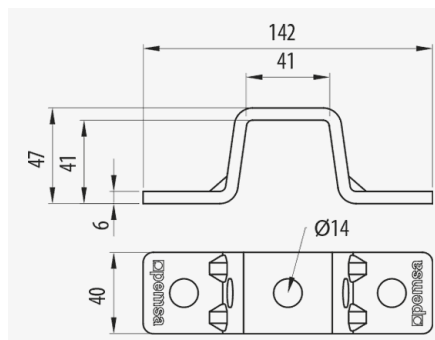


Clamp 41x41 n°12

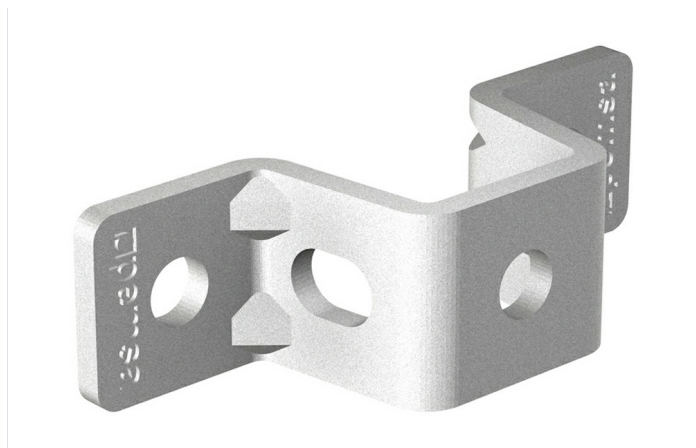

Description

U-shaped metal junction piece number 12 for rail mounting 41x41 mm in a crossover perpendicular crossing for support structures in the installation of trays. Made of steel and GC Protection System.

Advantages

Provides rigidity in the channel joints.

Connect with 3 hexagonal bolts and M10 channel nuts.

Available for 41x41 channels.

CE conformity to directive 2014/35 / EU.

GC protection system (standard UNE-EN ISO 1461), suitable for outdoor installations and in aggressive environments. Corrosion resistance class 6.

Applications

Suitable for connection with 41x41 mm channels for the creation of support structures for tray installations in the conduction of electrical cables and / or telecommunications in public buildings, infrastructures and civil works, industrial facilities and tertiary sector.

Solutions



INDUSTRIA PETROQUÍMICA TUNELES. INFRAESTRUCTURAS



www.pemsa-rejiband.com









Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."

Clamp 41x41 n°12

Main technical characteristics

ETIM
EC000482

Product data

				REF	kg/u				
GC	Class 6	41	90	67030207	0.350	1	Steel with surface coating	-50 / 150 °C	A1 No combustible

Protection System

CU - Copper electroplated

PG - Pregalvanised

EZ - Electrogalvanised

BC - Electrogalvanised Bichromate

BK8 - High Resistance Coating

GC - Hot Dip Galvanising

INOX - Stainless Steel

PT - Polyester Paint

AL - Aluminum

LN - Brass or Nickel-plated brass

Insulating materials

PC+ABS - Halogen Free Polycarbonate + ABS

PVC - Polyvinyl Chloride

PP - Halogen Free Polypropylene

PA6 - Halogen Free Polyamide 6

PA12 - Halogen Free Polyamide 12

PU - Polyurethane

PE - Polyethylene

NBR - NBR rubber

PET - Thermoplastic Polyester

TPV - Thermoplastic



Clamp 41x41 n°12

Product applications

