


RLH Coupler

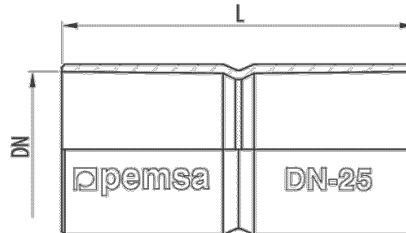

Description

Coupler for RLH type rigid conduit for the protection of electrical cables in building applications. Manufactured in halogen-free thermoplastic material (PC + ABS) with an IP44 protection rating. Push fit connection system to the conduit. Available in grey (RAL 7035) and in a wide variety of sizes.

Advantages

For connection of RLH rigid and CLH corrugated conduits.

Quick assembly via plug-in connection between conduits and fittings.

CE conformity to the 2014/35 directive and the IEC 61386 standard.

High security, halogen free material UNE/EN 60754-2 y UNE/EN 60754-1. Reduced smoke opacity and toxicity in the event of a fire. Flame retardant.

Applications

Suitable for the joining of halogen-free rigid conduits in building, tertiary and industrial applications with high safety requirements. Premises of public attendance.

Solutions



Main technical characteristics

 Colour	Grey RAL 7035	 DN	NW16, NW20, NW25, NW32, NW40, NW50, NW63	 Material	Polycarbonate + ABS	 IP	IP44	 Temp	-15 / 90 °C
	LIBRE DE HALÓGENOS,NO PROPAGADOR DE LA LLAMA			ETIM	EC000937				

Product data

DN	L _{mm}	Ref	kg/u	
NW16	39	55008016	0.004	19
NW20	47	55008020	0.006	19
NW25	57	55008025	0.008	19
NW32	67	55008032	0.012	10
NW40	71	55008040	0.017	10
NW50	91	55008050	0.025	5
NW63	107	55008063	0.037	5

 Protection System

- CU** - Copper electroplated
- PG** - Pregalvanised
- EZ** - Electrogalvanised
- BC** - Electrogalvanised Bichromate
- BK8** - High Resistance Coating
- GC** - Hot Dip Galvanising
- INOX** - Stainless Steel
- PT** - Polyester Paint
- AL** - Aluminum
- LN** - Brass or Nickel-plated brass

 Insulating materials

- PC+ABS** - Halogen Free Polycarbonate + ABS
- PVC** - Polyvinyl Chloride
- PP** - Halogen Free Polypropylene
- PA6** - Halogen Free Polyamide 6
- PA12** - Halogen Free Polyamide 12
- PU** - Polyurethane
- PE** - Polyethylene
- NBR** - NBR rubber
- PET** - Thermoplastic Polyester
- TPV** - Thermoplastic