
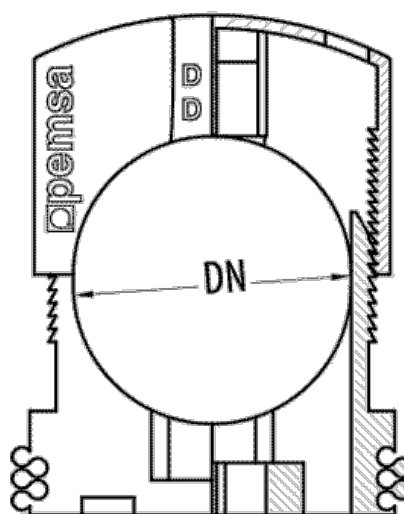


Variable Clip

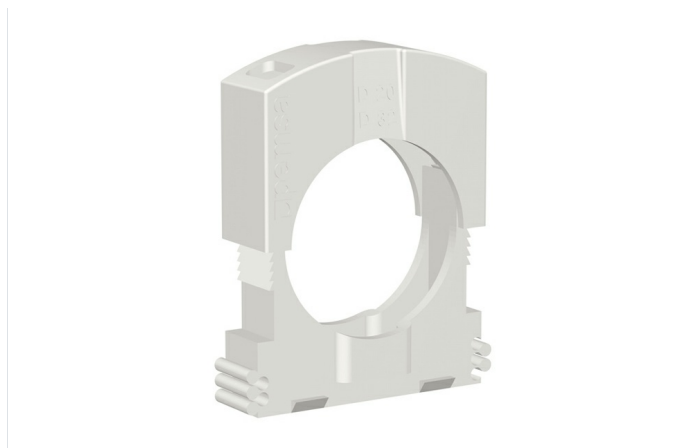

Description

Halogen-free polyamide 6 pressure clip in grey color (RAL 7035) for rigid and flexible halogen free and PVC conduits. Accessory for the assembly of the tube by means of a safety lock. Available in different sizes.

Advantages

It has a lateral connection system with another clip that allows for the parallel assembly of the conduits.

Fastening system with safety lock adaptable to various diameters of conduit.

Suitable for the fixing of rigid and corrugated conduits.

CE conformity to the 2014/35 directive and the IEC 61386 standard.

Manufactured in polyamide 6. Self-extinguishing, halogen-free according to UNE/EN 60754-2 y UNE/EN 60754-1 and flame-retardant.

Applications

Suitable for fixing RLH, CLH, RPVC and CPVC rigid and corrugated conduits for the protection of electric cables in building, tertiary and industrial applications.

Solutions



Main technical characteristics

Colour	Grey RAL 7035		Poyamide 6		-15 / 90 °C		LIBRE DE HALÓGENOS,NO PROPAGADOR DE LA LLAMA	ETIM	EC002320
--------	---------------	---	------------	---	-------------	---	--	------	----------

Product data

	Ref	kg/u	
12 / 20	55024012	0.006	50
20 / 32	55024020	0.010	40
32 / 50	55024032	0.016	20

Protection System

- CU - Copper electroplated
- PG - Pregalvanised
- EZ - Electrogalvanised
- BC - Electrogalvanised Bichromate
- BK8 - High Resistance Coating
- GC - Hot Dip Galvanising
- INOX - Stainless Steel
- PT - Polyester Paint
- AL - Aluminum
- LN - Brass or Nickel-plated brass

Insulating materials

- PC+ABS - Halogen Free Polycarbonate + ABS
- PVC - Polyvinyl Chloride
- PP - Halogen Free Polypropylene
- PA6 - Halogen Free Polyamide 6
- PA12 - Halogen Free Polyamide 12
- PU - Polyurethane
- PE - Polyethylene
- NBR - NBR rubber
- PET - Thermoplastic Polyester
- TPV - Thermoplastic

