


## RR Coupler

1/2

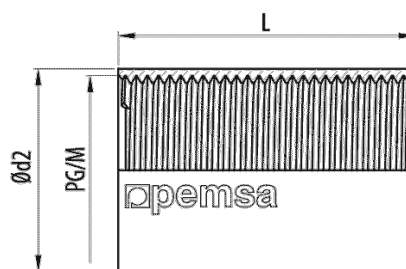

### Description

EZ Protection System steel threaded coupler for the connection of RR conduits in installations that require high mechanical performance and an average resistance to corrosion. IP54 protection index. N mark of Aenor according to IEC 61386 standard.

### Advantages

Threaded connection for joining RR conduits or accessories.

Protection index EN 60529: IP54.

Working temperature: -45°C to + 400°C.

CE conformance with the directive 2014/35 and the IEC 61386 standard. N mark of Aenor according to IEC 61386.

Manufactured in PG protection system (standard EN-ISO 2081), suitable for indoor installations. Grade 2 corrosion resistance, according to IEC 61386. Medium indoor and outdoor protection.

### Applications

Suitable for joining RR threaded metal rigid conduits in building, tertiary and industrial applications with high safety requirements. Premises of public attendance and premises with risk of fire or explosion.

### Solutions



[www.pemsa-rejiband.com](http://www.pemsa-rejiband.com)

Any information included in this document is property of Pemsal®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsal®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsal, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsal Cable Management, S.A."



Main technical characteristics						
Ⓢ EZ	Ⓢ EZ2, Electrogalvanised	DN NW16, NW20, NW25, NW32, NW40, NW50, NW63	Ⓢ M16, M20, M25, M32, M40, M50, M63			
Ⓜ Steel with surface coating	Ⓢ IP65	Ⓢ -45 / 400 °C	Ⓢ LIBRE DE HALÓGENOS,NO PROPAGADOR DE LA LLAMA		ETIM EC000937	

Product data						
DN	Ⓢ	Ⓢ	L <sub>mm</sub>	Ref	kg/u	Ⓢ
NW16	M16	18.5	30	55004016	0.024	50
NW20	M20	22.5	35	55004020	0.035	50
NW25	M25	27.5	40	55004025	0.050	50
NW32	M32	34.5	43	55004032	0.069	25
NW40	M40	42.5	43	55004040	0.086	20
NW50	M50	52.5	52	55004050	0.131	10
NW63	M63	65.5	63	55004063	0.199	6

Ⓢ Protection System
CU - Copper electroplated
PG - Pregalvanised
EZ - Electrogalvanised
BC - Electrogalvanised Bichromate
BK8 - High Resistance Coating
GC - Hot Dip Galvanising
INOX - Stainless Steel
PT - Polyester Paint
AL - Aluminum
LN - Brass or Nickel-plated brass

Ⓜ Insulating materials
PC+ABS - Halogen Free Polycarbonate + ABS
PVC - Polyvinyl Chloride
PP - Halogen Free Polypropylene
PA6 - Halogen Free Polyamide 6
PA12 - Halogen Free Polyamide 12
PU - Polyurethane
PE - Polyethylene
NBR - NBR rubber
PET - Thermoplastic Polyester
TPV - Thermoplastic