


RL RR Rigid Conduit Accessories

TL Tee

24/04/2024 1/2



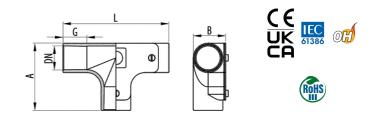

Description

Push fit Tee with removable cover for the connection of RL conduits in installations requiring high mechanical performance and medium resistance to corrosion. With an IP54 protection index. Accessory to create a branch in the conduit run. Made of aluminium and available in different diameters.

Advantages

Push fit connection system. Accessory to create branches in the routing of cable conduits.

Protection index EN 60529: IP54.

Compatible with rigid RAL aluminum conduits, for installations requiring high resistance to corrosion.

CE conformity to the 2014/35 directive and the IEC 61386 standard.

Made of cast aluminum. Grade 4 corrosion resistance, according to IEC 61386. High indoor and outdoor protection.

Applications

Suitable for the connection of rigid RL and RAL metal conduits in building, tertiary and industrial applications with high safety requirements. Premises of public attendance and premises with risk of fire or explosion.

Solutions





Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."

pemsa

RL RR Rigid Conduit Accessories							24/04/2024
TL Tee							2/2
Main technical ch	aracteristics						
S AL 🕞 ALU, A	Aluminium DN	NW16, NW20, N	W25, NW32, NW	40, NW50) Aluminum 🕡 IP54 🛛	± -45 / 400	
LIBRE DE HALÓGEN LLAMA	IOS,NO PROPAGAD	OR DE LA	ETIM EC002922			°C	
Product data							
DN	ta Bt	L _(mm)	A _(mm)	B(mm)	Ref	kg/u	¢.
NW16	20	96	61	30.5	55081016	0.129	10
NW20	21.5	96	61	30.5	55081020	0.112	10
NW25	26.5	111	71	35.5	55081025	0.150	8
NW32	32	146	96	51.5	55081032	0.448	2
NW40	33.5	146	96	51.5	55081040	0.345	2
NW50	43.5	183	120	61.5	55081050	0.567	1

© Protection System

CU - Copper electroplated

PG - Pregalvanised

EZ - Electrogalvanised

- BC Electrogalvanised Bichromate
- BK8 High Resistance Coating

 $\boldsymbol{\mathsf{GC}}$ - Hot Dip Galvanising

INOX - Stainless Steel

PT - Polyester Paint

AL - Aluminum

LN - Brass or Nickel-plated brass

M Insulating materials

PC+ABS - Halogen Free Polycarbonate + ABS

PVC - Polyvinyl Chloride

PP - Halogen Free Polypropylene

PA6 - Halogen Free Polyamide 6

PA12 - Halogen Free Polyamide 12

PU - Polyurethane

PE - Polyethylene

NBR - NBR rubber

PET - Thermoplastic Polyester

TPV - Thermoplastic



www.pemsa-rejiband.com

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."

E C E E C E