
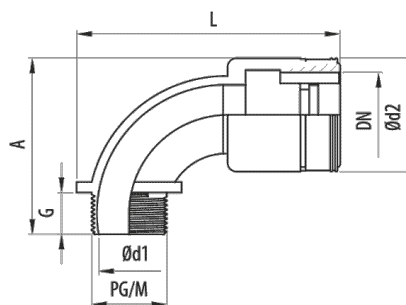


RAP 90° Connector

1/3

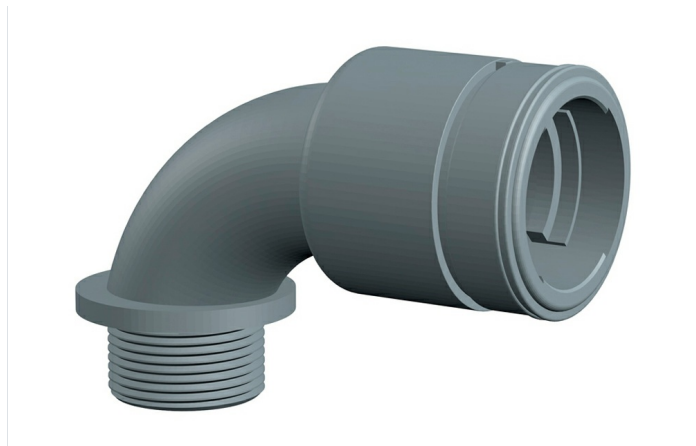

Description

90° coupling in self-extinguishing polyamide 6 with external thread in RAL 7011 grey or RAL 9005 black, metric and PG thread, halogen-free, flame retardant, IP67 protection rating. The RAP 90 connector is suitable for the installation of Pemsaflex® LG-PA, ST-PA, RF-PA, RB-PA and RB-PU flexible conduits where a 90° angle is required.

Advantages

Manufactured in polyamide 6. Self-extinguishing, halogen-free according to UNE/EN 60754-2 y UNE/EN 60754-1 and flame-retardant.

Click connection system that allows easy and fast coupling to the conduit.

Suitable for creating 90° angles in conduit assemblies.

Working temperature: -25°C to + 105°C. Degree of protection IP67 according to classification EN60529.

UL, CSA and DNV certification. CE conformance with the 2014/35 directive and the IEC 61386 standard. Halogen-free according to EN 50267-2-1 standard. In accordance with standard EN 60204-1 (machine safety).

Applications

Suitable for the connection of Pemsaflex®, LG-PA, ST-PA, RF-PA, RB-PA and RB-PU conduits for the protection of wiring and conductors in electrical installations of machines, tools, industrial equipment, robots , vehicles and special facilities.

Solutions



www.pemsa-rejiband.com

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."



RAP 90° Connector

Main technical characteristics

Colour	Grey RAL 7011, Black RAL 9005	DN	NW10, NW12, NW17, NW23, NW29, NW36, NW48		M16, M20, M25, M32, M40, M50, M63	90
--------	-------------------------------	----	--	---	-----------------------------------	----

Poyamide 6	IP67	-25 / 105 °C	LIBRE DE HALÓGENOS,NO PROPAGADOR DE LA LLAMA	EC001176
--	--	--	--	----------

Product data

COLOUR	DN					L_{mm}	A_{mm}	Ref	kg/u	
Grey RAL 7011	NW10	M16	11	9.9	21.1	56	37.6	31130116	0.007	50
Grey RAL 7011	NW10	M20	11	9.9	21.1	59.3	37.6	31130120	0.008	50
Grey RAL 7011	NW12	M16	11	8.7	24.3	59.3	41	31130216	0.011	50
Grey RAL 7011	NW12	M20	11	12	24.3	59.3	41	31130220	0.011	50
Grey RAL 7011	NW17	M20	13	14.7	30.4	68.5	48.2	31130420	0.017	50
Grey RAL 7011	NW17	M25	13.5	16.7	30.4	71	48.2	31130425	0.019	50
Grey RAL 7011	NW23	M25	14	20.1	40	87.8	59	31130525	0.027	30
Grey RAL 7011	NW23	M32	14	22.1	40	88.1	59	31130532	0.027	30
Grey RAL 7011	NW29	M32	14	25.7	46	98	66	31130632	0.047	30
Grey RAL 7011	NW29	M40	14	28.6	46	99	66	31130640	0.047	30
Grey RAL 7011	NW36	M40	14	28.3	56	110.4	78	31130740	0.084	10
Grey RAL 7011	NW36	M50	14	36	56	113.4	78	31130750	0.084	10
Grey RAL 7011	NW48	M50	14	41.2	70	129.5	91.5	31130850	0.124	10
Grey RAL 7011	NW48	M63	14	49	70	134	91.5	31130863	0.124	10
Black RAL 9005	NW10	M16	11	9.9	21.1	56	37.6	32130116	0.007	50
Black RAL 9005	NW10	M20	11	9.9	21.1	59.3	37.6	32130120	0.008	50
Black RAL 9005	NW12	M16	11	8.7	24.3	59.3	41	32130216	0.011	50
Black RAL 9005	NW12	M20	11	12	24.3	59.3	41	32130220	0.011	50
Black RAL 9005	NW17	M20	13	14.7	30.4	68.5	48.2	32130420	0.017	50
Black RAL 9005	NW17	M25	13.5	16.7	30.4	71	48.2	32130425	0.019	50
Black RAL 9005	NW23	M25	14	20.1	40	87.8	59	32130525	0.027	30
Black RAL 9005	NW23	M32	14	22.1	40	88.1	59	32130532	0.027	30
Black RAL 9005	NW29	M32	14	25.7	46	98	66	32130632	0.047	30
Black RAL 9005	NW29	M40	14	28.6	46	99	66	32130640	0.047	30
Black RAL 9005	NW36	M40	14	28.3	56	110.4	78	32130740	0.084	10
Black RAL 9005	NW36	M50	14	36	56	113.4	78	32130750	0.084	10
Black RAL 9005	NW48	M50	14	41.2	70	129.5	91.5	32130850	0.124	10
Black RAL 9005	NW48	M63	14	49	70	134	91.5	32130863	0.124	10

Protection System

CU - Copper electroplated

PG - Pregalvanised

EZ - Electrogalvanised

BC - Electrogalvanised Bichromate

BK8 - High Resistance Coating



www.pemsa-rejiband.com

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Reijband, Pemsaband, Inducanal, Rejtech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."



- GC - Hot Dip Galvanising
- INOX - Stainless Steel
- PT - Polyester Paint
- AL - Aluminum
- LN - Brass or Nickel-plated brass

 Insulating materials

- PC+ABS - Halogen Free Polycarbonate + ABS
- PVC - Polyvinyl Chloride
- PP - Halogen Free Polypropylene
- PA6 - Halogen Free Polyamide 6
- PA12 - Halogen Free Polyamide 12
- PU - Polyurethane
- PE - Polyethylene
- NBR - NBR rubber
- PET - Thermoplastic Polyester
- TPV - Thermoplastic

