


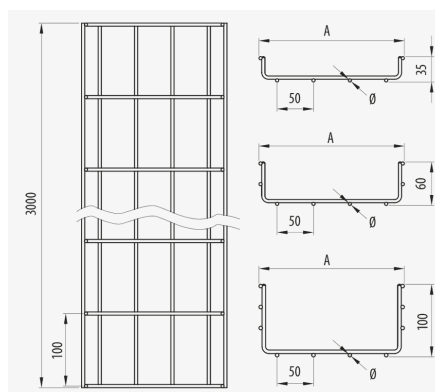

Description

60 mm high steel wire mesh tray with surface protection, or stainless steel AISI 304 or 316L, with safety edge for support and management of cables. The Rejiband cable tray is made up of a mesh of electrowelded rods that provide high strength and elasticity. The ease of installation, thanks to its flexibility saves on material and labour costs. Manufactured according to international standard IEC 61537. Its wide variety of sizes and Protection Systems facilitates the most appropriate choice according to the needs of each installation.

Advantages

High resistance, flexibility and adaptable to each project providing a saving of more than 30% in the installation.

Rounded safety edge that prevents damage to the cables and harm to the installer.

N Mark of Aenor, UL Certificate, Certificate IECC CB according to IEC 61537.

E90 fire resistance (90 minutes, 1000°C) according to DIN 4102-12.

Flange height 60 mm and available in widths of 60, 100, 150, 200, 300, 400, 450, 500 and 600 mm with a wide range of accessories.

Applications

Support, management and distribution of cables in Electrical and/or telecommunications installations in: Civil Works, Tunnels, Car Parks, Public Buildings, Shopping Centres, Data Processing Centres, Infrastructures, Airports, Underground and Railway. Tertiary sector and industrial applications: Naval, Petrochemical, Textile, Chemical and Food. Indoor applications in the dry or in exterior atmospheres with wet environments according to the various finishes.

Solutions



INDUSTRIA ALIMENTARIA INDUSTRIA QUIMICA FARMACEUTICA INDUSTRIA PETROQUÍMICA ENERGÍA FOTOVOLTAICA CENTROS DE DATOS EDIFICACIÓN. TERCARIO



TUNELES. INFRAESTRUCTURAS RESISTENCIA AL FUEGO



www.pemsa-rejiband.com

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."



Main technical characteristics

 60	 60, 100, 150, 200, 300, 400, 450, 500, 600	 20 J	 -50 / 150 °C	ETIM EC000853
--	--	--	--	------------------

Product data

Ⓢ	Class			Ref	kg/u		Ⓜ	mm ²	
EZ	Class 3	60	3	60212060	0.562	24	Steel with surface coating	2492	A1 No combustible
EZ	Class 3	100	3	60212100	0.796	24	Steel with surface coating	4442	E90 (90 min. 1000°C)
EZ	Class 3	150	3	60212150	0.844	24	Steel with surface coating	6976	E90 (90 min. 1000°C)
EZ	Class 3	200	3	60212200	1.089	18	Steel with surface coating	9586	E90 (90 min. 1000°C)
EZ	Class 3	300	3	60212300	1.695	12	Steel with surface coating	14420	E90 (90 min. 1000°C)
EZ	Class 3	400	3	60212400	2.072	6	Steel with surface coating	19540	E90 (90 min. 1000°C)
EZ	Class 3	450	3	60212450	2.125	6	Steel with surface coating	22100	E90 (90 min. 1000°C)
EZ	Class 3	500	3	60212500	2.438	6	Steel with surface coating	24660	A1 No combustible
EZ	Class 3	600	3	60212600	2.806	6	Steel with surface coating	29780	A1 No combustible
BC	Class 5	200	3	60222200	1.089	18	Steel with surface coating	9586	E90 (90 min. 1000°C)
BC	Class 5	450	3	60222450	2.125	6	Steel with surface coating	22100	A1 No combustible
BC	Class 5	500	3	60222500	2.438	6	Steel with surface coating	24660	A1 No combustible
GC	Class 7	60	3	60232060	0.590	24	Steel with surface coating	2492	A1 No combustible
GC	Class 7	100	3	60232100	0.834	24	Steel with surface coating	4442	E90 (90 min. 1000°C)
GC	Class 7	150	3	60232150	0.901	24	Steel with surface coating	6976	E90 (90 min. 1000°C)
GC	Class 7	200	3	60232200	1.191	18	Steel with surface coating	9586	E90 (90 min. 1000°C)
GC	Class 7	300	3	60232300	1.911	12	Steel with surface coating	14420	E90 (90 min. 1000°C)
GC	Class 7	400	3	60232400	2.382	6	Steel with surface coating	19540	E90 (90 min. 1000°C)
GC	Class 7	500	3	60232500	2.883	6	Steel with surface coating	24660	A1 No combustible
GC	Class 7	600	3	60232600	3.393	6	Steel with surface coating	29780	A1 No combustible
INOX	Class 9C	60	3	60252060	0.557	24	Stainless steel AISI 304	2492	A1 No combustible
INOX	Class 9C	100	3	60252100	0.786	24	Stainless steel AISI 304	4442	E90 (90 min. 1000°C)
INOX	Class 9C	150	3	60252150	1.018	24	Stainless steel AISI 304	6834	E90 (90 min. 1000°C)
INOX	Class 9C	200	3	60252200	1.319	18	Stainless steel AISI 304	9414	E90 (90 min. 1000°C)
INOX	Class 9C	300	3	60252300	1.695	12	Stainless steel AISI 304	14574	E90 (90 min. 1000°C)
INOX	Class 9C	400	3	60252400	2.072	6	Stainless steel AISI 304	19734	A1 No combustible
INOX	Class 9C	500	3	60252500	2.438	6	Stainless steel AISI 304	24894	A1 No combustible
INOX	Class 9C	600	3	60252600	2.806	6	Stainless steel AISI 304	30054	E90 (90 min. 1000°C)
INOX	Class 9D	60	3	60262060	0.557	24	Acero inoxidable AISI 316L	2492	A1 No combustible
INOX	Class 9D	100	3	60262100	0.786	24	Acero inoxidable AISI 316L	4442	E90 (90 min. 1000°C)
INOX	Class 9D	150	3	60262150	1.018	24	Acero inoxidable AISI 316L	6834	E90 (90 min. 1000°C)
INOX	Class 9D	200	3	60262200	1.319	18	Acero inoxidable AISI 316L	9414	E90 (90 min. 1000°C)
INOX	Class 9D	300	3	60262300	1.695	12	Acero inoxidable AISI 316L	14574	E90 (90 min. 1000°C)
INOX	Class 9D	400	3	60262400	2.072	6	Acero inoxidable AISI 316L	19734	E90 (90 min. 1000°C)
INOX	Class 9D	500	3	60262500	2.438	6	Acero inoxidable AISI 316L	24894	A1 No combustible
INOX	Class 9D	600	3	60262600	2.806	6	Acero inoxidable AISI 316L	30054	A1 No combustible

Ⓢ	Qualif 61537	W	H	Ref	kg/u	Ⓜ		mm²	⚡
BK8	Class 8	60	3	60282060	0.562	24	Steel with surface coating	2492	A1 No combustible
BK8	Class 8	100	3	60282100	0.796	24	Steel with surface coating	4442	E90 (90 min. 1000°C)
BK8	Class 8	150	3	60282150	0.844	24	Steel with surface coating	6976	E90 (90 min. 1000°C)
BK8	Class 8	200	3	60282200	1.089	18	Steel with surface coating	9586	E90 (90 min. 1000°C)
BK8	Class 8	300	3	60282300	1.695	12	Steel with surface coating	14420	E90 (90 min. 1000°C)
BK8	Class 8	400	3	60282400	2.072	6	Steel with surface coating	19540	E90 (90 min. 1000°C)
BK8	Class 8	450	3	60282450	2.125	6	Steel with surface coating	22100	A1 No combustible
BK8	Class 8	500	3	60282500	2.438	6	Steel with surface coating	24660	A1 No combustible
BK8	Class 8	600	3	60282600	2.806	6	Steel with surface coating	29780	A1 No combustible
CU	Class 1	100	2	82003241	0.793	16	Steel with surface coating	4442	A1 No combustible
CU	Class 1	150	2	82003242	0.847	16	Steel with surface coating	6976	A1 No combustible
CU	Class 1	200	2	82003243	1.094	12	Steel with surface coating	9586	A1 No combustible
CU	Class 1	300	2	82003244	1.702	8	Steel with surface coating	14420	A1 No combustible
CU	Class 1	450	2	82003245	2.134	4	Steel with surface coating	22100	A1 No combustible
CU	Class 1	600	2	82003247	2.810	4	Steel with surface coating	29780	A1 No combustible


Ⓢ Protection System

- CU - Copper electroplated
- PG - Pregalvanised
- EZ - Electrogalvanised
- BC - Electrogalvanised Bichromate
- BK8 - High Resistance Coating
- GC - Hot Dip Galvanising
- INOX - Stainless Steel
- PT - Polyester Paint
- AL - Aluminum
- LN - Brass or Nickel-plated brass

Ⓜ Insulating materials


- PC+ABS - Halogen Free Polycarbonate + ABS
- PVC - Polyvinyl Chloride
- PP - Halogen Free Polypropylene
- PA6 - Halogen Free Polyamide 6
- PA12 - Halogen Free Polyamide 12
- PU - Polyurethane
- PE - Polyethylene
- NBR - NBR rubber
- PET - Thermoplastic Polyester
- TPV - Thermoplastic

Load diagrams

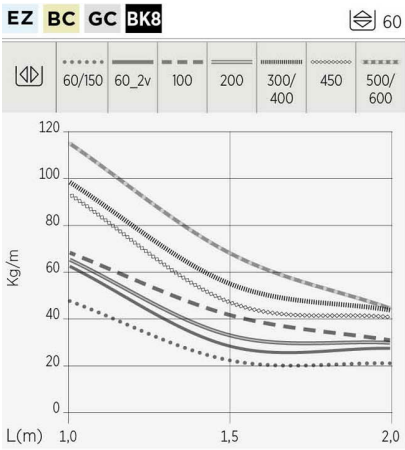

				
				mm ²
				60
				100
				150
				200
				300
				400
				450
				500
				600

Valores certificados por:
Values certified by:
Valeurs certifiées par:
Valores certificados por:

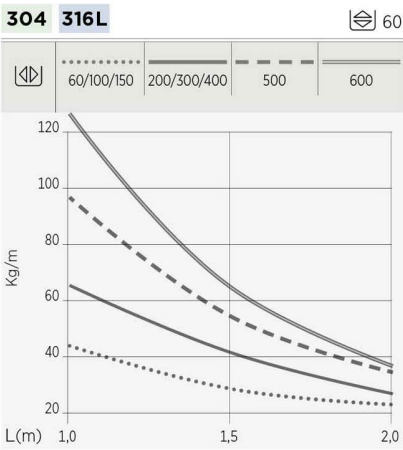

			mm ²
		100	4.420
		150	6.783
		200	9.333
		300	14.050
		400	19.050
		500	24.050
		600	29.050

Valores certificados por:
Values certified by:
Valeurs certifiées par:
Valores certificados por:



Product applications

