
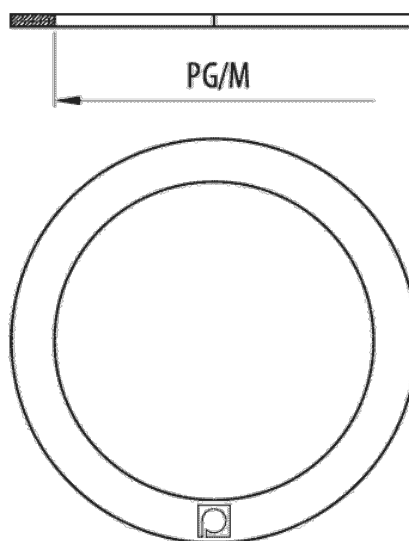


Flat Ring

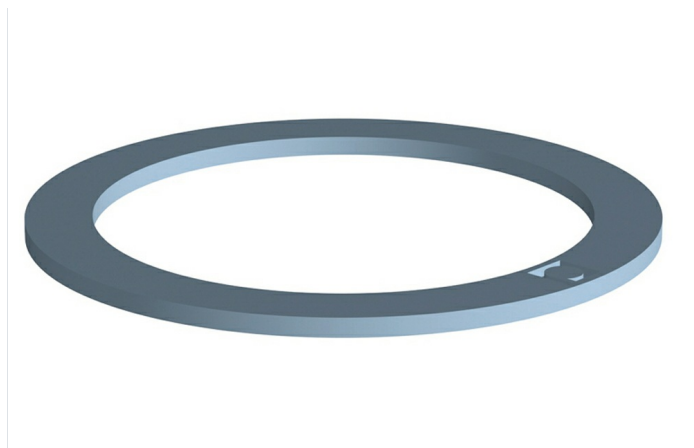

Description

Flat ring of NBR elastomer in blue colour, metric and PG thread for use with external threaded fittings and cable glands to provide an IP67 protection index to the joint. Available in various sizes.

Advantages

Improves the seal of the fitting or cable gland on the box, reaching IP67.

Available in blue.

Available in metric thread: M12, M16, M20, M25, M32, M40 M50 and M63 and PG thread: 7, 9, 11, 13.5, 16, 21, 29, 36 and 48.

CE conformity to the 2014/35 directive and the IEC 61386 standard.

Manufactured in NBR elastomer.

Applications

Suitable for use on an external thread to improve the tightness of the joint with the boxes. Can be used for any range of fittings, conduits or cable glands.

Solutions



Main technical characteristics

COLOUR	Blue RAL 5024	PG	PG 7, PG 9, PG11, PG13, PG16, PG21, PG29, PG36, PG48, M12, M16, M20, M25, M32, M40, M50, M63	M	NBR
IP	IP67	Temp	-25 / 105 °C	Flame	Flame retardant
ETIM	ETIM EC000098				

Product data

	Ref	kg/u	
PG 7	39092007	0.000	100
PG 9	39092009	0.001	100
PG11	39092011	0.001	100
PG13	39092013	0.001	50
PG16	39092016	0.001	50
PG21	39092021	0.001	50
PG29	39092029	0.001	30
PG36	39092036	0.001	10
PG48	39092048	0.002	10
M12	39092112	0.000	50
M16	39092116	0.000	50
M20	39092120	0.001	50
M25	39092125	0.001	50
M32	39092132	0.001	30
M40	39092140	0.002	10
M50	39092150	0.003	10
M63	39092163	0.002	10

Protection System

- CU - Copper electroplated
- PG - Pregalvanised
- EZ - Electrogalvanised
- BC - Electrogalvanised Bichromate
- BK8 - High Resistance Coating
- GC - Hot Dip Galvanising
- INOX - Stainless Steel
- PT - Polyester Paint
- AL - Aluminum
- LN - Brass or Nickel-plated brass

Insulating materials

- PC+ABS - Halogen Free Polycarbonate + ABS
- PVC - Polyvinyl Chloride
- PP - Halogen Free Polypropylene
- PA6 - Halogen Free Polyamide 6

Flat Ring

- PA12 - Halogen Free Polyamide 12
- PU - Polyurethane
- PE - Polyethylene
- NBR - NBR rubber
- PET - Thermoplastic Polyester
- TPV - Thermoplastic

