


## HSK-INOX-HD Cablegland

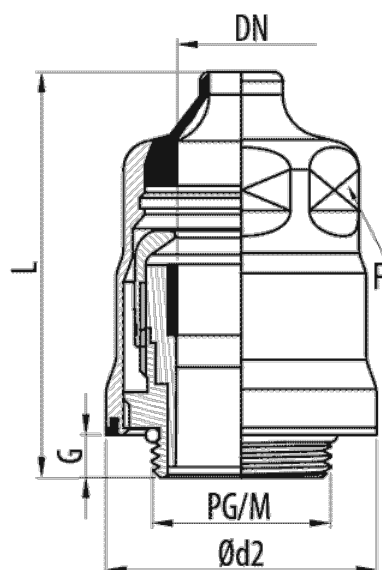

### Description

Metal hygienic design cable gland with improved diaphragm closure system with NBR seal, outer element with rounded edges, blue silicone membrane and IP68 protection rating (10 bar) according to EN 60529. Available in metric thread of M12 to M32 for different cable diameters. Manufactured in stainless steel AISI 304. Hygienic design for the protection against cleaning processes in applications in the food industry, clean rooms, etc.

### Advantages

Material in stainless steel AISI 316L, resistant to corrosion according to IEC 62444.

Hygienic design. The cable gland has an outer element with rounded edges and a blue silicone membrane that improves the sealing of the cable and reduces any edges or surfaces for easy cleaning and hygiene.

Improved diaphragm closure system with NBR inner seal.

Working temperature: -40°C to + 100°C.

CE conformity with regard to directive 2014/35 and standard IEC 62444.

### Applications

Its use is recommended for the protection of wiring and conductors with high sealing requirements in industrial, food, pharmaceutical, OEM equipment manufacturing, outdoor and industrial applications. Hygienic design for protection against cleaning processes in applications in the food industry, clean rooms, etc.

### Solutions



INDUSTRIA ALIMENTARIA





[www.pemsa-rejiband.com](http://www.pemsa-rejiband.com)









Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."



Main technical characteristics

 INOX	 Stainless Steel AISI 316L	 M12, M16, M20, M25	 6	 ACERO INOXIDABLE AISI 316L,SILICONA	 IP68
 -25 / 120 °C	 LIBRE DE HALÓGENOS,NO PROPAGADOR DE LA LLAMA	ETIM EC000441			

Product data

							
M12	3 / 6.5	21	36	14	22040120	0.008	10
M16	5 / 10	27	40	20	22040160	0.065	10
M20	10 / 14	33	40.5	24	22040200	0.080	5
M25	13 / 18	40	48.5	30	22040250	0.139	5

Protection System

- CU - Copper electroplated
- PG - Pregalvanised
- EZ - Electrogalvanised
- BC - Electrogalvanised Bichromate
- BK8 - High Resistance Coating
- GC - Hot Dip Galvanising
- INOX - Stainless Steel
- PT - Polyester Paint
- AL - Aluminum
- LN - Brass or Nickel-plated brass

Insulating materials

- PC+ABS - Halogen Free Polycarbonate + ABS
- PVC - Polyvinyl Chloride
- PP - Halogen Free Polypropylene
- PA6 - Halogen Free Polyamide 6
- PA12 - Halogen Free Polyamide 12
- PU - Polyurethane
- PE - Polyethylene
- NBR - NBR rubber
- PET - Thermoplastic Polyester
- TPV - Thermoplastic

