


Side Support 60

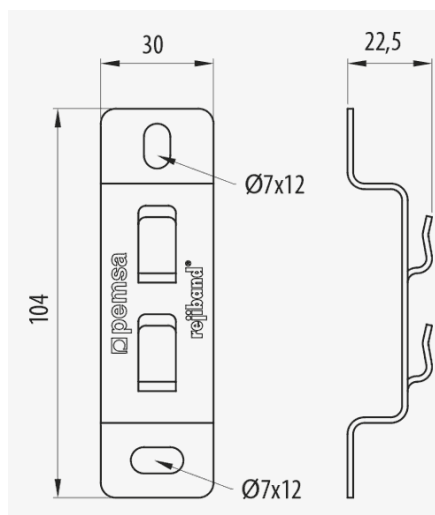

Description

Rejiband® support in steel used for the wall installation of the Rejiband® wire mesh tray 60 mm high and 60, 100 and 150 mm wide. Can also be used for ceiling installation with rod. Quick assembly thanks to the Click system of connection without the need of screws. Available in various Protection Systems.

Advantages

Fixing by quick mount click system.

Suitable for ceiling installation using an M8 threaded rod. It allows easy adjustment on the rod and only requires a nut for fixing.

Can be used for ceiling installations with two rejiband trays using a bracket on each side of the tray.

It allows the introduction of cables into the tray from the side.

Available in different protection systems: EZ and GC stainless steel AISI 316.

Applications

Suitable for wall and ceiling mounting with threaded rod of Rejiband® wire mesh tray 60 mm wide and widths of 100 and 150. Suitable for electrical and telecommunication installations in public buildings, infrastructures and civil works, industrial installations, tertiary sector.

Solutions



INDUSTRIA ALIMENTARIA



www.pemsa-rejiband.com






Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."

Main technical characteristics

 25	 25	 -50 / 150 °C	 A1 No combustible	ETIM EC000022
--	--	--	---	------------------

Product data

	 61537	Ref	kg/u	
EZ	Class 3	62011060	0.043	Steel with surface coating
BC	Class 5	62021060	0.043	Steel with surface coating
GC	Class 8	62031060	0.044	Steel with surface coating
INOX	Class 9D	62061060	0.042	Acero inoxidable AISI 316L
BK8	Class 8	62081060	0.043	Steel with surface coating
CU	Class 1	82003262	0.041	Steel with surface coating

 Protection System

- CU** - Copper electroplated
- PG** - Pregalvanised
- EZ** - Electrogalvanised
- BC** - Electrogalvanised Bichromate
- BK8** - High Resistance Coating
- GC** - Hot Dip Galvanising
- INOX** - Stainless Steel
- PT** - Polyester Paint
- AL** - Aluminum
- LN** - Brass or Nickel-plated brass

 Insulating materials

- PC+ABS** - Halogen Free Polycarbonate + ABS
- PVC** - Polyvinyl Chloride
- PP** - Halogen Free Polypropylene
- PA6** - Halogen Free Polyamide 6
- PA12** - Halogen Free Polyamide 12
- PU** - Polyurethane
- PE** - Polyethylene
- NBR** - NBR rubber
- PET** - Thermoplastic Polyester
- TPV** - Thermoplastic



Side Support 60

Product applications

