


Insert-A

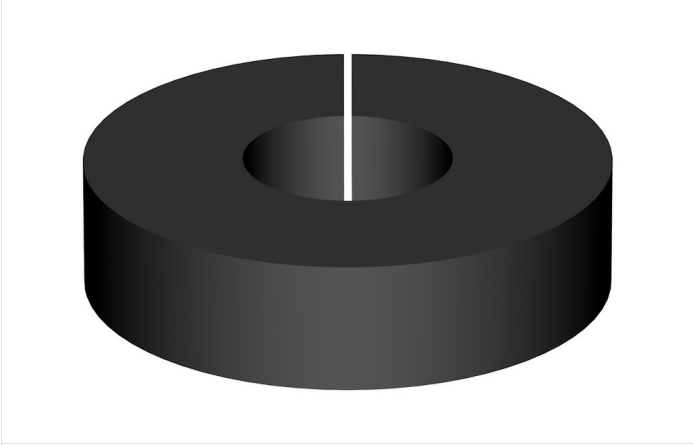

Description

Advantages

Applications

Solutions



Main technical characteristics

COLOUR	Black RAL 9005	DN	NW 5	PG	PG13, PG16, PG21	1	M	NBR	IP	IP65	°C	-40 / 100 °C
✂	LIBRE DE HALÓGENOS,NO PROPAGADOR DE LA LLAMA			ETIM	-							

Product data

PG	DN	Ref	kg/u	PG
PG13	16	40030913	0.002	50
PG16	18	40030916	0.002	25
PG21	22	40030921	0.004	25

Protection System

CU - Copper electroplated

PG - Pregalvanised

EZ - Electrogalvanised

BC - Electrogalvanised Bichromate

BK8 - High Resistance Coating

GC - Hot Dip Galvanising

INOX - Stainless Steel

PT - Polyester Paint

AL - Aluminum

LN - Brass or Nickel-plated brass

Insulating materials

PC+ABS - Halogen Free Polycarbonate + ABS

PVC - Polyvinyl Chloride

PP - Halogen Free Polypropylene

PA6 - Halogen Free Polyamide 6

PA12 - Halogen Free Polyamide 12

PU - Polyurethane

PE - Polyethylene

NBR - NBR rubber

PET - Thermoplastic Polyester

TPV - Thermoplastic

