


Click Divider

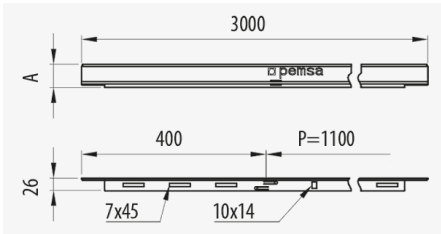

Description

Advantages

Applications

Solutions



INDUSTRIA ALIMENTARIA



www.pemsa-rejiband.com










Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."

Main technical characteristics

 35, 60, 85	 3	 -50 / 150 °C	 A1 No combustible	ETIM EC001000
--	---	--	---	------------------

Product data

						
PG	Class 3	35	67020610	0.207	60	Steel with surface coating
PG	Class 3	60	67020611	0.309	48	Steel with surface coating
PG	Class 3	85	67020612	0.439	36	Steel with surface coating
INOX	Class 9C	35	67050610	0.205	60	Stainless steel AISI 304
INOX	Class 9C	60	67050611	0.303	48	Stainless steel AISI 304
INOX	Class 9C	85	67050612	0.429	36	Stainless steel AISI 304
AZ+	Class 8	60	81000312	0.386	48	Steel with surface coating

Protection System

- CU - Copper electroplated
- PG - Pregalvanised
- EZ - Electrogalvanised
- BC - Electrogalvanised Bichromate
- BK8 - High Resistance Coating
- GC - Hot Dip Galvanising
- INOX - Stainless Steel
- PT - Polyester Paint
- AL - Aluminum
- LN - Brass or Nickel-plated brass

Insulating materials

- PC+ABS - Halogen Free Polycarbonate + ABS
- PVC - Polyvinyl Chloride
- PP - Halogen Free Polypropylene
- PA6 - Halogen Free Polyamide 6
- PA12 - Halogen Free Polyamide 12
- PU - Polyurethane
- PE - Polyethylene
- NBR - NBR rubber
- PET - Thermoplastic Polyester
- TPV - Thermoplastic



Product applications

