


IRIS XL Cablegland

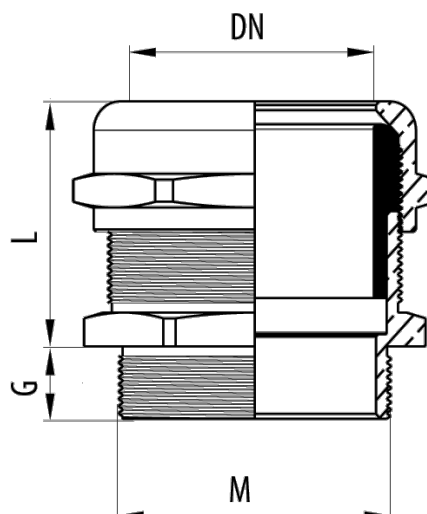

Description

Advantages

Applications

Solutions



Main technical characteristics

 LTN	 Nickel-plated brass	 M63, M75, M80, M90	 LATÓN NIQUELADO,NBR	 IP68	 -20 / 100 °C	
 LIBRE DE HALÓGENOS,NO PROPAGADOR DE LA LLAMA			ETIM			

Product data

					Ref	kg/u	
M63	15	45 / 55	63	70	21087630	0.518	5
M75	20	50 / 63	68	85	21087750	0.707	2
M80	20	50 / 63	78	90	21087800	0.877	2
M90	20	60 / 70	81	100	21087900	1.120	1

 Protection System

- CU - Copper electroplated
- PG - Pregalvanised
- EZ - Electrogalvanised
- BC - Electrogalvanised Bichromate
- BK8 - High Resistance Coating
- GC - Hot Dip Galvanising
- INOX - Stainless Steel
- PT - Polyester Paint
- AL - Aluminum
- LN - Brass or Nickel-plated brass

 Insulating materials

- PC+ABS - Halogen Free Polycarbonate + ABS
- PVC - Polyvinyl Chloride
- PP - Halogen Free Polypropylene
- PA6 - Halogen Free Polyamide 6
- PA12 - Halogen Free Polyamide 12
- PU - Polyurethane
- PE - Polyethylene
- NBR - NBR rubber
- PET - Thermoplastic Polyester
- TPV - Thermoplastic

