

# Variable Clip ( Ref: 55024012 )

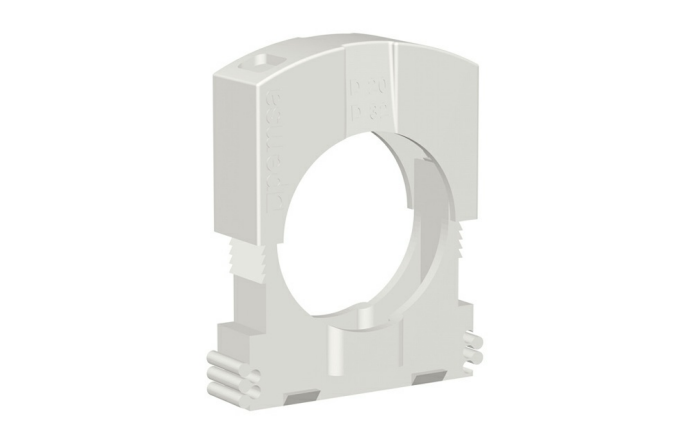

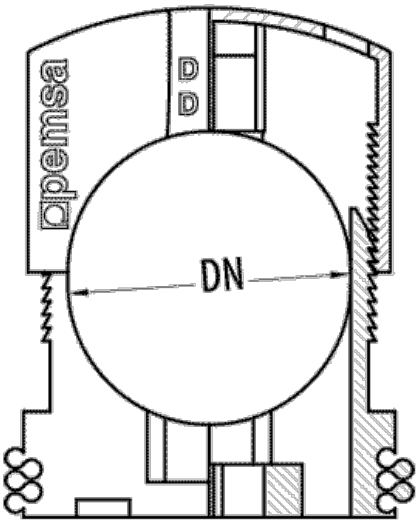


## Description

Halogen-free polyamide 6 pressure clip in grey color (RAL 7035) for rigid and flexible halogen free and PVC conduits. Accessory for the assembly of the tube by means of a safety lock. Available in different sizes.

## Advantages

Suitable for the fixing of rigid and corrugated conduits.

CE conformity to the 2014/35 directive and the EN IEC 61386 standard.

It has a lateral connection system with another clip that allows for the parallel assembly of the conduits.

Manufactured in polyamide 6. Self-extinguishing, halogen-free according to UNE/EN 60754-2 y UNE/EN 60754-1 and flame-retardant.

Fastening system with safety lock adaptable to various diameters of conduit.

## Applications

Suitable for fixing RLH, CLH, RPVC and CPVC rigid and corrugated conduits for the protection of electric cables in building, tertiary and industrial applications.

## Solutions



Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."

# Variable Clip ( Ref: 55024012 )

## Product data

| | |
|---|---|
| **ETIM 10** | EC002320 |
| **Huella de CO2. GWP A1-A3 (kg CO2 eq.)** | |
| **Colour** | Grey RAL 7035 |
| **Cable diameter range** | 12 / 20 |
| **kg/u** | 0,006 |
| **u** | 50 |

| | |
|---|---|
| **Material** | Polyamide 6 |
| **Working temperature range (°C)** | -15 / 90 °C |
| **Fire resistance** | LIBRE DE HALÓGENOS,NO PROPAGADOR DE LA LLAMA |

## Ⓢ Protection System

**CU** - Copper electroplated

**PG** - Pregalvanised

**EZ** - Electrogalvanised

**BC** - Electrogalvanised Bichromate

**BK8** - High Resistance Coating

**GC** - Hot Dip Galvanising

**INOX** - Stainless Steel

**PT** - Polyester Paint

**AL** - Aluminum

**LN** - Brass or Nickel-plated brass

## Ⓜ Insulating materials

**PC+ABS** - Halogen Free Polycarbonate + ABS

**PVC** - Polyvinyl Chloride

**PP** - Halogen Free Polypropylene

**PA6** - Halogen Free Polyamide 6

**PA12** - Halogen Free Polyamide 12

**PU** - Polyurethane

**PE** - Polyethylene

**NBR** - NBR rubber

**PET** - Thermoplastic Polyester

**TPV** - Thermoplastic



Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."