


Bride Pour Rail Rapide

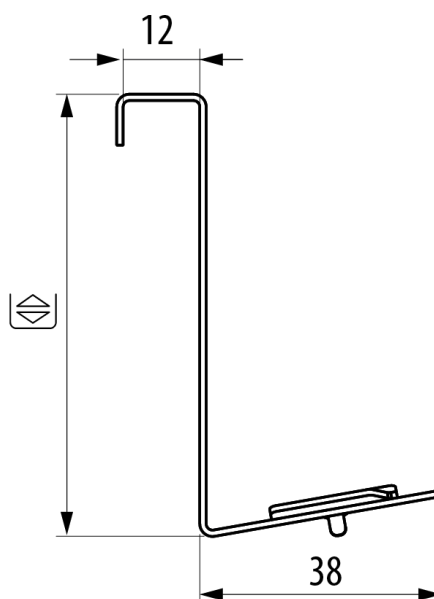

Description

Fast hold down clamp for fixing cable ladder and cable trays to 41x21 and 41x41 channel and cantilever arms in both ceiling and wall installations. It facilitates the connection to the strut without additional screws thanks to the lower twist and lock part.

Advantages

Quick connection without screws to channel and strut in only two steps.

No screws or other fasteners required. 50% savings on installation costs.

Wide range. Available in heights of 35, 60, 85, 100, 120 and 150mm.

In accordance with CE standard with respect to directive 2014/35 / EU.

GC protection system (standard UNE-EN ISO 1461), suitable for outdoor installations and in aggressive environments. Corrosion resistance class 8 according to IEC 61537.

Applications

Used for the connection of Pemsaband cable trays and Megaband® One cable ladders to 41x21 and 41x41 channel for installations of the ladder from the ceiling or to the wall in the management and distribution of cables in electrical and telecommunications installations in public buildings, infrastructures and civil works, industrial facilities, tertiary sector etc.

Solutions



www.pemsa-rejiband.com



Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."

Bride Pour Rail Rapide

Main technical characteristics

| | | | | | | |
|---------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------|
|  GC |  Zinc Nickel |  Class 8 |  35, 60, 100, 120, 150 |  10 |  Steel with surface coating |  -50 / 150 °C |
|  A1 No combustible | ETIM EC001005 | | | | | |

Product data

|  | Ref | kg/u |
|-----------------------------------------------------------------------------------|----------|-------|
| 35 | 81000253 | 0.021 |
| 60 | 81000254 | 0.025 |
| 100 | 81000256 | 0.032 |
| 120 | 81000257 | 0.036 |
| 150 | 81000258 | 0.041 |

Protection System


- CU - Copper electroplated
- PG - Pregalvanised
- EZ - Electrogalvanised
- BC - Electrogalvanised Bichromate
- BK8 - High Resistance Coating
- GC - Hot Dip Galvanising
- INOX - Stainless Steel
- PT - Polyester Paint
- AL - Aluminum
- LN - Brass or Nickel-plated brass

Insulating materials

- PC+ABS - Halogen Free Polycarbonate + ABS
- PVC - Polyvinyl Chloride
- PP - Halogen Free Polypropylene
- PA6 - Halogen Free Polyamide 6
- PA12 - Halogen Free Polyamide 12
- PU - Polyurethane
- PE - Polyethylene
- NBR - NBR rubber
- PET - Thermoplastic Polyester
- TPV - Thermoplastic

Bride Pour Rail Rapide


Product applications

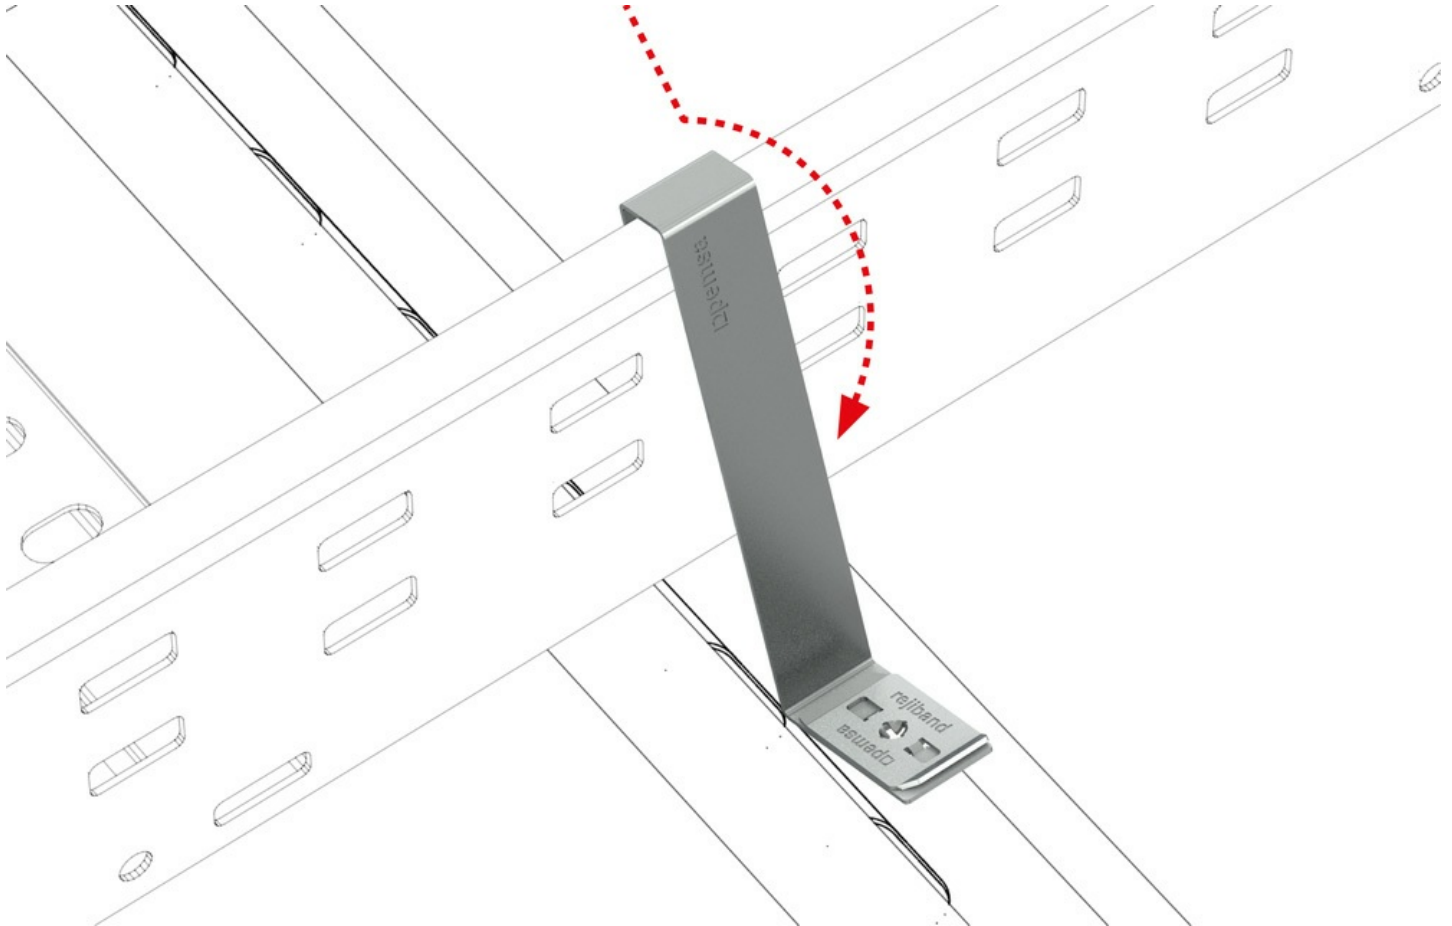


www.pemsa-rejiband.com

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."


Bride Pour Rail Rapide

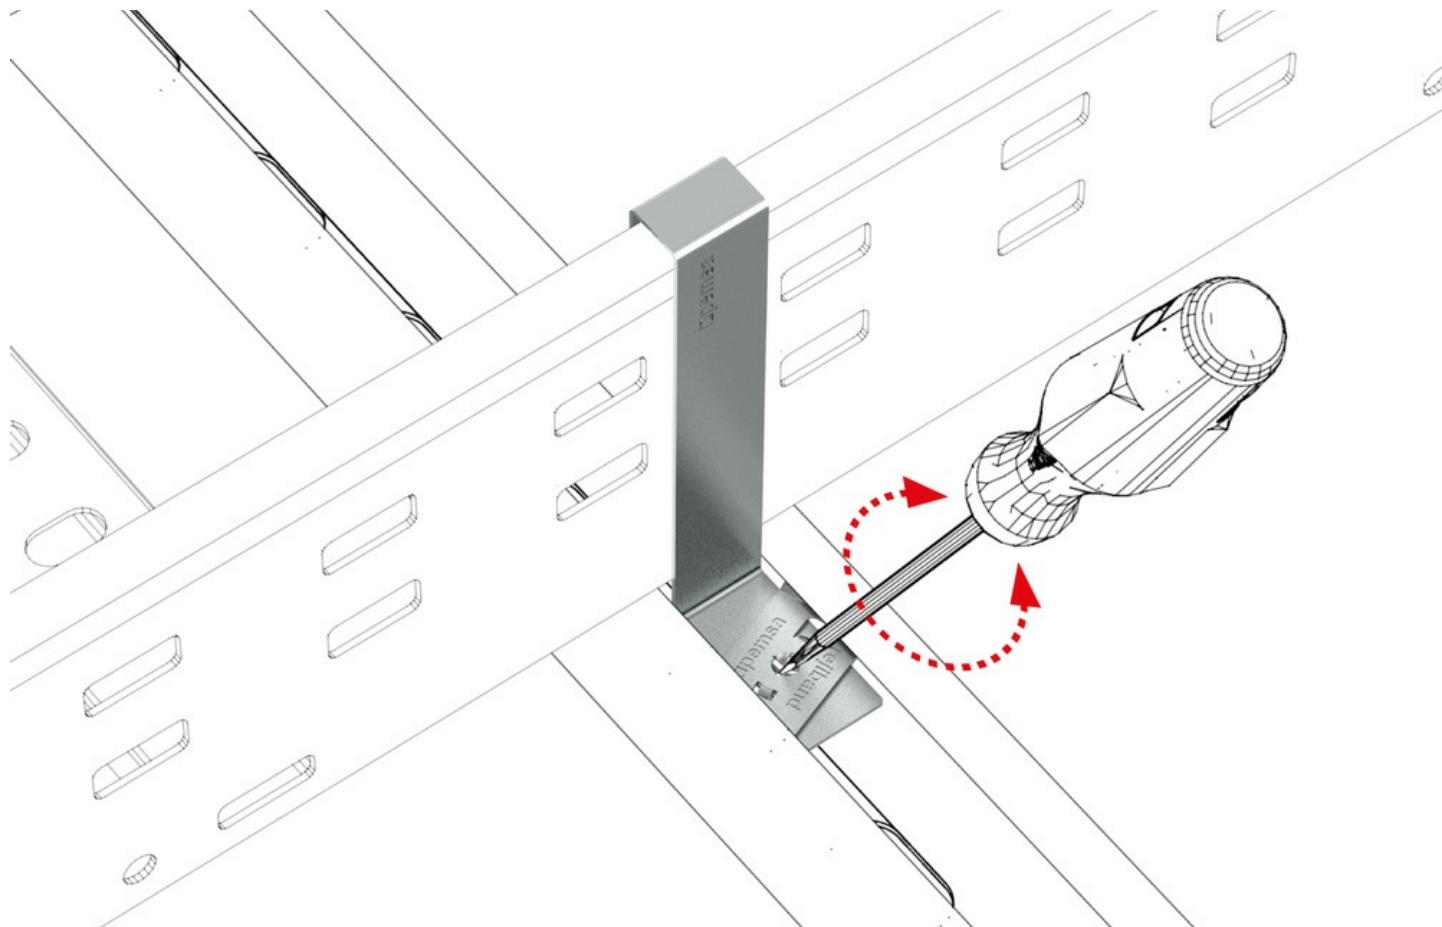

Bride Pour Rail Rapide

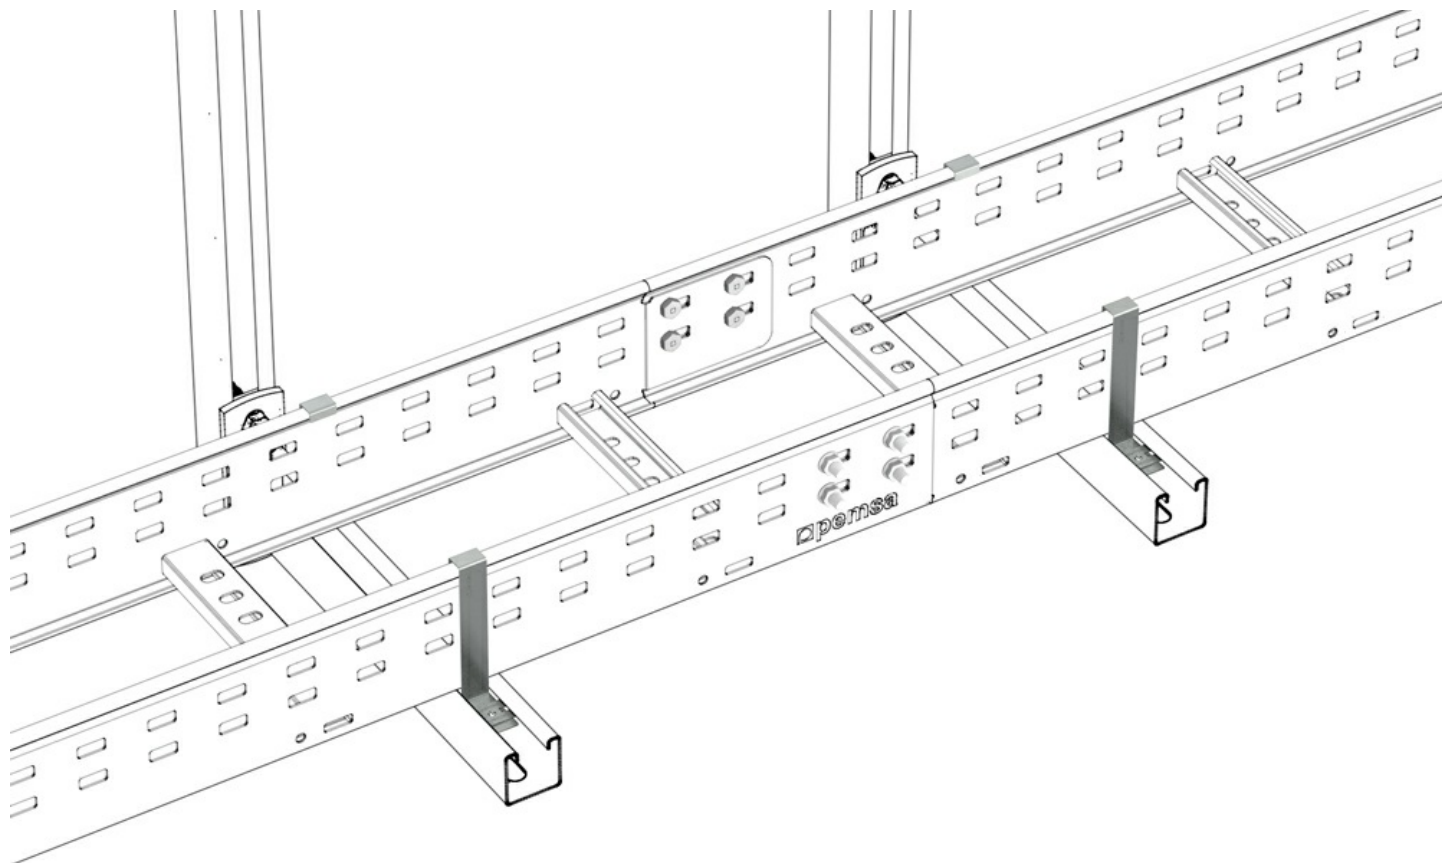

Bride Pour Rail Rapide

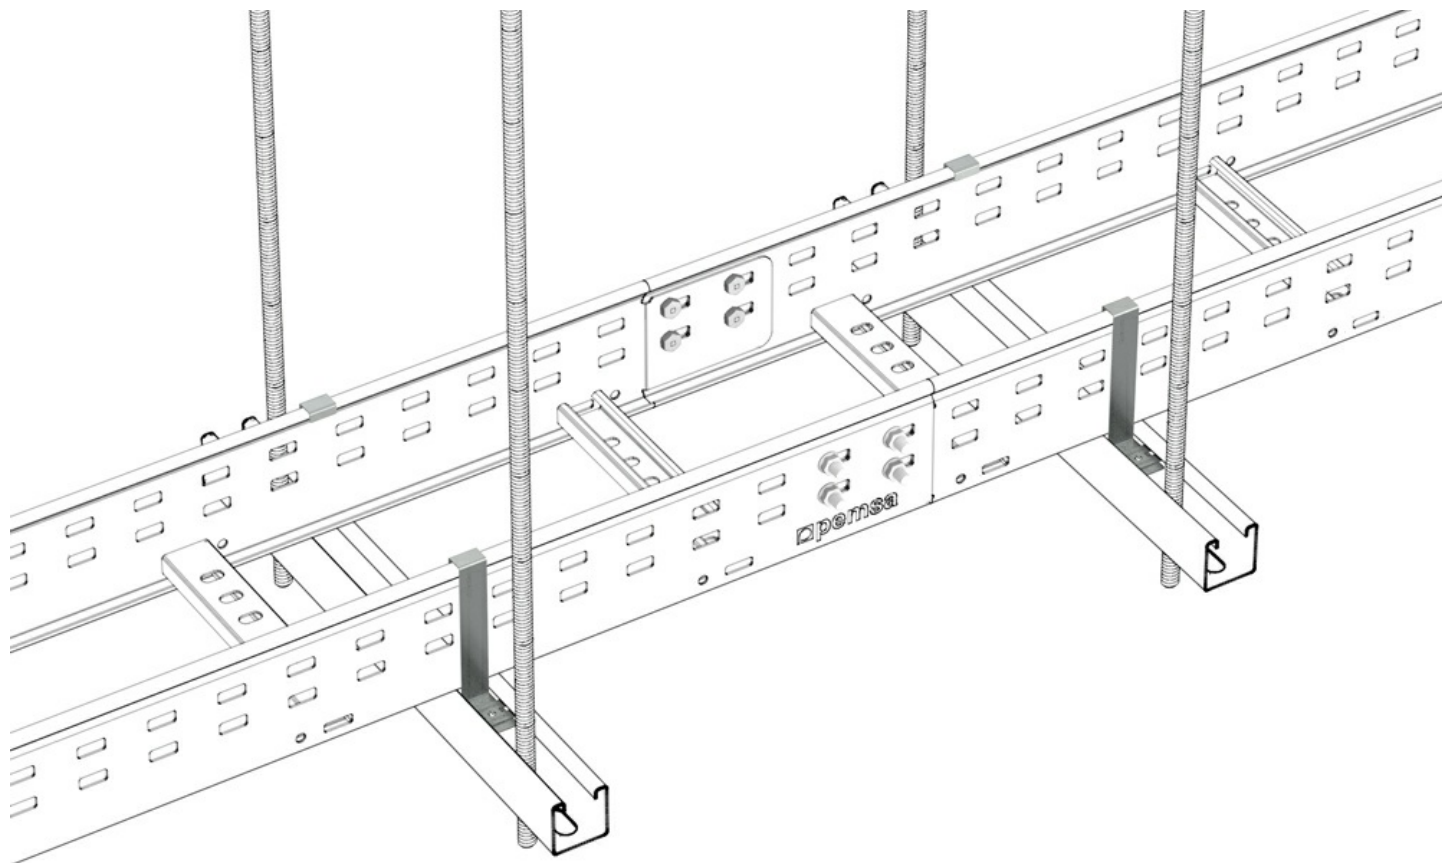

Bride Pour Rail Rapide

