


Bride Pour Rail Rapide (Ref: 81000258)

1/17

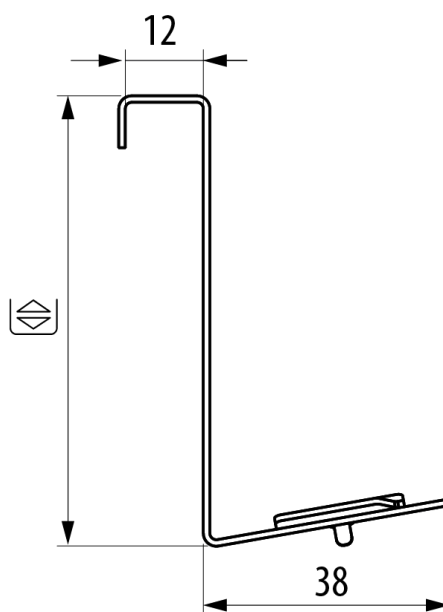

Description

Fast hold down clamp for fixing cable ladder and cable trays to 41x21 and 41x41 channel and cantilever arms in both ceiling and wall installations. Of 150 mm height, With GC protection system. It facilitates the connection to the strut without additional screws thanks to the lower twist and lock part

Advantages

No screws or other fasteners required. 50% savings on installation costs

Wide range. Available in heights of 35, 60, 85, 100, 120 and 150mm

In accordance with CE standard with respect to directive 2014/35 / EU

Quick connection without screws to channel and strut in only two steps

GC protection system (standard UNE-EN ISO 1461), suitable for outdoor installations and in aggressive environments. Corrosion resistance class 8 according to IEC 61537

Applications

Used for the connection of Pemsaband cable trays and Megaband® One cable ladders to 41x21 and 41x41 channel for installations of the ladder from the ceiling or to the wall in the management and distribution of cables in electrical and telecommunications installations in public buildings, infrastructures and civil works, industrial facilities, tertiary sector etc.

Solutions



www.pemsa-rejiband.com

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."



Product data			
ETIM 10		EC001005	
Huella de CO2. GWP A1-A3 (kg CO2 eq.)		0,107	
Protection System		GC	
Finish		Zinc Nickel	
Resistance Class		Class 8	
Flange (mm)		150	
kg/u		0,041	
u		10	
Material		Steel with surface coating	
Working temperature range (°C)		-50 / 150 °C	
Fire resistance		A1 No combustible	


🔒 Protection System
CU - Copper electroplated
PG - Pregalvanised
EZ - Electrogalvanised
BC - Electrogalvanised Bichromate
BK8 - High Resistance Coating
GC - Hot Dip Galvanising
INOX - Stainless Steel
PT - Polyester Paint
AL - Aluminum
LN - Brass or Nickel-plated brass

🧊 Insulating materials
PC+ABS - Halogen Free Polycarbonate + ABS
PVC - Polyvinyl Chloride
PP - Halogen Free Polypropylene
PA6 - Halogen Free Polyamide 6
PA12 - Halogen Free Polyamide 12
PU - Polyurethane
PE - Polyethylene
NBR - NBR rubber
PET - Thermoplastic Polyester
TPV - Thermoplastic

Bride Pour Rail Rapide (Ref: 81000258)

3/17

Product applications

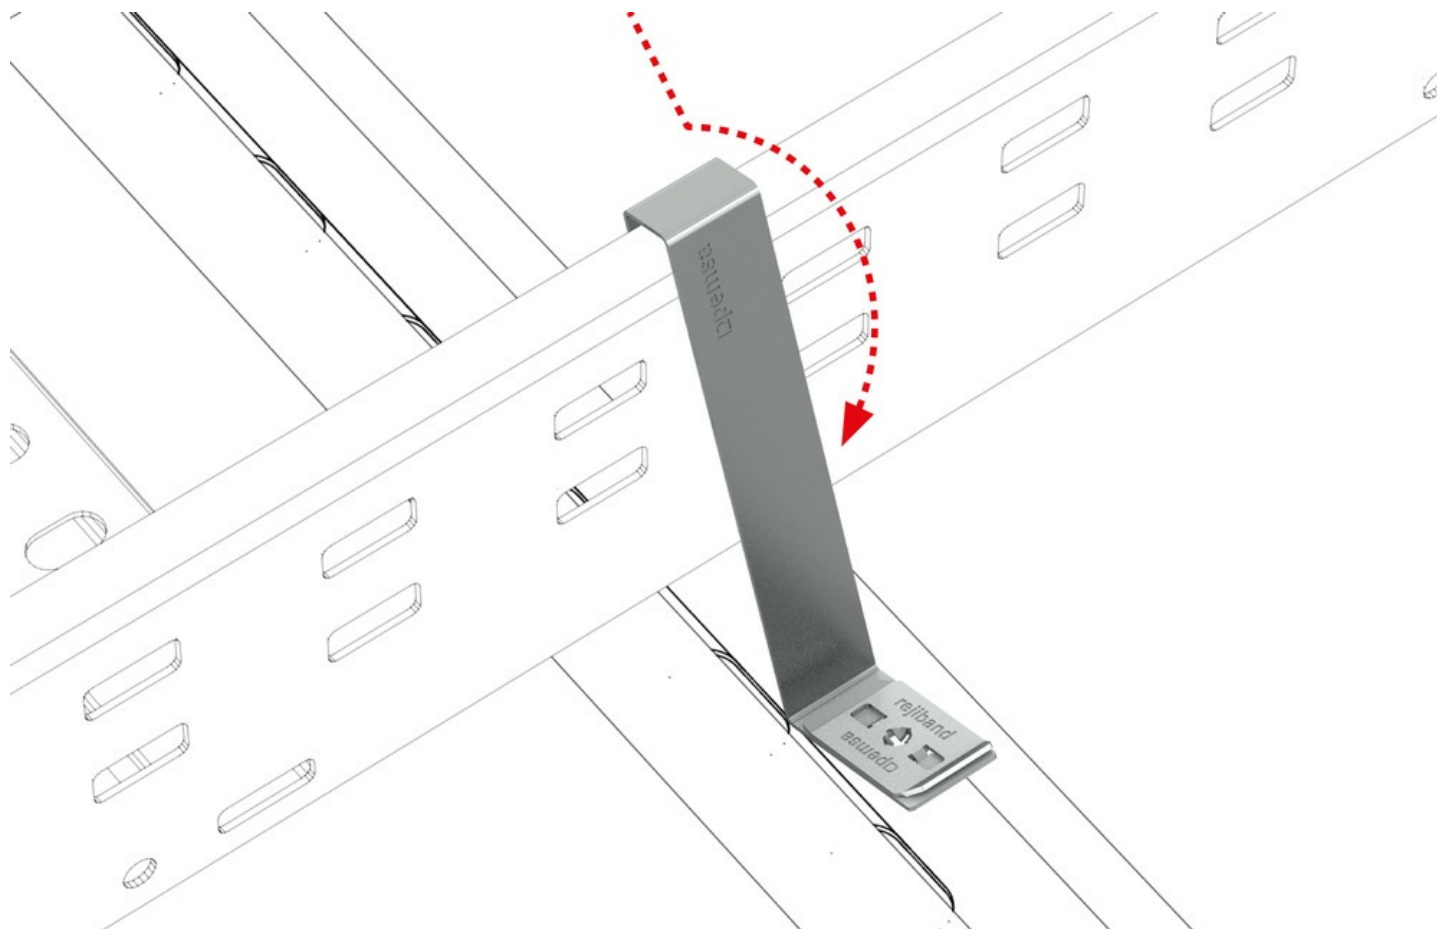


www.pemsa-rejiband.com

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."

Bride Pour Rail Rapide (Ref: 81000258)

4/17

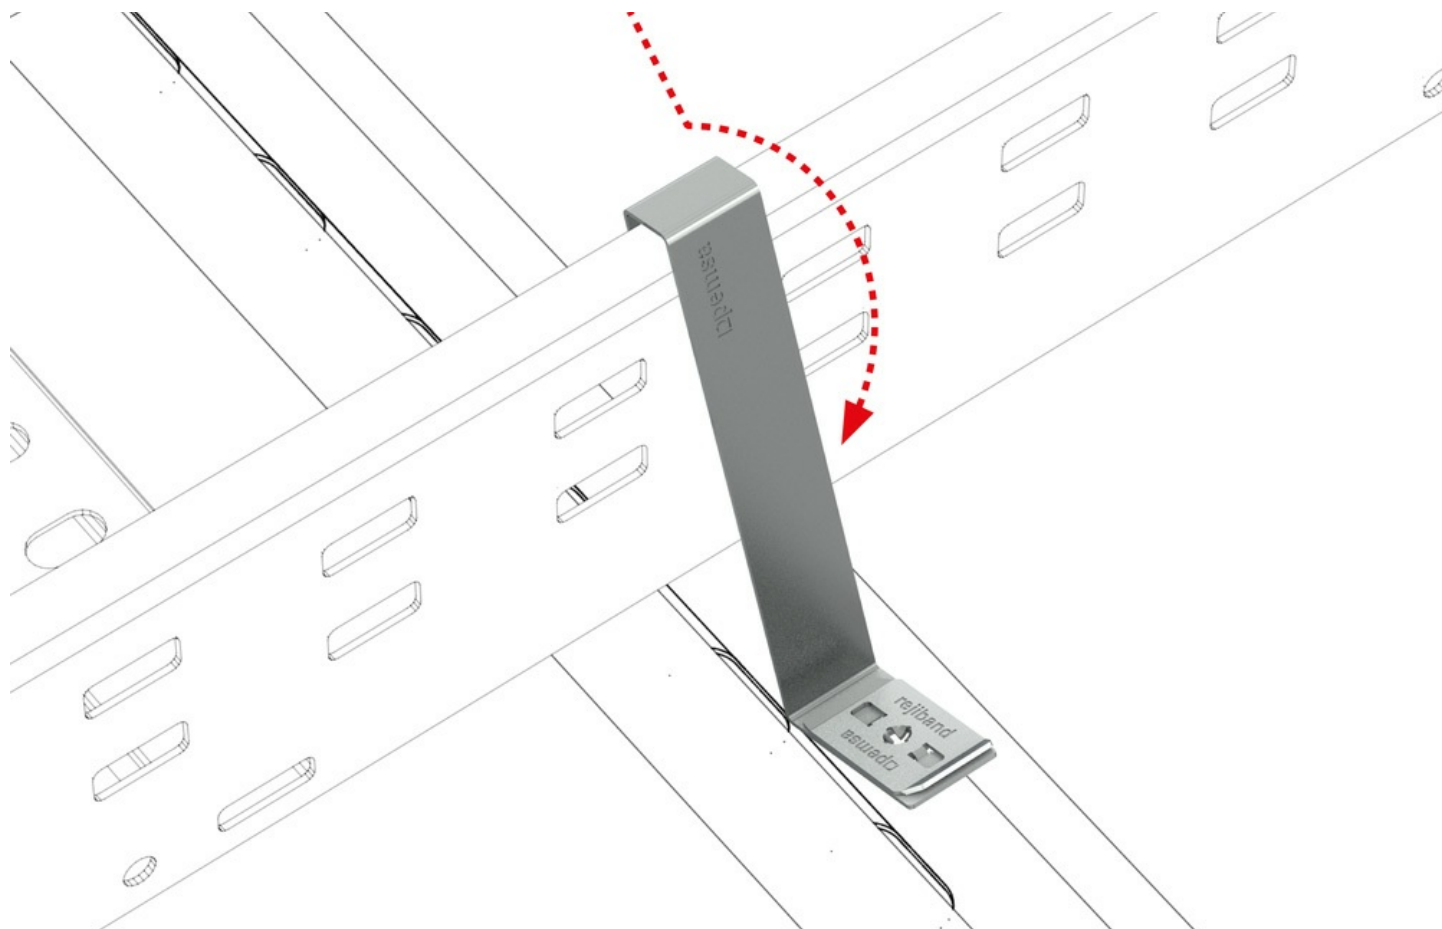


www.pemsa-reijband.com

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Reijband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."

Bride Pour Rail Rapide (Ref: 81000258)

5/17

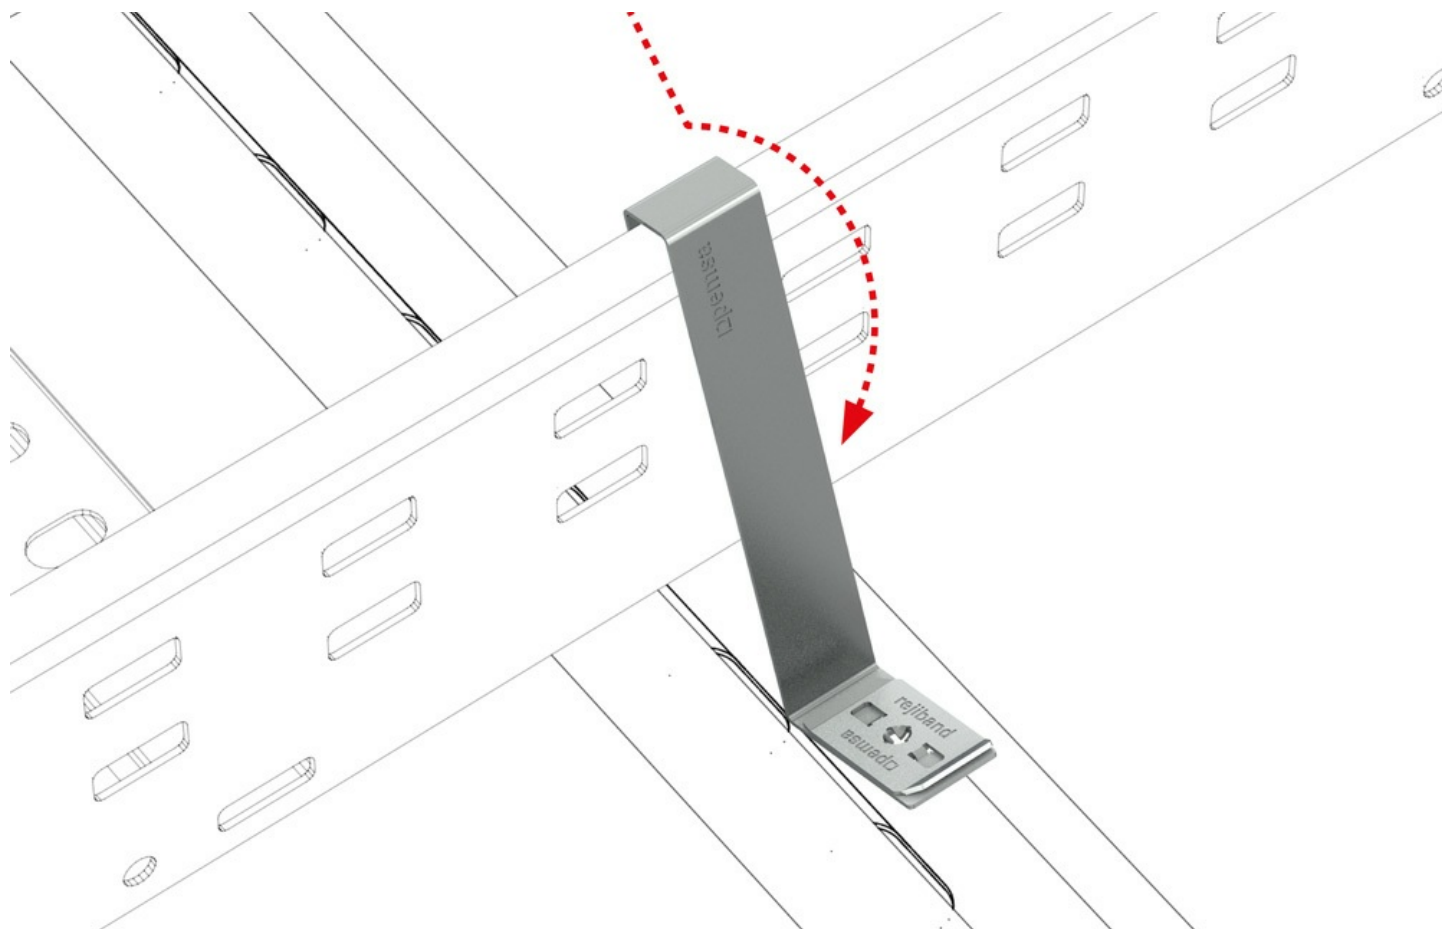


www.pemsa-reijband.com

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Reijband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."


Bride Pour Rail Rapide (Ref: 81000258)

6/17

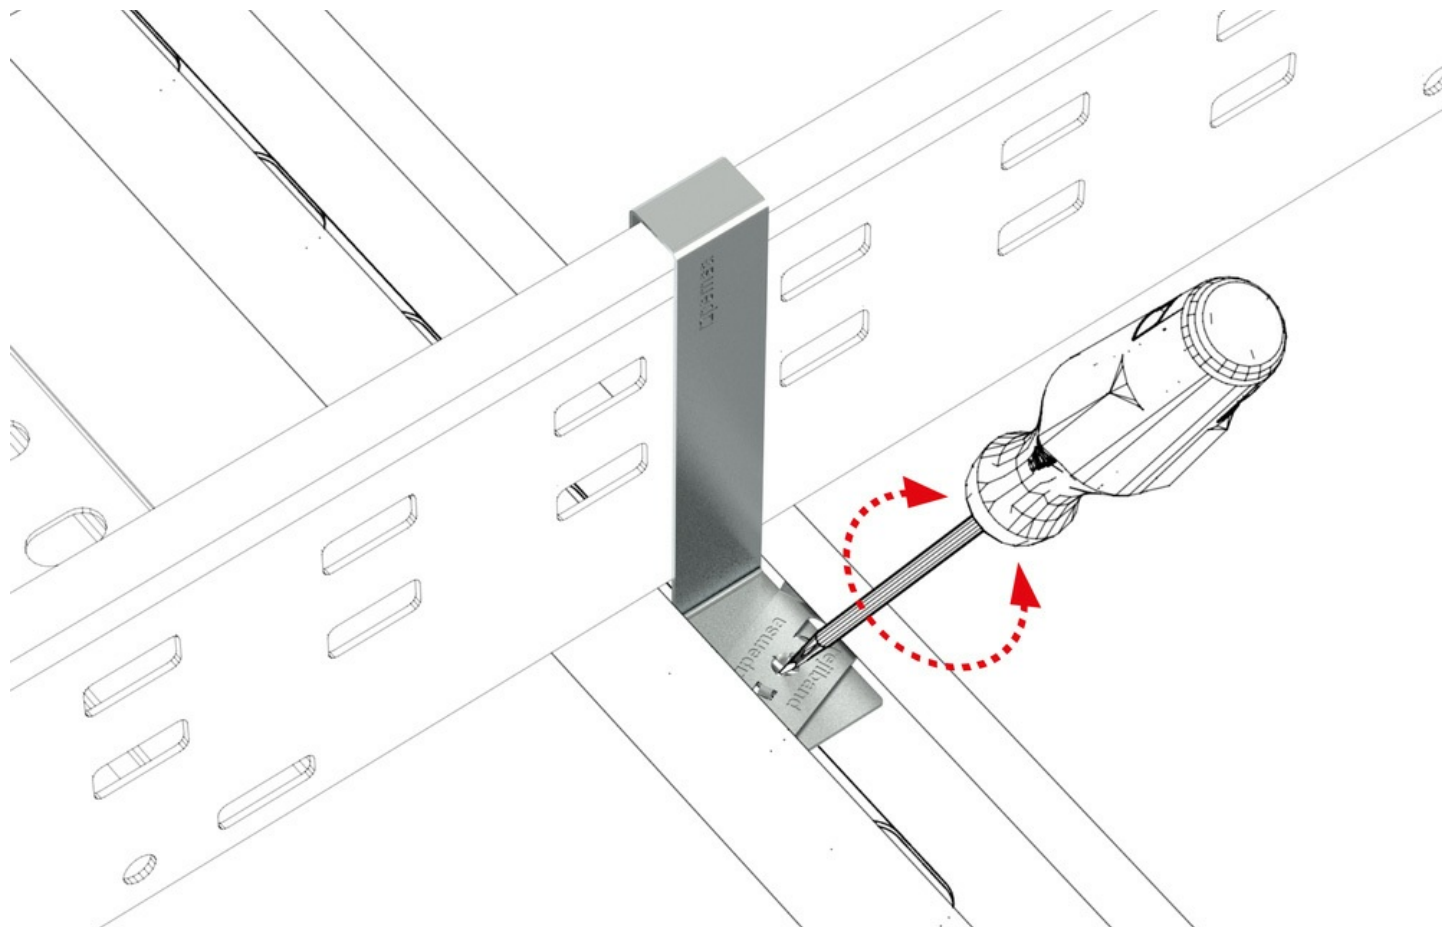


Bride Pour Rail Rapide (Ref: 81000258)

7/17

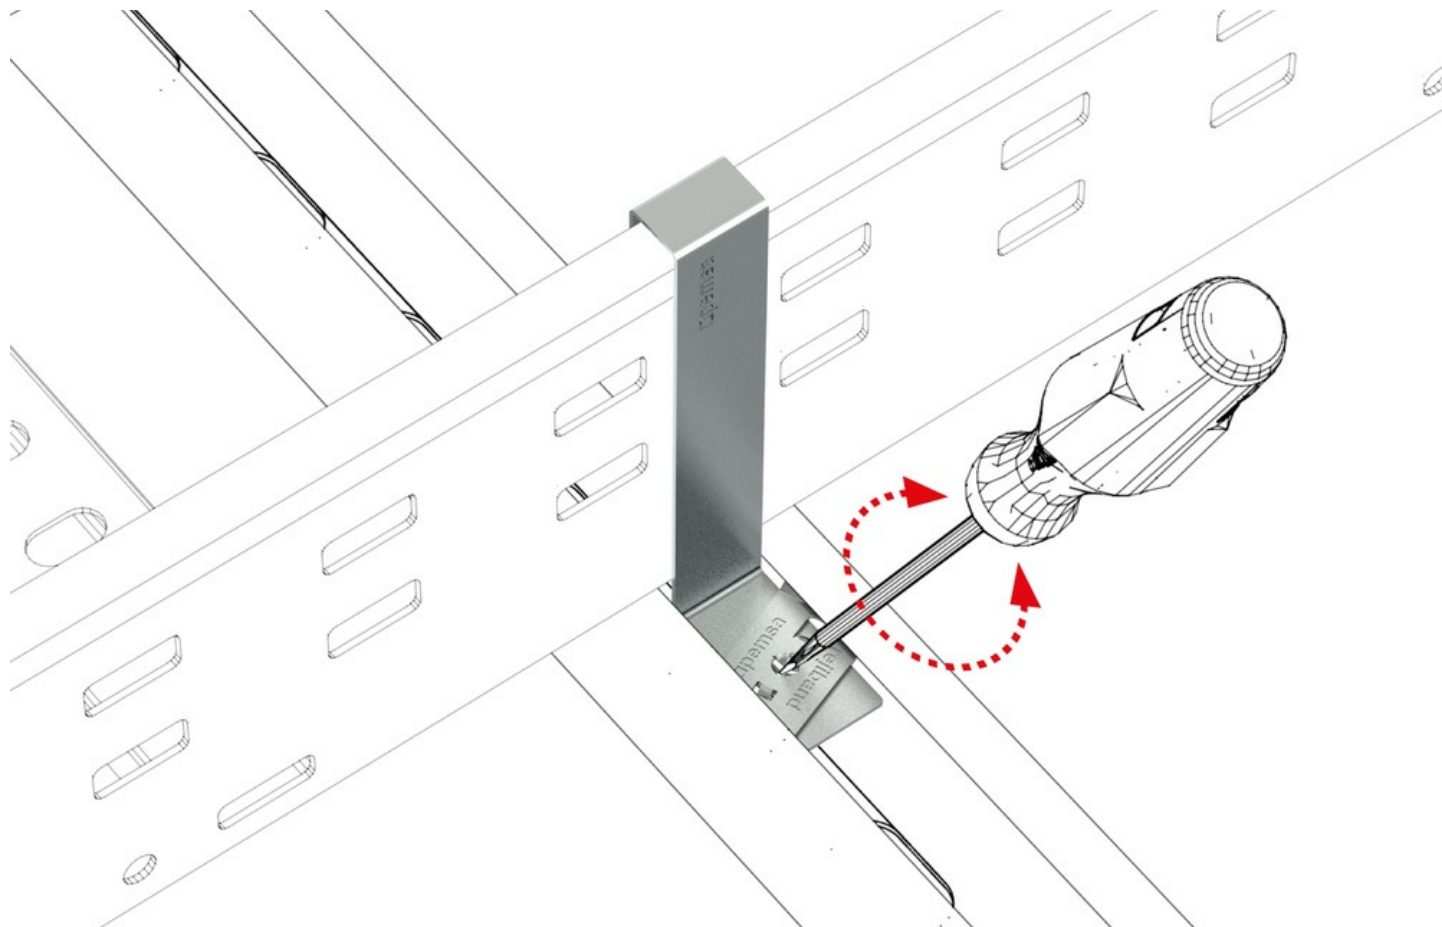


Bride Pour Rail Rapide (Ref: 81000258)

8/17

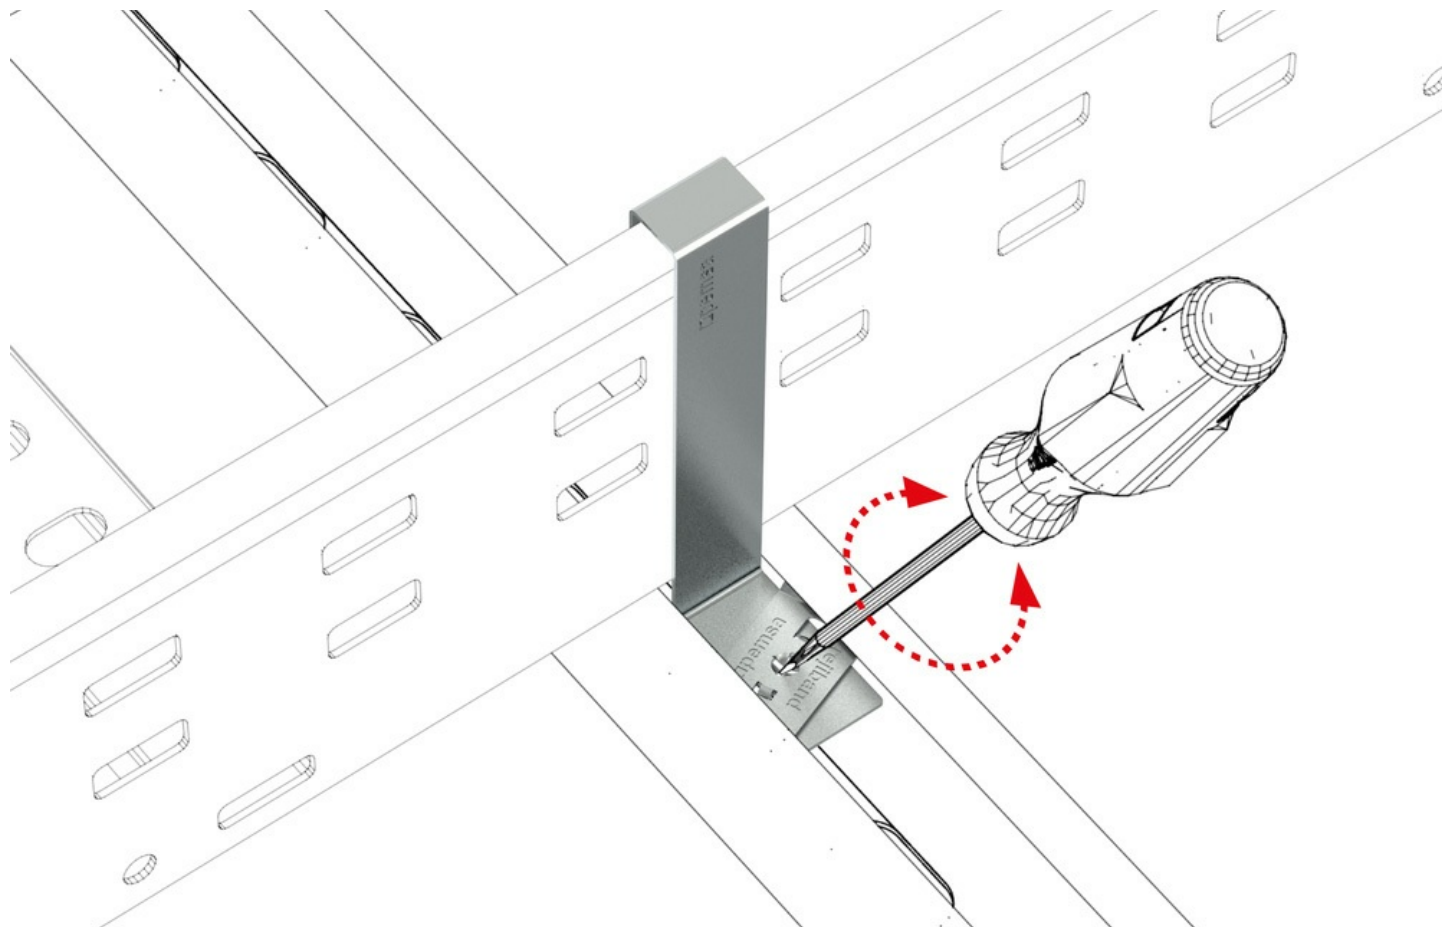


Bride Pour Rail Rapide (Ref: 81000258)

9/17

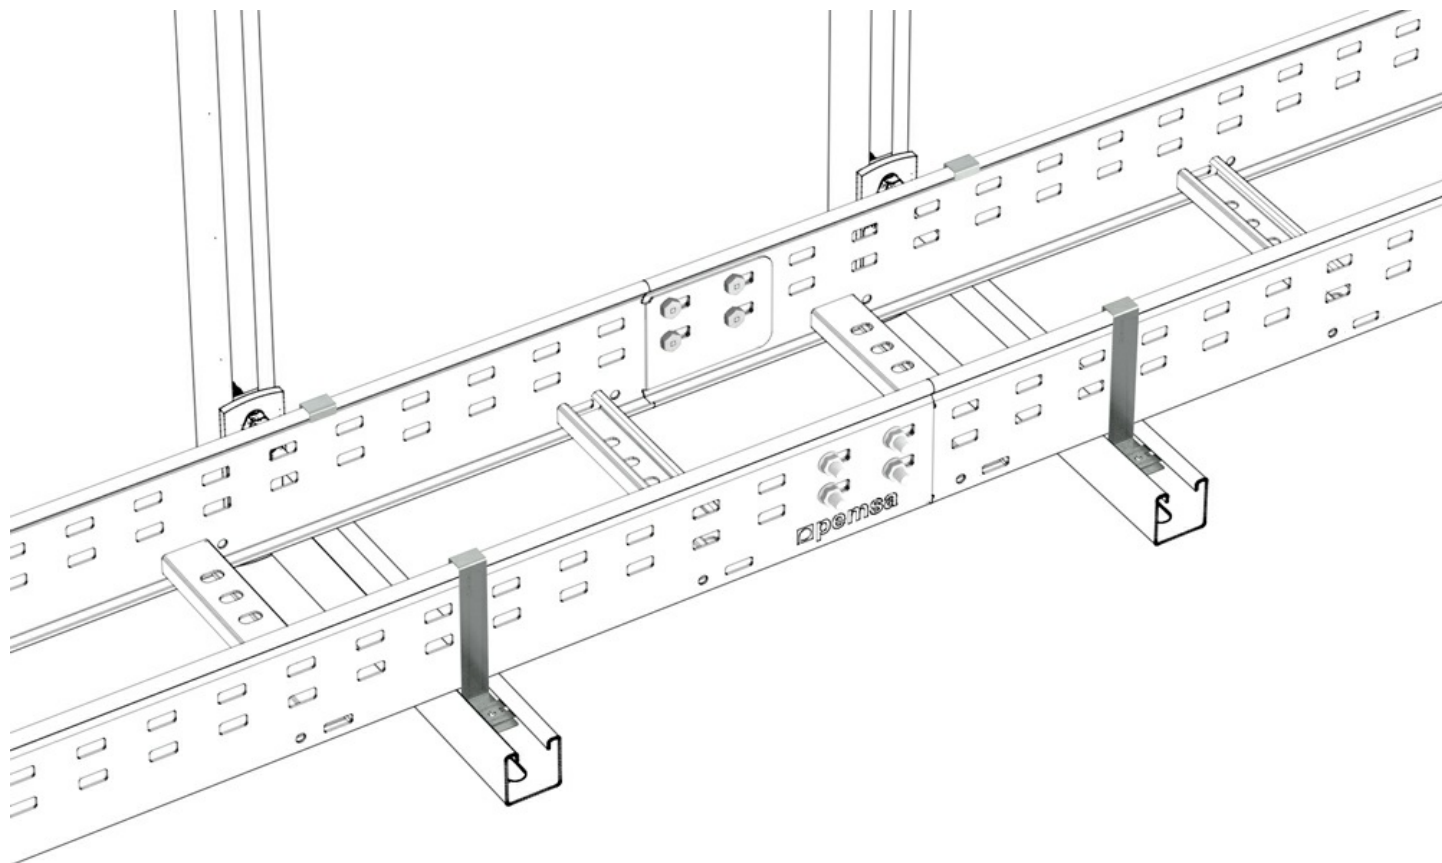


Bride Pour Rail Rapide (Ref: 81000258)

10/17

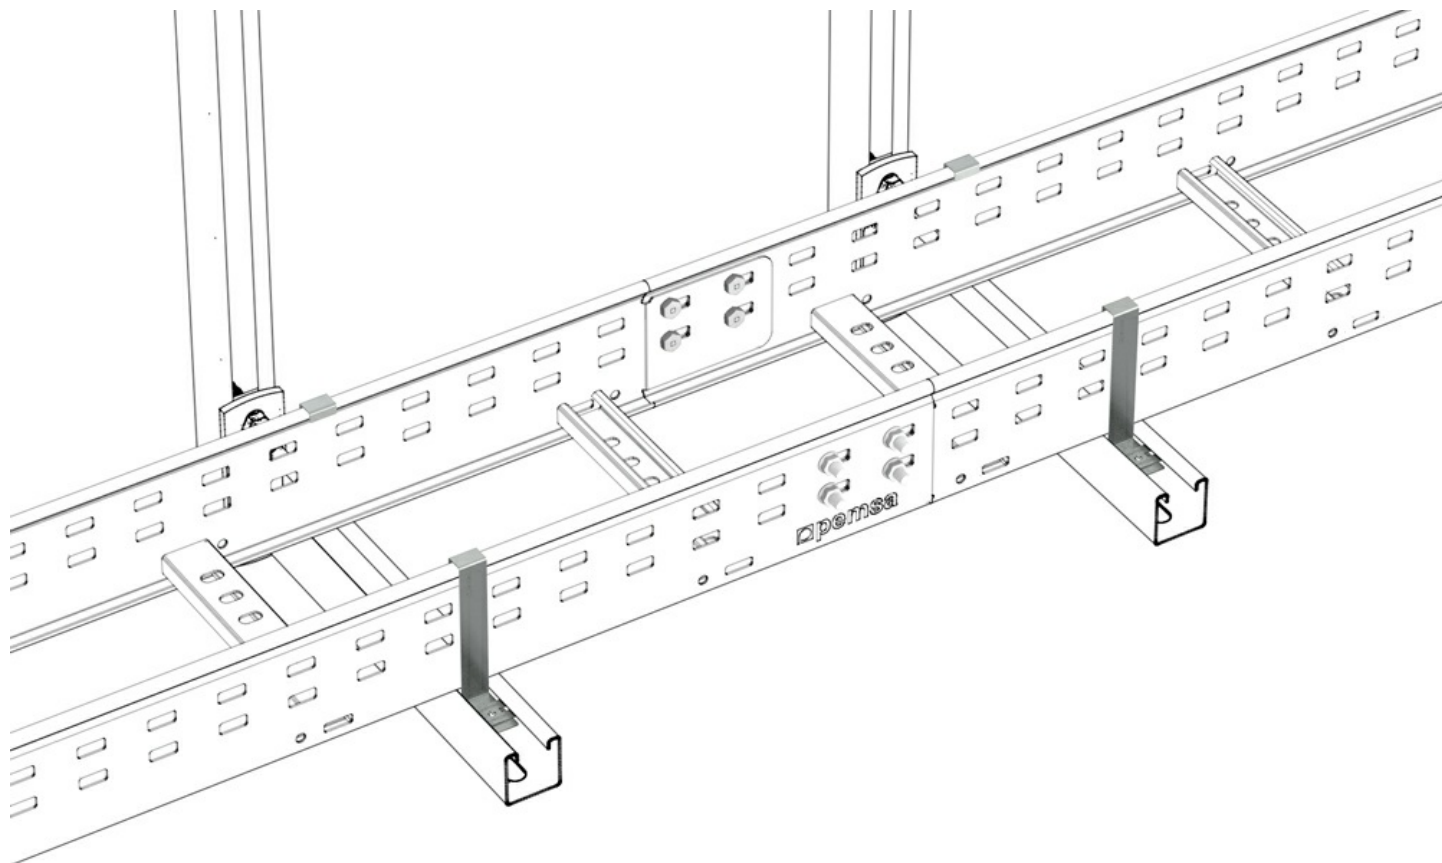

Bride Pour Rail Rapide (Ref: 81000258)

11/17

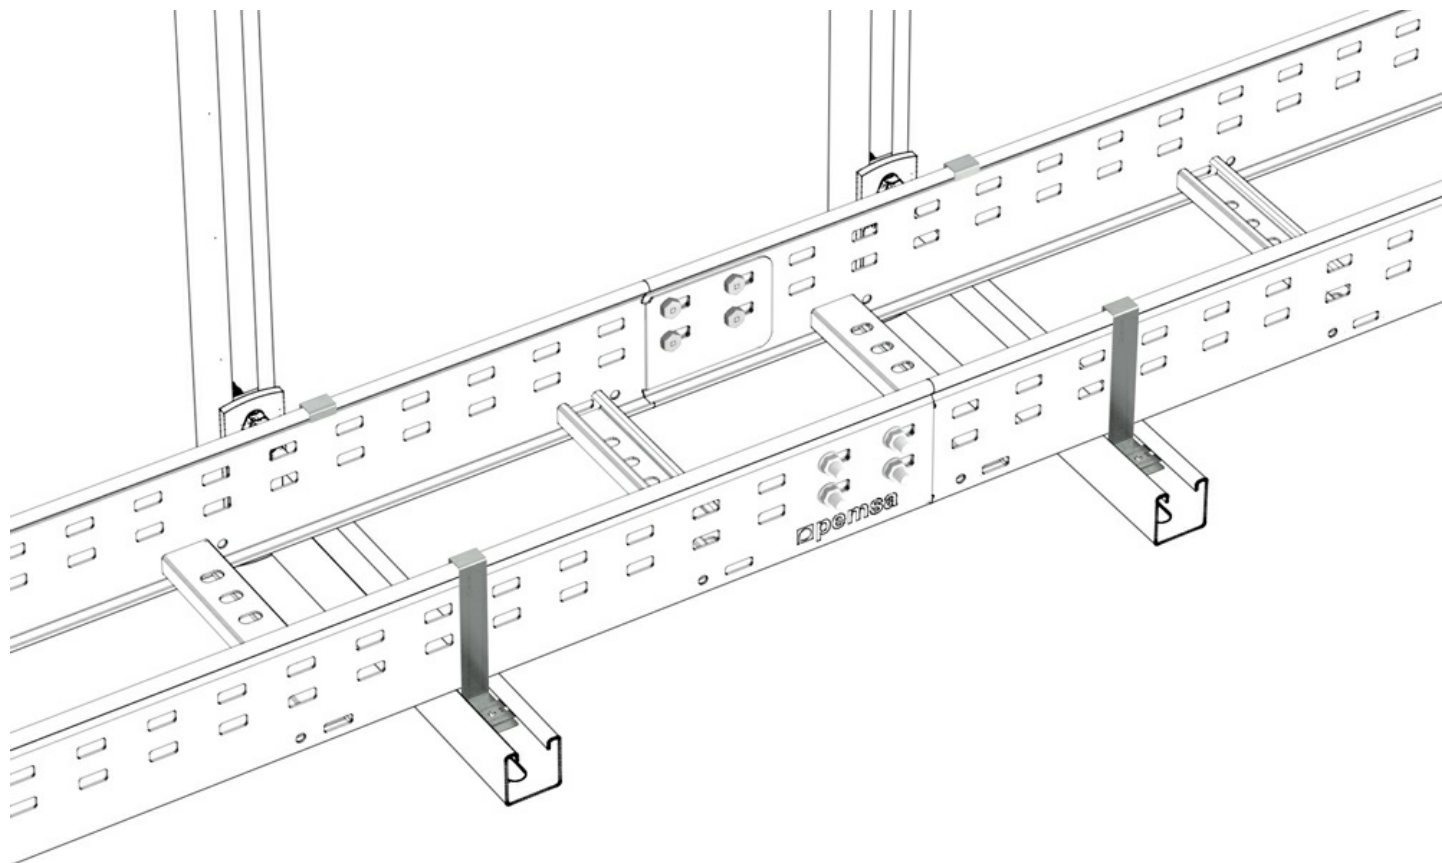


www.pemsa-rejiband.com

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."


Bride Pour Rail Rapide (Ref: 81000258)

12/17

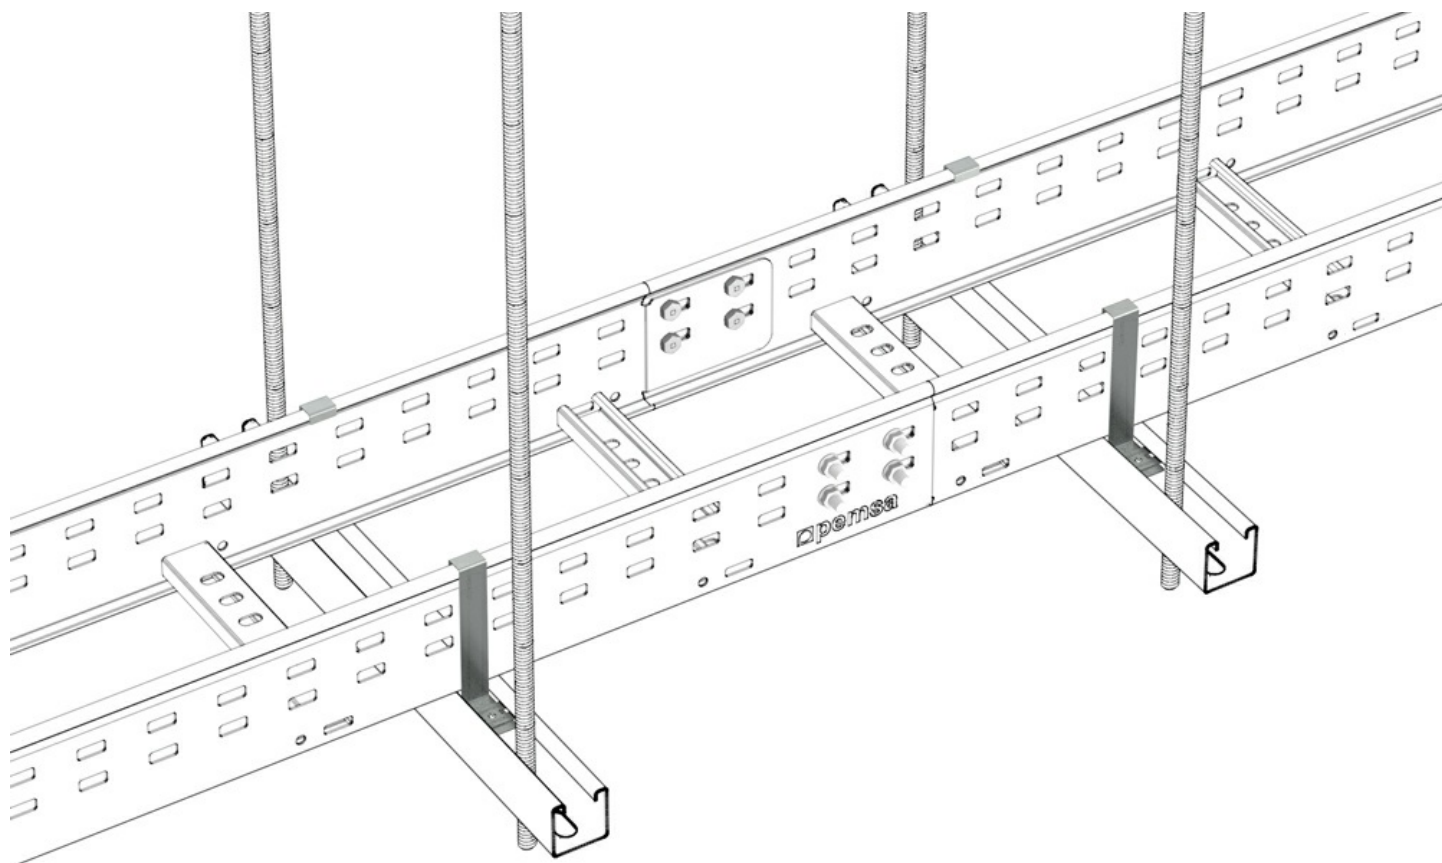


Bride Pour Rail Rapide (Ref: 81000258)

13/17

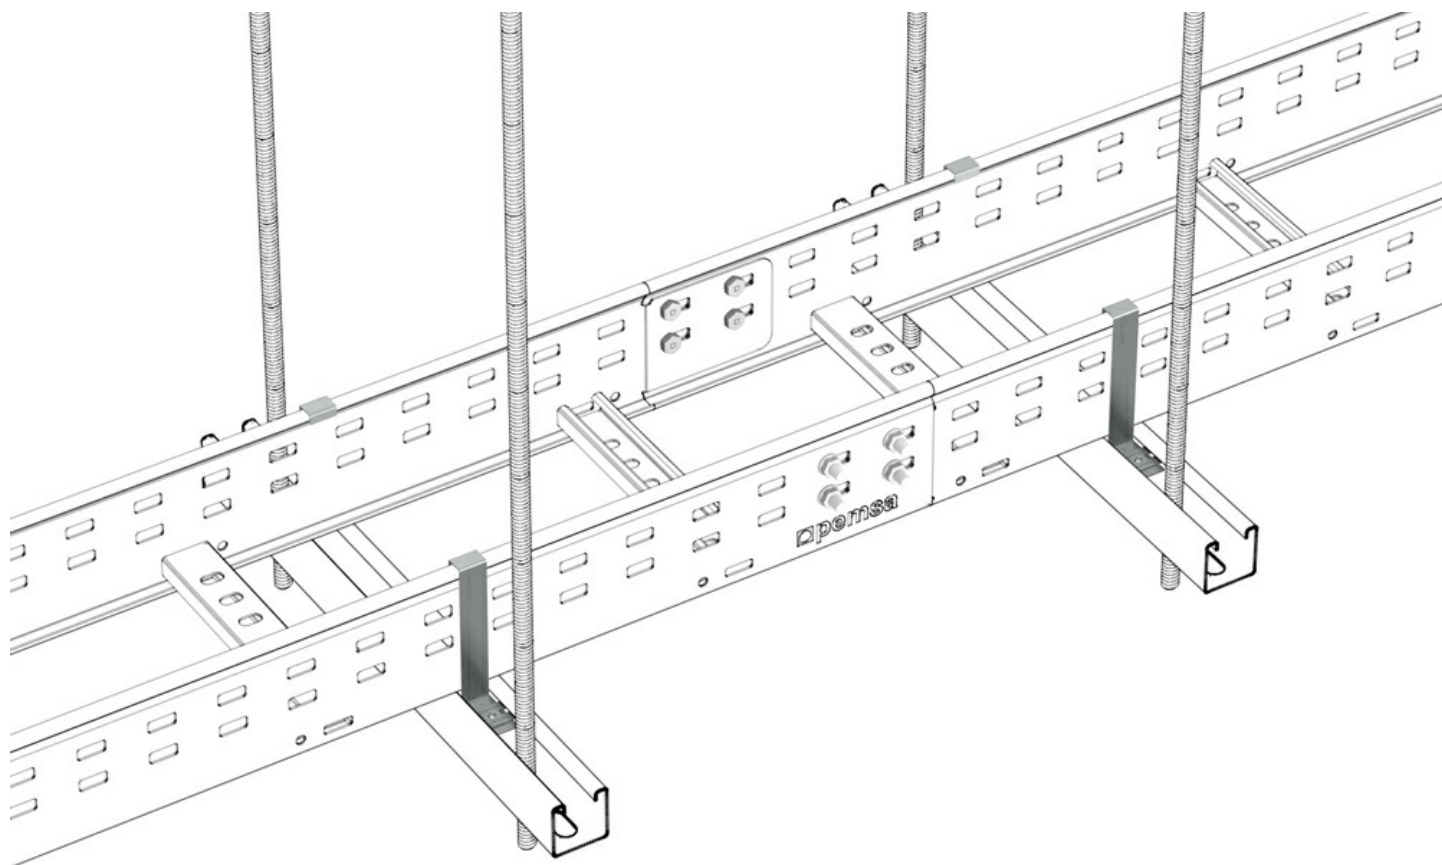

Bride Pour Rail Rapide (Ref: 81000258)

14/17

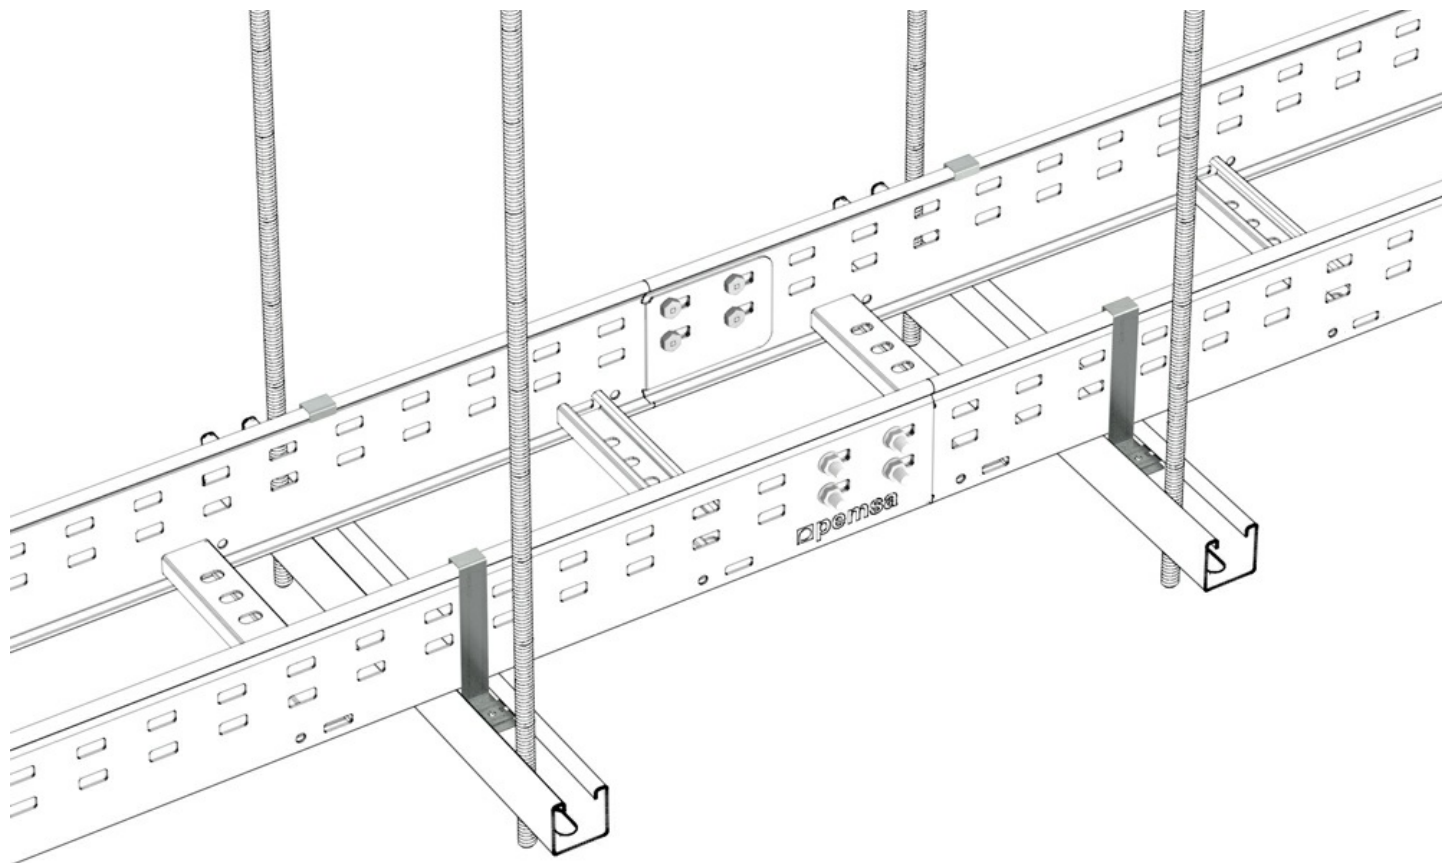


www.pemsa-rejiband.com

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."


Bride Pour Rail Rapide (Ref: 81000258)

15/17

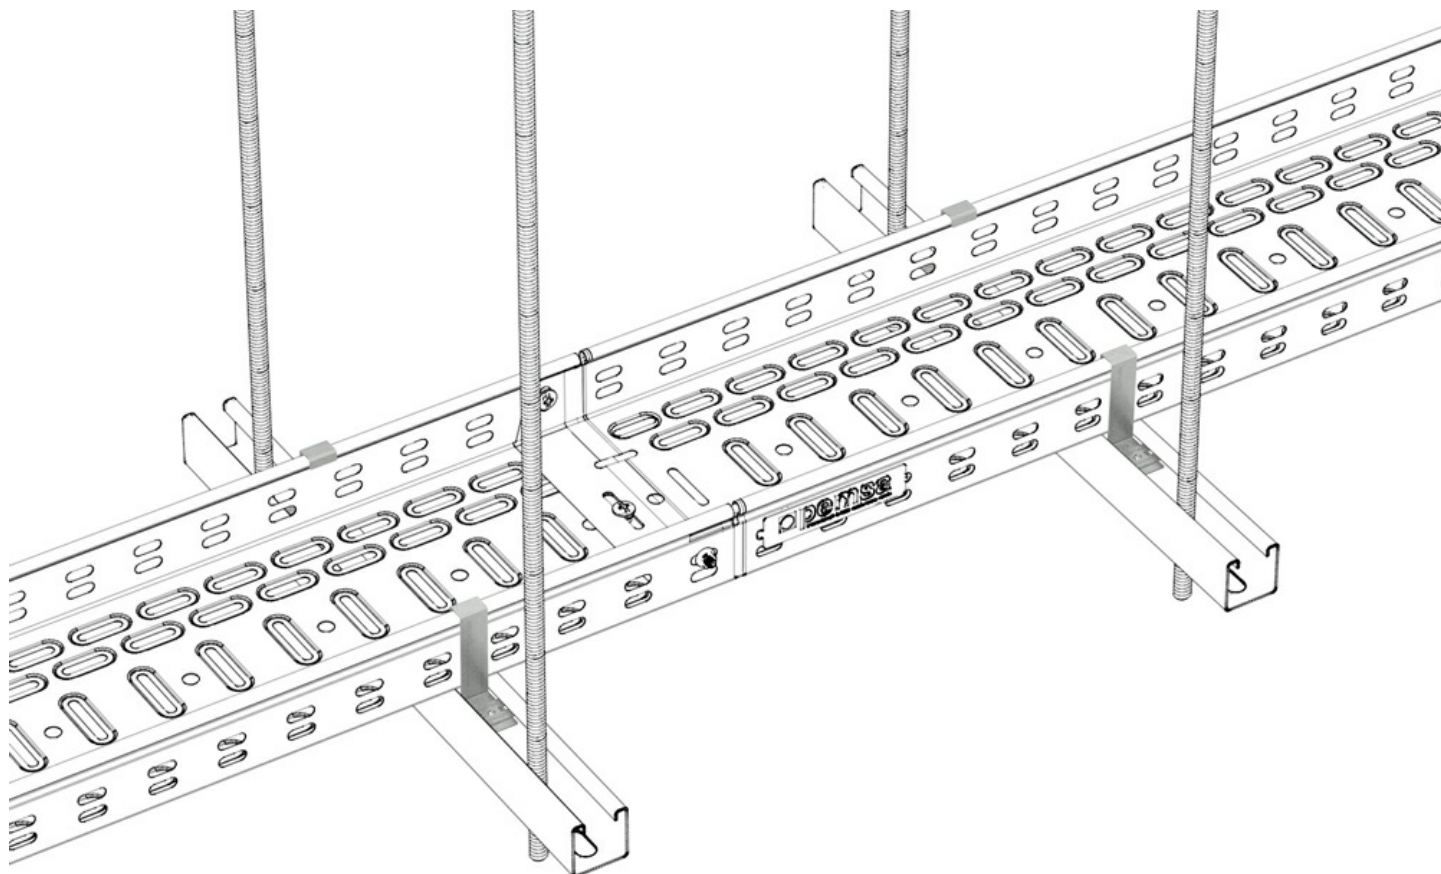

Bride Pour Rail Rapide (Ref: 81000258)

16/17

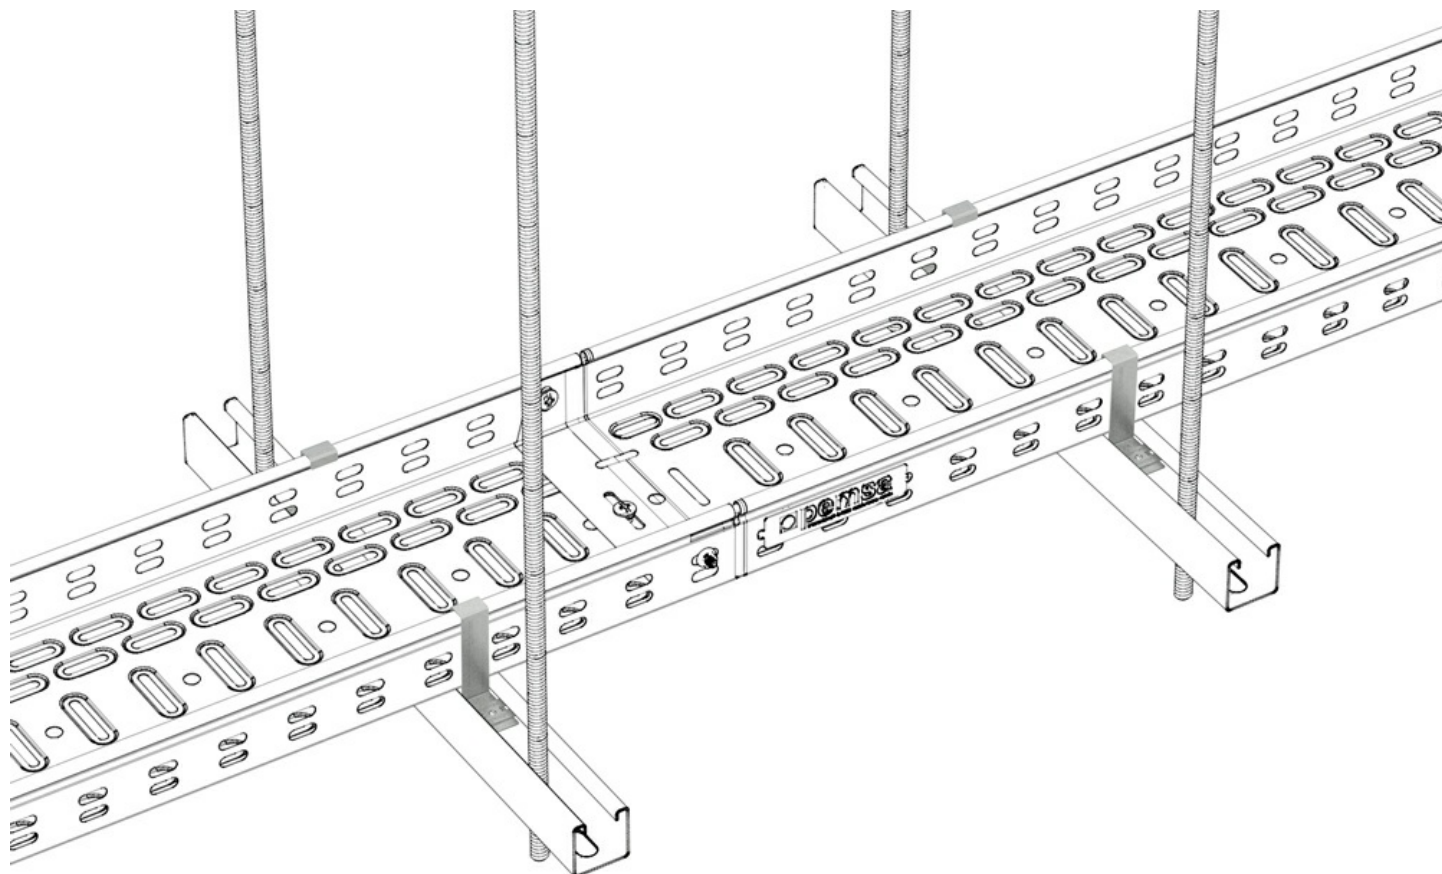

Bride Pour Rail Rapide (Ref: 81000258)

17/17

