


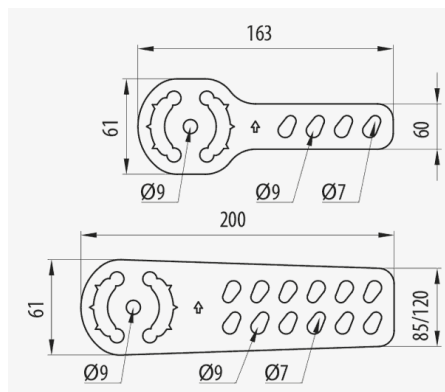

Description

Metal part for the creation of adjustable angle level changes with Megaband® ladder and Pemsaband® cable tray , by using m8 bolts and hexagonal nuts whilst also maintaining the electrical continuity, according to IEC 61537. Of 60 mm height, With EZ protection system, EZ3 finish

Advantages

Available in various protection systems: EZ, GC and stainless steel AISI 304 and AISI 316L.

Electrical continuity guaranteed according to standard IEC61537.

Thanks to the articulation it allows the creation of level changes.

Also compatible with Pemsaband® One perforated and solid sheet trays.

Requires M8 hexagonal bolts and nuts.

Applications

The Megaband® ladder is designed to be able to make level changes of cable management in electrical and telecommunications installations in public buildings, infrastructures and civil works, tertiary sector and industrial applications. Compatibility with the Pemsaband® One perforated and solid ranges.

Solutions



Product data			
ETIM 10	EC002413	u	8
Huella de CO2. GWP A1-A3 (kg CO2 eq.)	0,147	Material	Steel with surface coating
Protection System	EZ	Working temperature range (°C)	-50 / 150 °C
Finish	EZ3, Electrogalvanised	Fire resistance	A1 No combustible
Resistance Class	Class 3		
Flange (mm)	60		
kg/u	0,058		

🔒 Protection System
CU - Copper electroplated
PG - Pregalvanised
EZ - Electrogalvanised
BC - Electrogalvanised Bichromate
BK8 - High Resistance Coating
GC - Hot Dip Galvanising
INOX - Stainless Steel
PT - Polyester Paint
AL - Aluminum
LN - Brass or Nickel-plated brass

🏠 Insulating materials
PC+ABS - Halogen Free Polycarbonate + ABS
PVC - Polyvinyl Chloride
PP - Halogen Free Polypropylene
PA6 - Halogen Free Polyamide 6
PA12 - Halogen Free Polyamide 12
PU - Polyurethane
PE - Polyethylene
NBR - NBR rubber
PET - Thermoplastic Polyester
TPV - Thermoplastic

Product applications

