


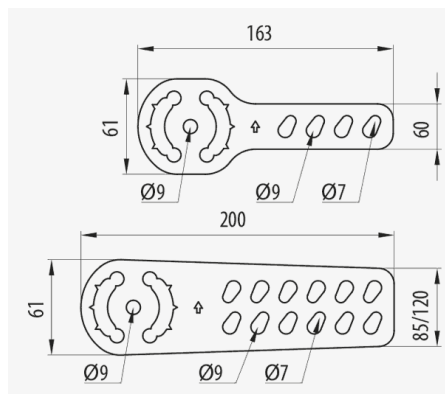

Description

Metal part for the creation of adjustable angle level changes with Megaband® ladder and Pemsaband® cable tray , by using m8 bolts and hexagonal nuts whilst also maintaining the electrical continuity, according to IEC 61537. Of 60 mm height, With GC protection system, HDG finish

Advantages

Available in various protection systems: EZ, GC and stainless steel AISI 304 and AISI 316L.

Electrical continuity guaranteed according to standard IEC61537.

Thanks to the articulation it allows the creation of level changes.

Also compatible with Pemsaband® One perforated and solid sheet trays.

Requires M8 hexagonal bolts and nuts.

Applications

The Megaband® ladder is designed to be able to make level changes of cable management in electrical and telecommunications installations in public buildings, infrastructures and civil works, tertiary sector and industrial applications. Compatibility with the Pemsaband® One perforated and solid ranges.

Solutions



Product data			
ETIM 10	EC002413	u	8
Huella de CO2. GWP A1-A3 (kg CO2 eq.)	0,159	Material	Steel with surface coating
Protection System	GC	Working temperature range (°C)	-50 / 150 °C
Finish	HDG, Hot Dip Galvanised	Fire resistance	A1 No combustible
Resistance Class	Class 6		
Flange (mm)	60		
kg/u	0,061		

🔒 Protection System

CU

- Copper electroplated

PG

- Pregalvanised

EZ

- Electrogalvanised

BC

- Electrogalvanised Bichromate

BK8

- High Resistance Coating

GC

- Hot Dip Galvanising

INOX

- Stainless Steel

PT

- Polyester Paint

AL

- Aluminum

LN

- Brass or Nickel-plated brass

🔒 Insulating materials

PC+ABS

- Halogen Free Polycarbonate + ABS

PVC

- Polyvinyl Chloride

PP

- Halogen Free Polypropylene

PA6

- Halogen Free Polyamide 6

PA12

- Halogen Free Polyamide 12

PU

- Polyurethane

PE

- Polyethylene

NBR

- NBR rubber

PET

- Thermoplastic Polyester

TPV

- Thermoplastic

Product applications

