


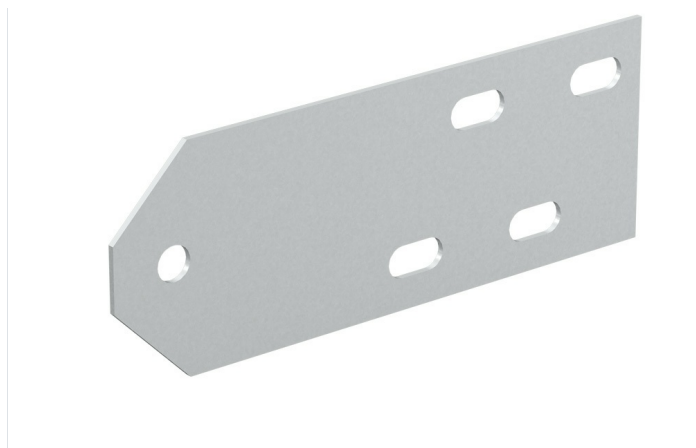

### Description

Articulated riser dropper for creating level changes, with adjustable angles, for Nemaband® ladder. It allows angles of descent and height changes at angles of 30°, 45°, 60° & 90° with great ease. Made from steel with GC Protection system.

### Advantages

Thanks to the articulation it allows the creation of level changes.

Use Nemaband® M8 joint kit screws or M8 hex nuts.

Electrical continuity guaranteed according to standard IEC61537.

GC Protection System. Hot dip Galvanised with 85 microns of thickness. Class 8 according to IEC 61537.

### Applications

Suitable for creating adjustable angle level changes in Nemaband® ladder for routing, protecting and distributing cables in electrical installations in industrial applications and large spans in: Oil & Gas and Petrochemical Industry, Power Plants, Electric Power Plants, etc. Water Treatment, Mining and Cement Offshore Platforms, Ports, Maritime Applications. Industrial projects in aggressive environments.

### Solutions



Main technical characteristics

|                                                                                    |                                                                                           |                                                                                            |                                                                                      |                                                                                                              |                                                                                                |                                                                                                       |
|------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------|
|  GC |  Class 7 |  100, 150 |  20 |  Steel with surface coating |  -50 / 150 °C |  A1 No combustible |
| ETIM 10                                                                            |                                                                                           |                                                                                            |                                                                                      |                                                                                                              |                                                                                                |                                                                                                       |
| EC002413                                                                           |                                                                                           |                                                                                            |                                                                                      |                                                                                                              |                                                                                                |                                                                                                       |

Product data

|  | Ref      | kg/u  |
|-----------------------------------------------------------------------------------|----------|-------|
| 100                                                                               | 82002743 | 0,200 |
| 150                                                                               | 82002744 | 0,251 |

 Protection System

- CU - Copper electroplated
- PG - Pregalvanised
- EZ - Electrogalvanised
- BC - Electrogalvanised Bichromate
- BK8 - High Resistance Coating
- GC - Hot Dip Galvanising
- INOX - Stainless Steel
- PT - Polyester Paint
- AL - Aluminum
- LN - Brass or Nickel-plated brass

 Insulating materials

- PC+ABS - Halogen Free Polycarbonate + ABS
- PVC - Polyvinyl Chloride
- PP - Halogen Free Polypropylene
- PA6 - Halogen Free Polyamide 6
- PA12 - Halogen Free Polyamide 12
- PU - Polyurethane
- PE - Polyethylene
- NBR - NBR rubber
- PET - Thermoplastic Polyester
- TPV - Thermoplastic