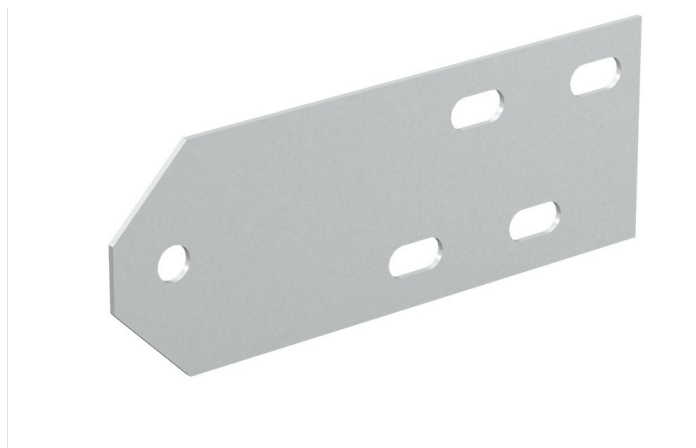


Description

Articulated riser dropper for creating level changes, with adjustable angles, for Nemaband® ladder. Of 100 mm height. It allows angles of descent and height changes at angles of 30°, 45°, 60° & 90° with great ease. Made from steel with GC Protection system.

Advantages

Electrical continuity guaranteed according to standard IEC61537.

Thanks to the articulation it allows the creation of level changes.

GC Protection System. Hot dip Galvanised with 85 microns of thickness. Class 8 according to IEC 61537.

Use Nemaband® M8 joint kit screws or M8 hex nuts.

Applications

Suitable for creating adjustable angle level changes in Nemaband® ladder for routing, protecting and distributing cables in electrical installations in industrial applications and large spans in: Oil & Gas and Petrochemical Industry, Power Plants, Electric Power Plants, etc. Water Treatment, Mining and Cement Offshore Platforms, Ports, Maritime Applications. Industrial projects in aggressive environments.

Solutions



Product data			
ETIM 10		EC002413	
Huella de CO2. GWP A1-A3 (kg CO2 eq.)		0,519	
Protection System		GC	
Finish		HDG, Hot Dip Galvanised	
Resistance Class		Class 7	
Flange (mm)		100	
kg/u		0,200	
u		20	
Material		Steel with surface coating	
Working temperature range (°C)		-50 / 150 °C	
Fire resistance		A1 No combustible	

 Protection System

CU - Copper electroplated

PG - Pregalvanised

EZ - Electrogalvanised

BC - Electrogalvanised Bichromate

BK8 - High Resistance Coating

GC - Hot Dip Galvanising

INOX - Stainless Steel

PT - Polyester Paint

AL - Aluminum

LN - Brass or Nickel-plated brass

 Insulating materials

PC+ABS - Halogen Free Polycarbonate + ABS

PVC - Polyvinyl Chloride

PP - Halogen Free Polypropylene

PA6 - Halogen Free Polyamide 6

PA12 - Halogen Free Polyamide 12

PU - Polyurethane

PE - Polyethylene

NBR - NBR rubber

PET - Thermoplastic Polyester

TPV - Thermoplastic