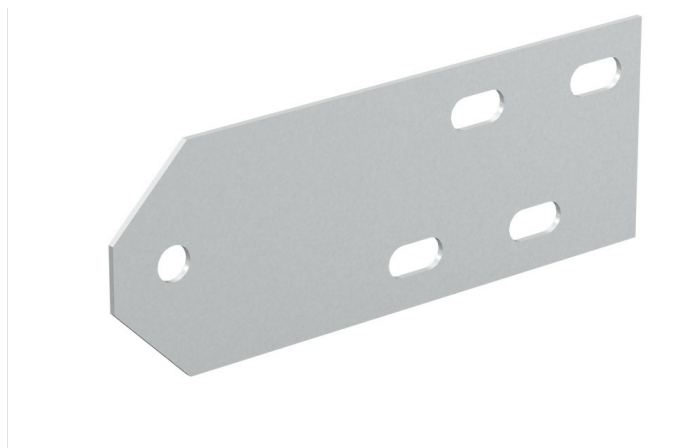


Description

Articulated riser dropper for creating level changes, with adjustable angles, for Nemaband® ladder. Of 150 mm height. It allows angles of descent and height changes at angles of 30°, 45°, 60° & 90° with great ease. Made from steel with GC Protection system.

Advantages

Electrical continuity guaranteed according to standard IEC61537.

Thanks to the articulation it allows the creation of level changes.

GC Protection System. Hot dip Galvanised with 85 microns of thickness. Class 8 according to IEC 61537.

Use Nemaband® M8 joint kit screws or M8 hex nuts.

Applications

Suitable for creating adjustable angle level changes in Nemaband® ladder for routing, protecting and distributing cables in electrical installations in industrial applications and large spans in: Oil & Gas and Petrochemical Industry, Power Plants, Electric Power Plants, etc. Water Treatment, Mining and Cement Offshore Platforms, Ports, Maritime Applications. Industrial projects in aggressive environments.

Solutions



Product data			
ETIM 10		EC002413	
Huella de CO2. GWP A1-A3 (kg CO2 eq.)		0,649	
Protection System		GC	
Finish		HDG, Hot Dip Galvanised	
Resistance Class		Class 7	
Flange (mm)		150	
kg/u		0,251	
u		20	
Material		Steel with surface coating	
Working temperature range (°C)		-50 / 150 °C	
Fire resistance		A1 No combustible	

Protection System
CU - Copper electroplated
PG - Pregalvanised
EZ - Electrogalvanised
BC - Electrogalvanised Bichromate
BK8 - High Resistance Coating
GC - Hot Dip Galvanising
INOX - Stainless Steel
PT - Polyester Paint
AL - Aluminum
LN - Brass or Nickel-plated brass

Insulating materials
PC+ABS - Halogen Free Polycarbonate + ABS
PVC - Polyvinyl Chloride
PP - Halogen Free Polypropylene
PA6 - Halogen Free Polyamide 6
PA12 - Halogen Free Polyamide 12
PU - Polyurethane
PE - Polyethylene
NBR - NBR rubber
PET - Thermoplastic Polyester
TPV - Thermoplastic