
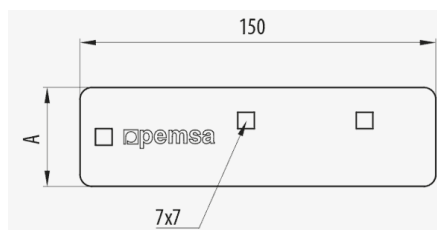


PEMSABAND Riser / Dropper

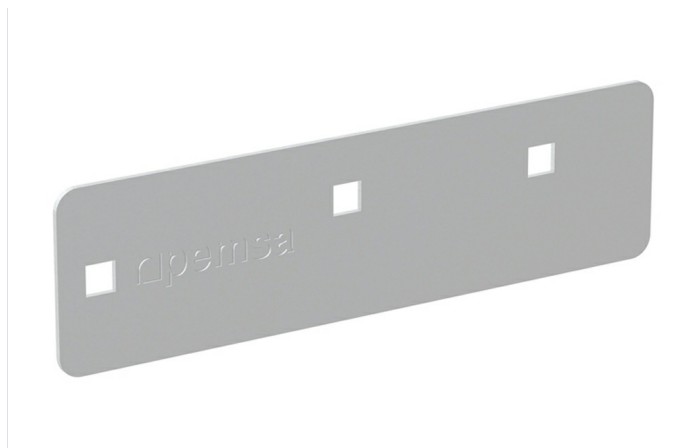

Description

Connector for joining between two sections of Pemsaband® tray of heights 35 and 60 mm. Thanks to its articulation it allows for the creation of level changes between two sections of Pemsaband® trays with just the use of screws. Manufactured in steel and available in GC and PG Protection Systems.

Advantages

Its unique design allows the articulation of different sections using only 4 pieces.

Connection between two tray sections at different levels.

Electrical continuity guaranteed according to standard IEC61537.

Available in protection systems: PG, pre-galvanized and GC, hot-dip galvanized

Applications

Suitable for joining straight lengths of Pemsaband® One perforated and solid tray of widths 300-600 mm, for the Support, management and distribution of Electrical and/or telecommunications cables in public buildings, infrastructures and civil works, tertiary sector and industrial applications.

Solutions



Main technical characteristics

 35, 60	 4	 Steel with surface coating	 -50 / 150 °C	 A1 No combustible	ETIM 10 EC002413
--	---	--	--	---	---------------------

Product data

			Ref	kg/u
PG	Class 3	35	71021006	0,031
PG	Class 3	60	71022006	0,074
GC	Class 5	35	71031006	0,032
GC	Class 6	60	71032006	0,078

 Protection System

- CU** - Copper electroplated
- PG** - Pregalvanised
- EZ** - Electrogalvanised
- BC** - Electrogalvanised Bichromate
- BK8** - High Resistance Coating
- GC** - Hot Dip Galvanising
- INOX** - Stainless Steel
- PT** - Polyester Paint
- AL** - Aluminum
- LN** - Brass or Nickel-plated brass

 Insulating materials

- PC+ABS** - Halogen Free Polycarbonate + ABS
- PVC** - Polyvinyl Chloride
- PP** - Halogen Free Polypropylene
- PA6** - Halogen Free Polyamide 6
- PA12** - Halogen Free Polyamide 12
- PU** - Polyurethane
- PE** - Polyethylene
- NBR** - NBR rubber
- PET** - Thermoplastic Polyester
- TPV** - Thermoplastic

Product applications

