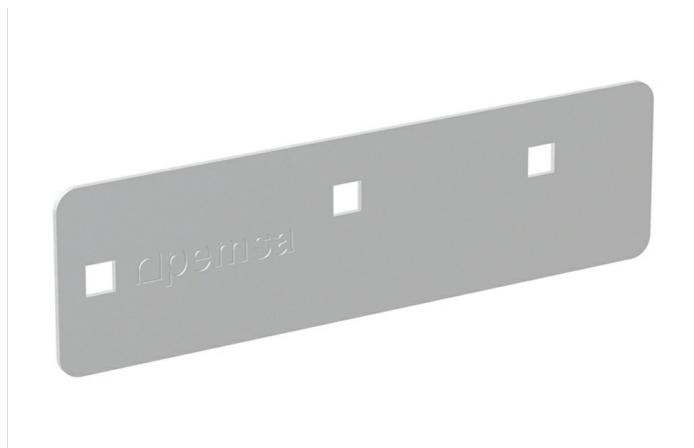


Description

Connector for joining between two sections of Pemsaband® tray of heights 35 and 60 mm. Of 35 mm height. Thanks to it's articulation it allows for the creation of level changes between two sections of Pemsaband® trays with just the use of screws. Manufactured in steel and available in GC and PG Protection Systems.

Advantages

Available in protection systems: PG, pre-galvanized and GC, hot-dip galvanized

Electrical continuity guaranteed according to standard IEC61537.

Its unique design allows the articulation of different sections using only 4 pieces.

Connection between two tray sections at different levels.

Applications

Suitable for joining straight lengths of Pemsaband® One perforated and solid tray of widths 300-600 mm, for the Support, management and distribution of Electrical and/or telecommunications cables in public buildings, infrastructures and civil works, tertiary sector and industrial applications.

Solutions



Product data

ETIM 10	EC002413	u	4
Huella de CO2. GWP A1-A3 (kg CO2 eq.)	0,099	Material	Steel with surface coating
Protection System	PG	Working temperature range (°C)	-50 / 150 °C
Finish	PG3, Pregalvanised	Fire resistance	A1 No combustible
Resistance Class	Class 3		
Flange (mm)	35		
kg/u	0,031		

Protection System

- CU - Copper electroplated
- PG - Pregalvanised
- EZ - Electrogalvanised
- BC - Electrogalvanised Bichromate
- BK8 - High Resistance Coating
- GC - Hot Dip Galvanising
- INOX - Stainless Steel
- PT - Polyester Paint
- AL - Aluminum
- LN - Brass or Nickel-plated brass

Insulating materials

- PC+ABS - Halogen Free Polycarbonate + ABS
- PVC - Polyvinyl Chloride
- PP - Halogen Free Polypropylene
- PA6 - Halogen Free Polyamide 6
- PA12 - Halogen Free Polyamide 12
- PU - Polyurethane
- PE - Polyethylene
- NBR - NBR rubber
- PET - Thermoplastic Polyester
- TPV - Thermoplastic



Product applications

