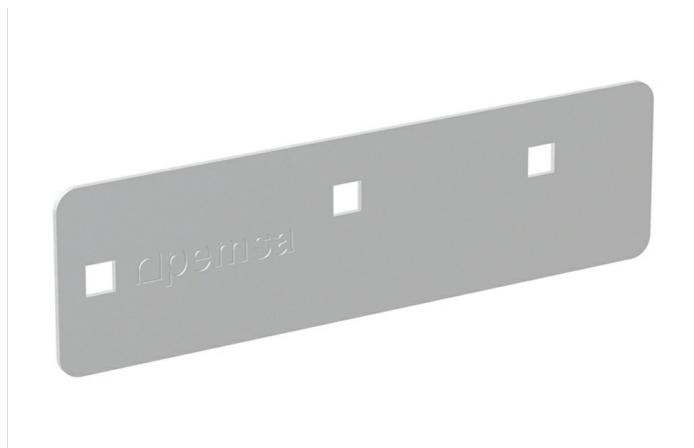


Description

Connector for joining between two sections of Pemsaband® tray of heights 35 and 60 mm. Of 60 mm height. Thanks to it's articulation it allows for the creation of level changes between two sections of Pemsaband® trays with just the use of screws. Manufactured in steel and available in GC and PG Protection Systems.

Advantages

Available in protection systems: PG, pre-galvanized and GC, hot-dip galvanized

Electrical continuity guaranteed according to standard IEC61537.

Its unique design allows the articulation of different sections using only 4 pieces.

Connection between two tray sections at different levels.

Applications

Suitable for joining straight lengths of Pemsaband® One perforated and solid tray of widths 300-600 mm, for the Support, management and distribution of Electrical and/or telecommunications cables in public buildings, infrastructures and civil works, tertiary sector and industrial applications.

Solutions



Product data			
ETIM 10		EC002413	
Huella de CO2. GWP A1-A3 (kg CO2 eq.)		0,237	
Protection System		PG	
Finish		PG3, Pregalvanised	
Resistance Class		Class 3	
Flange (mm)		60	
kg/u		0,074	
u		4	
Material		Steel with surface coating	
Working temperature range (°C)		-50 / 150 °C	
Fire resistance		A1 No combustible	

🔒 Protection System

CU - Copper electroplated

PG - Pregalvanised

EZ - Electrogalvanised

BC - Electrogalvanised Bichromate

BK8 - High Resistance Coating

GC - Hot Dip Galvanising

INOX - Stainless Steel

PT - Polyester Paint

AL - Aluminum

LN - Brass or Nickel-plated brass

🏠 Insulating materials

PC+ABS - Halogen Free Polycarbonate + ABS

PVC - Polyvinyl Chloride

PP - Halogen Free Polypropylene

PA6 - Halogen Free Polyamide 6

PA12 - Halogen Free Polyamide 12

PU - Polyurethane

PE - Polyethylene

NBR - NBR rubber

PET - Thermoplastic Polyester

TPV - Thermoplastic

Product applications

