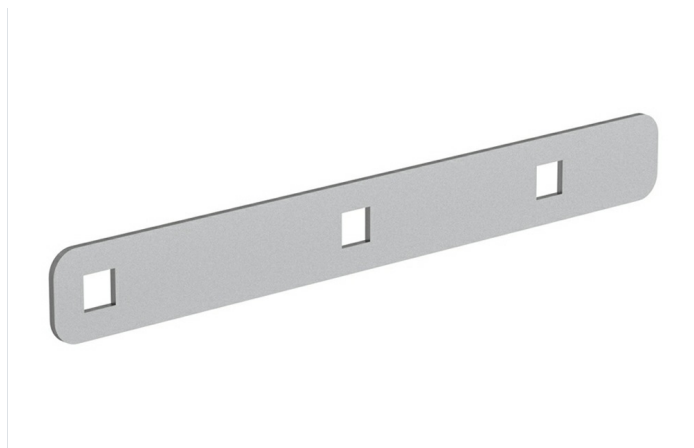


Description

Connector for joining between two sections of Pemsaband® tray of heights 35 and 60 mm. Of 35 mm height. Thanks to it's articulation it allows for the creation of level changes between two sections of Pemsaband® trays with just the use of screws. Manufactured in steel and available in GC and PG Protection Systems.

Advantages

Available in protection systems: PG, pre-galvanized and GC, hot-dip galvanized

Electrical continuity guaranteed according to standard IEC61537.

Its unique design allows the articulation of different sections using only 4 pieces.

Connection between two tray sections at different levels.

Applications

Suitable for joining straight lengths of Pemsaband® One perforated and solid tray of widths 300-600 mm, for the Support, management and distribution of Electrical and/or telecommunications cables in public buildings, infrastructures and civil works, tertiary sector and industrial applications.

Solutions



Product data			
ETIM 10		EC002413	
Huella de CO2. GWP A1-A3 (kg CO2 eq.)		0,084	
Protection System		GC	
Finish		HDG, Hot Dip Galvanised	
Resistance Class		Class 5	
Flange (mm)		35	
kg/u		0,032	
u		4	
Material		Steel with surface coating	
Working temperature range (°C)		-50 / 150 °C	
Fire resistance		A1 No combustible	

Protection System
CU - Copper electroplated
PG - Pregalvanised
EZ - Electrogalvanised
BC - Electrogalvanised Bichromate
BK8 - High Resistance Coating
GC - Hot Dip Galvanising
INOX - Stainless Steel
PT - Polyester Paint
AL - Aluminum
LN - Brass or Nickel-plated brass

Insulating materials
PC+ABS - Halogen Free Polycarbonate + ABS
PVC - Polyvinyl Chloride
PP - Halogen Free Polypropylene
PA6 - Halogen Free Polyamide 6
PA12 - Halogen Free Polyamide 12
PU - Polyurethane
PE - Polyethylene
NBR - NBR rubber
PET - Thermoplastic Polyester
TPV - Thermoplastic

Product applications

