


Metatray vertical hinge

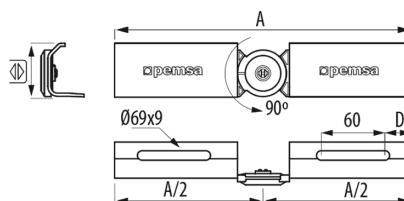

Description

Joint for creating variable angle level changes in insulating material. Grey RAL 7035 colour for easily and quickly creating changes of planes with variable angles.

Advantages

Thanks to the articulation it allows the creation of level changes.

Variable angle from -90° to +90°

Use with DIN603 M8 Metatray insulating screw kit. Ref 81000298.

Insulating material, electrical safety and reduced maintenance costs.

CE conformity to directive 2014/35 / EU.

Applications

Suitable for creating adjustable angle level changes for Metatray insulating trays in the routing of cables in electrical and telecommunications installations in different sectors from wastewater treatment plants to the chemical and petrochemical industry, establishing itself as a highly corrosion-resistant solution that meets the most demanding standards. Its application is also ideal in other different sectors: service, telecommunications, electric mobility through vehicle charging stations etc.

Solutions



www.pemsa-rejiband.com

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."

Metatray vertical hinge

Main technical characteristics

Colour	Grey RAL 7035		60, 100		12		-20 / 60 °C		GRADO UL94: V0		Resistant acc. to UL568	ETIM 10 EC002413
--------	---------------	---	---------	---	----	---	-------------	---	----------------	--	-------------------------	------------------

Product data

	Ref	kg/u
60	81000284	0,105
100	81000285	0,303

Protection System

CU - Copper electroplated

PG - Pregalvanised

EZ - Electrogalvanised

BC - Electrogalvanised Bichromate

BK8 - High Resistance Coating

GC - Hot Dip Galvanising

INOX - Stainless Steel

PT - Polyester Paint

AL - Aluminum

LN - Brass or Nickel-plated brass

Insulating materials

PC+ABS - Halogen Free Polycarbonate + ABS

PVC - Polyvinyl Chloride

PP - Halogen Free Polypropylene

PA6 - Halogen Free Polyamide 6

PA12 - Halogen Free Polyamide 12

PU - Polyurethane

PE - Polyethylene

NBR - NBR rubber

PET - Thermoplastic Polyester

TPV - Thermoplastic



Metatray vertical hinge

Product applications

