
Metatray vertical hinge (Ref: 81000284)



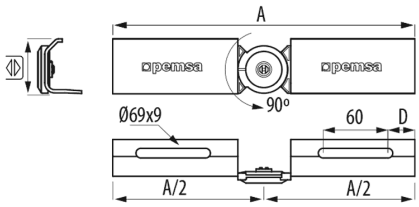

Description

Joint for creating variable angle level changes in insulating material. Of 60 mm height. Grey RAL 7035 colour for easily and quickly creating changes of planes with variable angles.

Advantages

Variable angle from -90º to +90º

CE conformity to directive 2014/35 / EU.

Insulating material, electrical safety and reduced maintenance costs.

Thanks to the articulation it allows the creation of level changes.

Use with DIN603 M8 Metatray insulating screw kit. Ref 81000298.

Applications

Suitable for creating adjustable angle level changes for Metatray insulating trays in the routing of cables in electrical and telecommunications installations in different sectors from wastewater treatment plants to the chemical and petrochemical industry, establishing itself as a highly corrosion-resistant solution that meets the most demanding standards. Its application is also ideal in other different sectors: service, telecommunications, electric mobility through vehicle charging stations etc.

Solutions

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."

Metatray vertical hinge (Ref: 81000284)

Product data

ETIM 10	EC002413	**Material**	PVC
Huella de CO2. GWP A1-A3 (kg CO2 eq.)	0	**Working temperature range (°C)**	-20 / 60 °C
Colour	Grey RAL 7035	**Fire resistance**	GRADO UL94: V0
Flange (mm)	60	**UV Behaviour**	Resistant acc. to UL568
kg/u	0,105		
u	12		

Ⓢ Protection System

CU - Copper electroplated

PG - Pregalvanised

EZ - Electrogalvanised

BC - Electrogalvanised Bichromate

BK8 - High Resistance Coating

GC - Hot Dip Galvanising

INOX - Stainless Steel

PT - Polyester Paint

AL - Aluminum

LN - Brass or Nickel-plated brass

Ⓜ Insulating materials

PC+ABS - Halogen Free Polycarbonate + ABS

PVC - Polyvinyl Chloride

PP - Halogen Free Polypropylene

PA6 - Halogen Free Polyamide 6

PA12 - Halogen Free Polyamide 12

PU - Polyurethane

PE - Polyethylene

NBR - NBR rubber


PET - Thermoplastic Polyester

TPV - Thermoplastic

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."

Metatray vertical hinge (Ref: 81000284)

Product applications

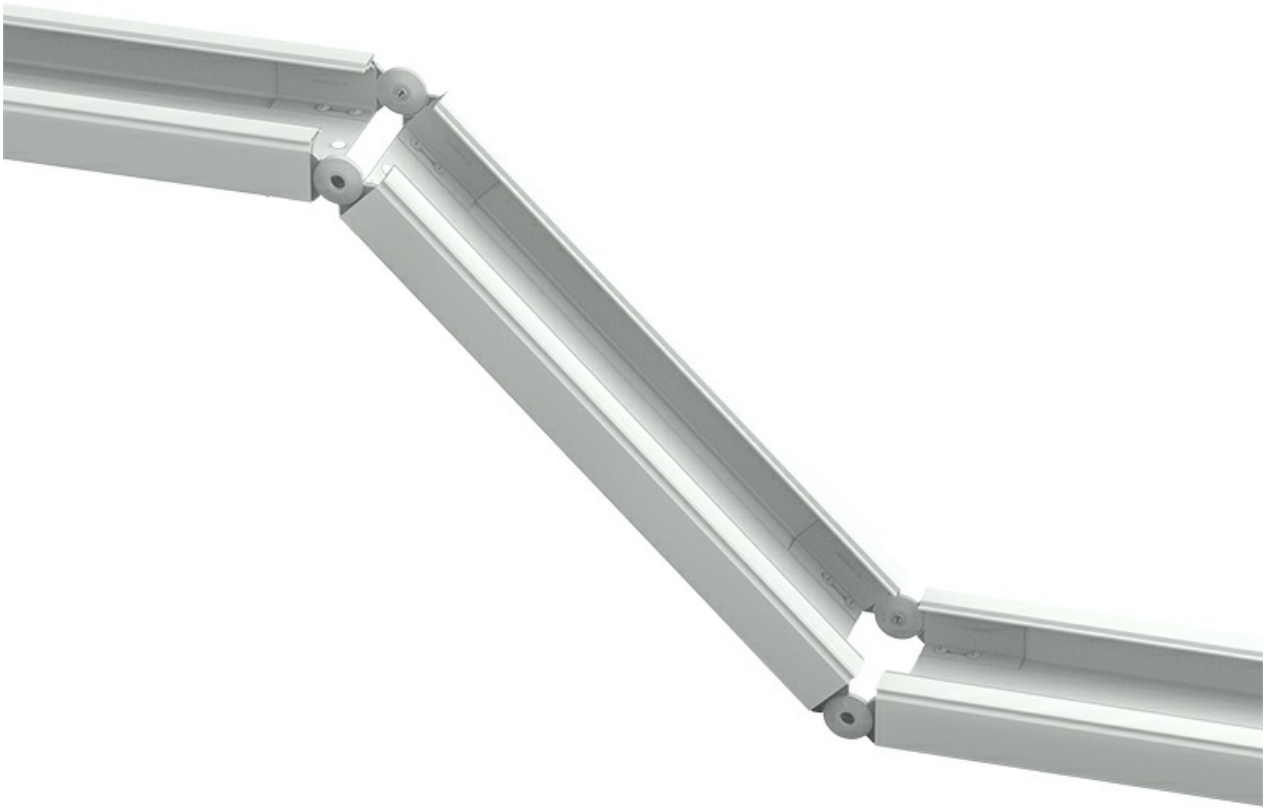

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."