


Metatray vertical hinge (Ref: 81000285)

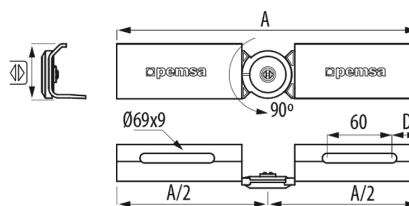

Description

Joint for creating variable angle level changes in insulating material. Of 100 mm height. Grey RAL 7035 colour for easily and quickly creating changes of planes with variable angles.

Advantages

Variable angle from -90° to +90°

CE conformity to directive 2014/35 / EU.

Insulating material, electrical safety and reduced maintenance costs.

Thanks to the articulation it allows the creation of level changes.

Use with DIN603 M8 Metatray insulating screw kit. Ref 81000298.

Applications

Suitable for creating adjustable angle level changes for Metatray insulating trays in the routing of cables in electrical and telecommunications installations in different sectors from wastewater treatment plants to the chemical and petrochemical industry, establishing itself as a highly corrosion-resistant solution that meets the most demanding standards. Its application is also ideal in other different sectors: service, telecommunications, electric mobility through vehicle charging stations etc.

Solutions



Product data

ETIM 10	EC002413	Material	PVC
Huella de CO2. GWP A1-A3 (kg CO2 eq.)	0,001	Working temperature range (°C)	-20 / 60 °C
Colour	Grey RAL 7035	Fire resistance	GRADO UL94: V0
Flange (mm)	100	UV Behaviour	Resistant acc. to UL568
kg/u	0,303		
u	12		

Protection System

CU - Copper electroplated

PG - Pregalvanised

EZ - Electrogalvanised

BC - Electrogalvanised Bichromate

BK8 - High Resistance Coating

GC - Hot Dip Galvanising

INOX - Stainless Steel

PT - Polyester Paint

AL - Aluminum

LN - Brass or Nickel-plated brass

Insulating materials

PC+ABS - Halogen Free Polycarbonate + ABS

PVC - Polyvinyl Chloride

PP - Halogen Free Polypropylene

PA6 - Halogen Free Polyamide 6

PA12 - Halogen Free Polyamide 12

PU - Polyurethane

PE - Polyethylene

NBR - NBR rubber

PET - Thermoplastic Polyester

TPV - Thermoplastic



Product applications

