
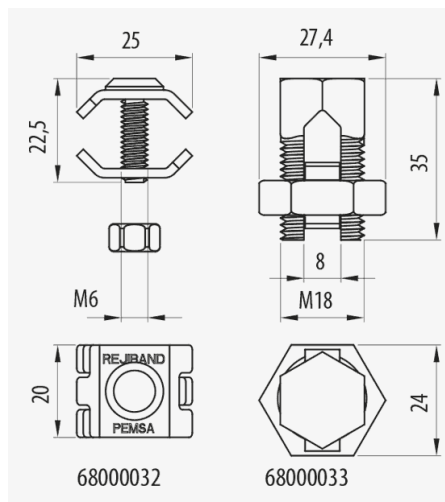


Bonding Connector (Ref: 68000033)

1/6

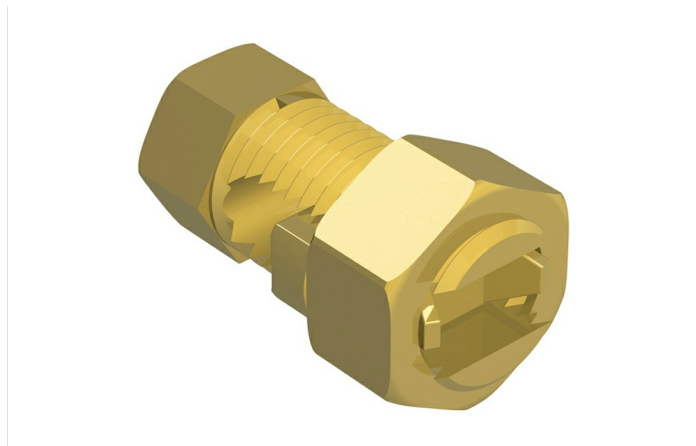

Description

Brass terminal for the equipotential bonding of the Rejiband® trays or for connection to the protective conductor and earthing of the electrical installation. Cables of 35-45 mm² of section, Of 6.5 / 7.5 mm of maximum diameter, With LTN protection system

Advantages

Ensures the equipotentiality of the continuous sections of Rejiband®.

Economical and reliable design.

It facilitates the earthing of the Rejiband® tray.

Select the reference according to the size of the conductor.

Applications

It is used for the equipotential connection of the Rejiband® trays or for their connection to the protective conductor and earthing of the electrical installation.

Solutions



www.pemsa-rejiband.com


Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."

Product data			
ETIM 10		EC002935	
Huella de CO2. GWP A1-A3 (kg CO2 eq.)			
Protection System		LTN	
Finish		Brass	
Section min (mm2)		35	
Cable diameter range		6.5 / 7.5	
A (mm)		35	
B (mm)		45	
kg/u		0,064	
u		20	
Material		Brass	
Working temperature range (°C)		-50 / 150 °C	

Protection System
CU - Copper electroplated
PG - Pregalvanised
EZ - Electrogalvanised
BC - Electrogalvanised Bichromate
BK8 - High Resistance Coating
GC - Hot Dip Galvanising
INOX - Stainless Steel
PT - Polyester Paint
AL - Aluminum
LN - Brass or Nickel-plated brass


Insulating materials
PC+ABS - Halogen Free Polycarbonate + ABS
PVC - Polyvinyl Chloride
PP - Halogen Free Polypropylene
PA6 - Halogen Free Polyamide 6
PA12 - Halogen Free Polyamide 12
PU - Polyurethane
PE - Polyethylene
NBR - NBR rubber
PET - Thermoplastic Polyester
TPV - Thermoplastic

Product applications

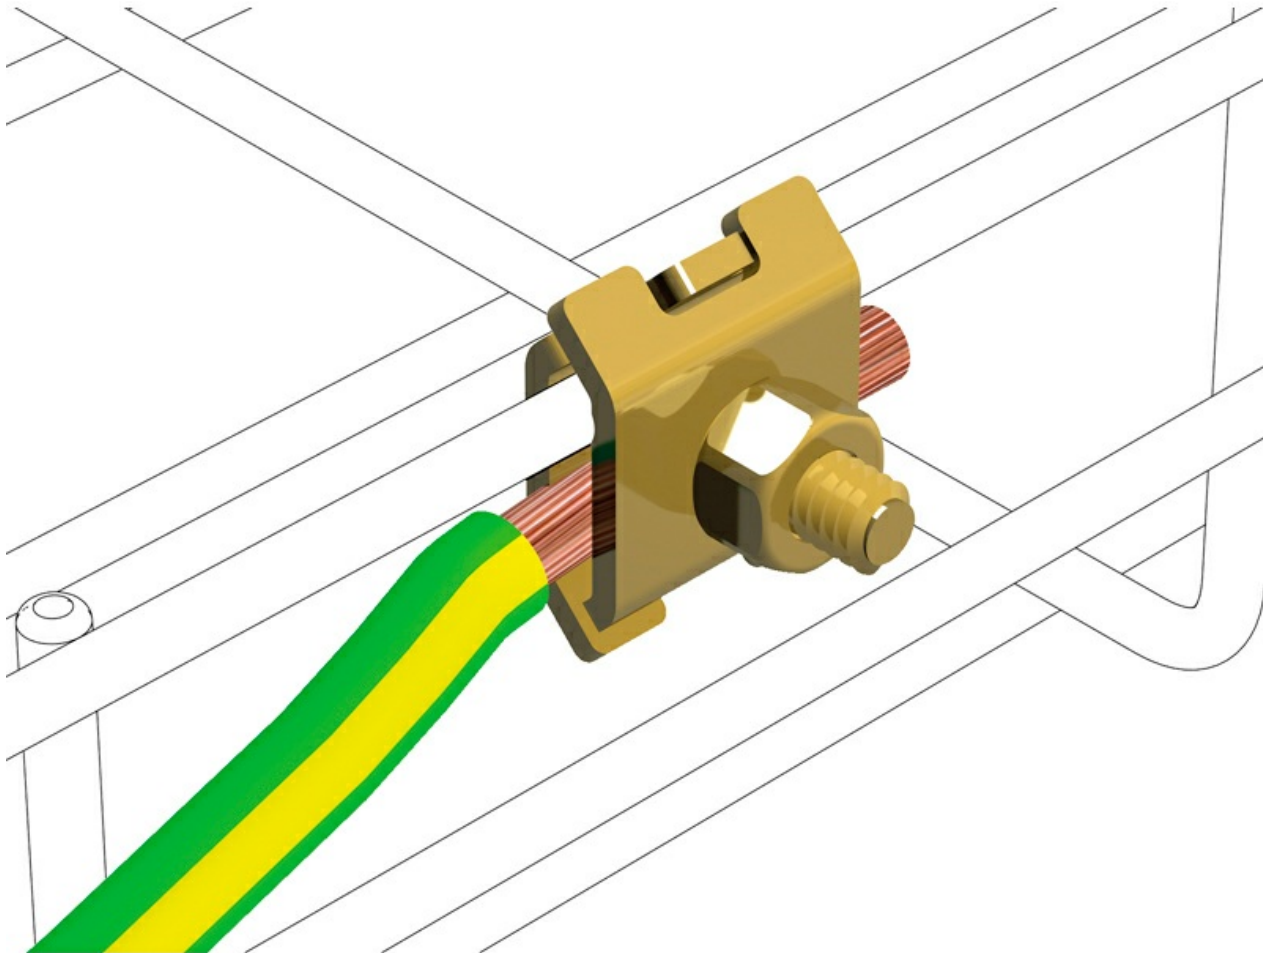


Bonding Connector (Ref: 68000033)

4/6

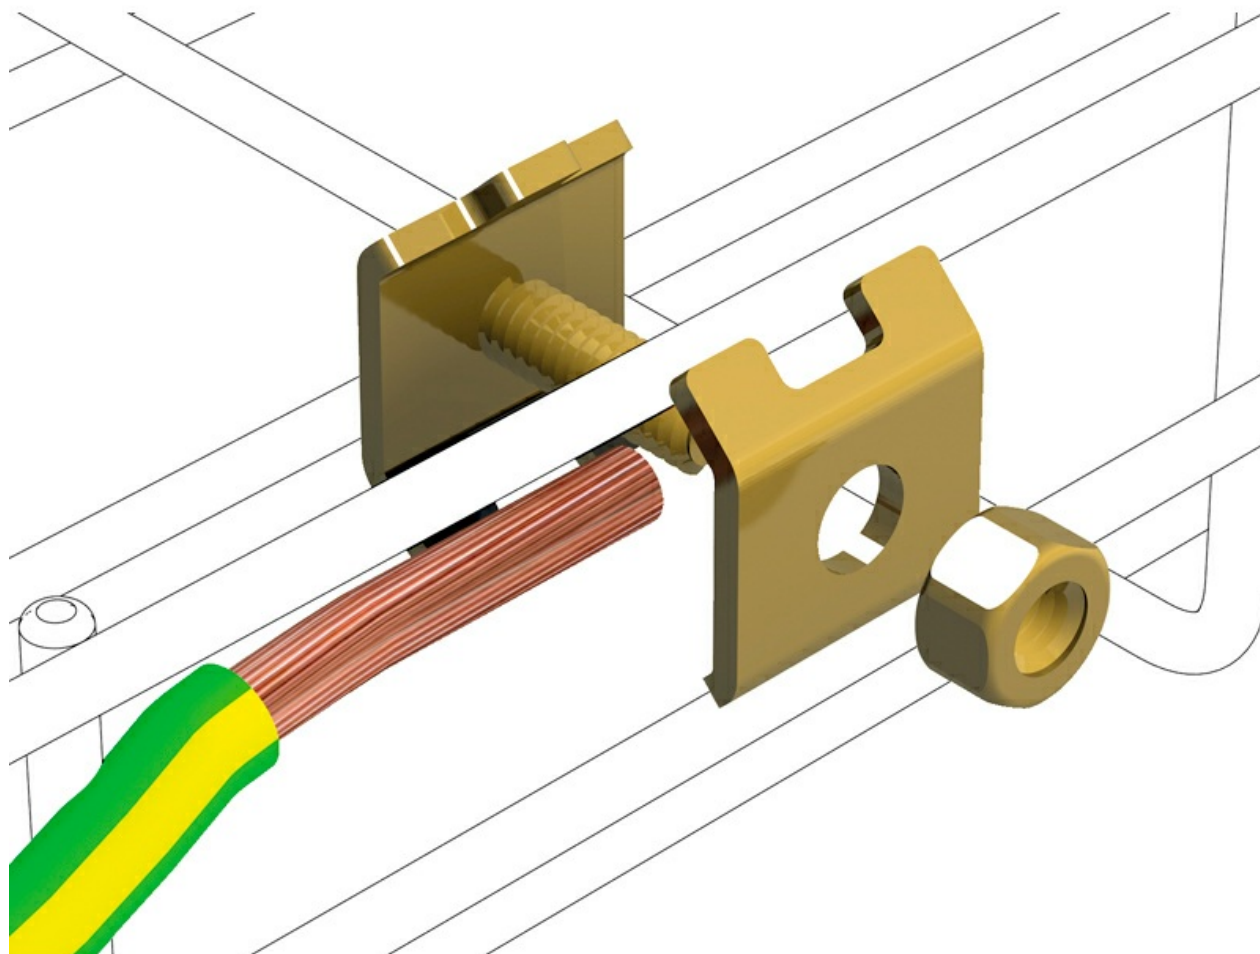

Bonding Connector (Ref: 68000033)

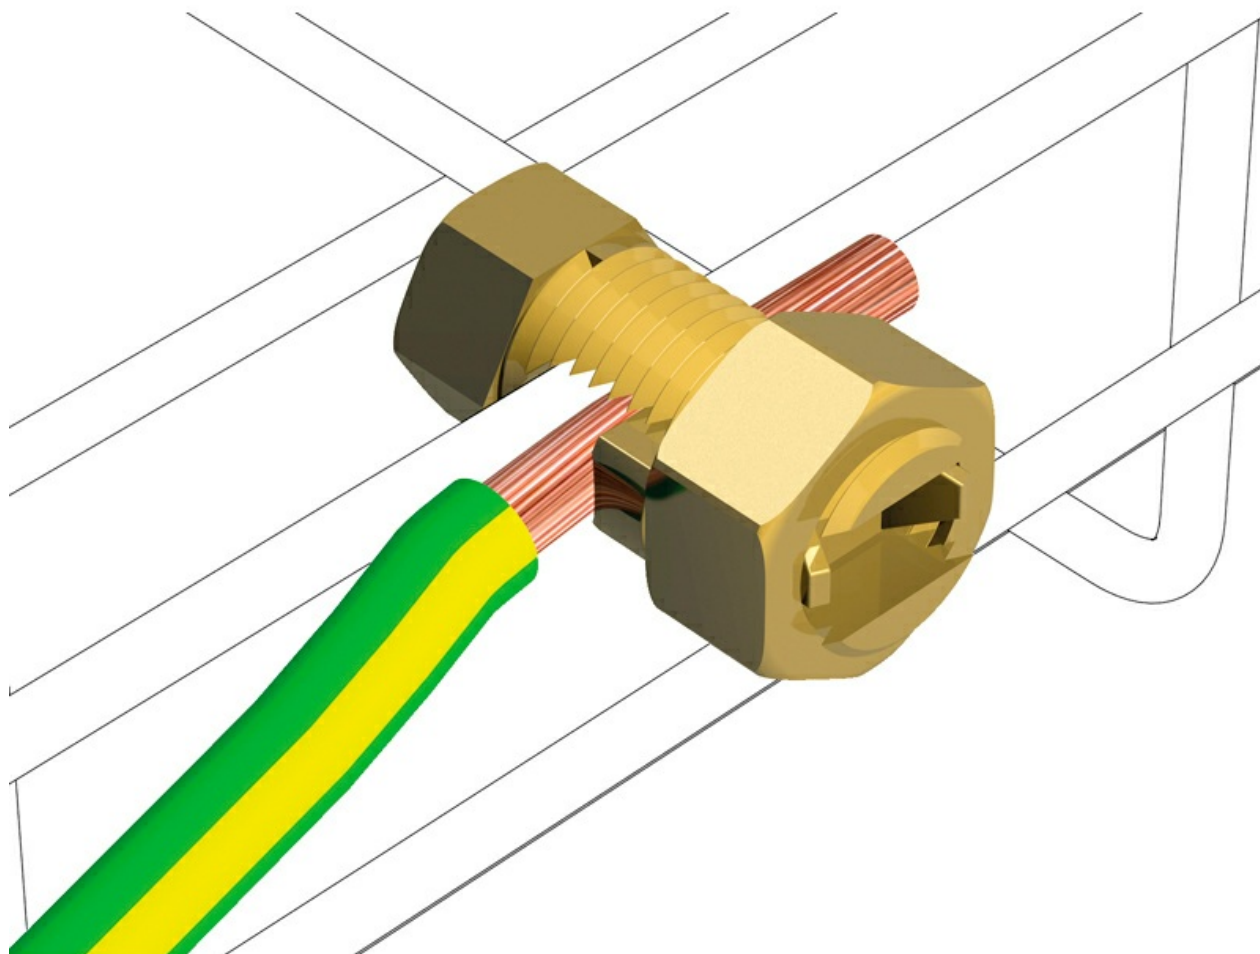

Bonding Connector (Ref: 68000033)

