
PLASTIC 7035 System

01/11/2026

CLH Halogen Free Corrugated Conduit



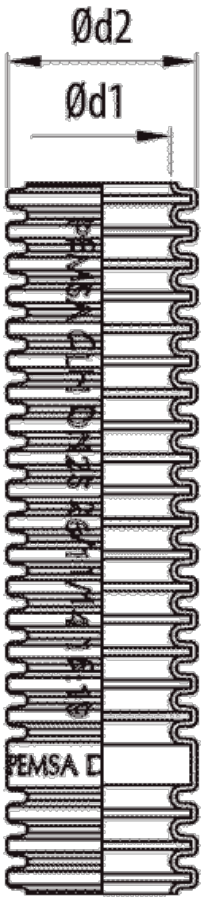

Description

CLH corrugated flexible conduit for the protection of electrical cables in building and tertiary applications. Made of plastic material (PP), halogen-free according to EN 50642 / EN IEC 63355 standard, with an IP65 protection rating, 320 N compression strength and 2 J impact resistance. Available in grey (RAL 7035), in various sizes.

Advantages

Halogen-free according to EN 50642 /EN IEC 63355

Suitable for installation in false ceilings and on interior walls and floors.

Impact resistance. Grade 3, 2 Joules

CE conformity with directive 2014/35 and EN IEC 61386-22.

High security, halogen free material UNE/EN 60754-2 y UNE/EN 60754-1. Reduced smoke opacity and toxicity in the event of a fire. Flame retardant.

Applications

Suitable for the protection of electrical wiring in building applications, tertiary sector and industry.

Solutions

SERVICE AND RETAIL

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."

CLH Halogen Free Corrugated Conduit

Main technical characteristics

Colour Grey RAL 7035 | DN NW16, NW20, NW25, NW32, NW40, NW50 | Polypropylene | Cod IEC 61386 23323 | 320 N | 2 J | IP65 | -15 / 90 °C | Flame retardant | ETIM 10 EC001175

Product data

DN	Od1	Od2		Ref	kg/u	Pu
NW16	11.2	16	125	10040216	0,035	100
NW20	14.4	20	125	10040220	0,046	100
NW25	18.4	25	140	10040225	0,062	75
NW32	24.8	32	140	10040232	0,092	50
NW40	31.6	40	100	10040240	0,115	25
NW50	40.4	50	70	10040250	0,159	25

Protection System

CU - Copper electroplated

PG - Pregalvanised

EZ - Electrogalvanised

BC - Electrogalvanised Bichromate

BK8 - High Resistance Coating

GC - Hot Dip Galvanising

INOX - Stainless Steel

PT - Polyester Paint

AL - Aluminum

LN - Brass or Nickel-plated brass

Insulating materials

PC+ABS - Halogen Free Polycarbonate + ABS

PVC - Polyvinyl Chloride

PP - Halogen Free Polypropylene

PA6 - Halogen Free Polyamide 6

PA12 - Halogen Free Polyamide 12

PU - Polyurethane

PE - Polyethylene

NBR - NBR rubber

PET - Thermoplastic Polyester

TPV - Thermoplastic

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."