
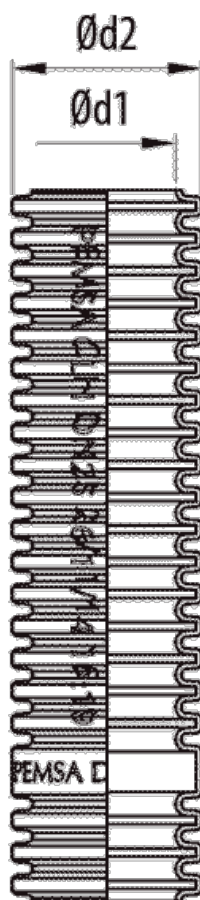


CLH Halogen Free Corrugated Conduit

1/2

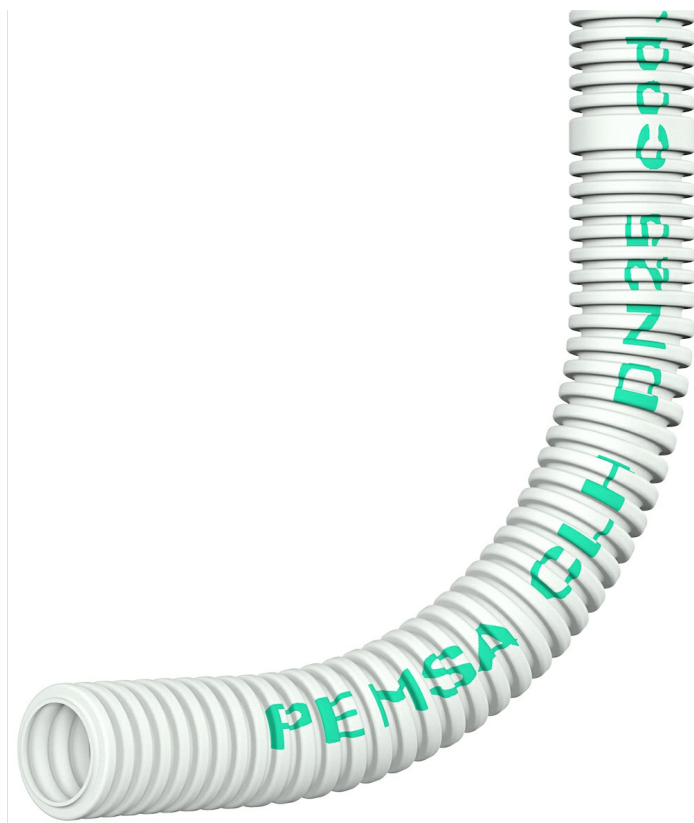

Description

CLH corrugated flexible conduit for the protection of electrical cables in building and tertiary applications. Made of plastic material (PP), halogen-free according to EN 50642 / EN IEC 63355 standard, with an IP65 protection rating, 320 N compression strength and 2 J impact resistance. Available in grey (RAL 7035), in various sizes.

Advantages

Halogen-free according to EN 50642 /EN IEC 63355

Suitable for installation in false ceilings and on interior walls and floors.

Impact resistance. Grade 3, 2 Joules

CE conformity with directive 2014/35 and EN IEC 61386-22.

High security, halogen free material UNE/EN 60754-2 y UNE/EN 60754-1. Reduced smoke opacity and toxicity in the event of a fire. Flame retardant.

Applications

Suitable for the protection of electrical wiring in building applications, tertiary sector and industry.

Solutions



SERVICE AND RETAIL



www.pemsa-rejiband.com

Any information included in this document is property of Pemsaband. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsaband. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsaband, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsaband Cable Management, S.A."



Main technical characteristics						
Colour	Grey RAL 7035	DN	NW16, NW20, NW25, NW32, NW40, NW50		Polypropylene	 23323
					320 N	 2 J
					IP65	
	-15 / 90 °C		Flame retardant	ETIM 10	EC001175	

Product data						
DN				Ref	kg/u	
NW16	11.2	16	125	10040216	0,035	100
NW20	14.4	20	125	10040220	0,046	100
NW25	18.4	25	140	10040225	0,062	75
NW32	24.8	32	140	10040232	0,092	50
NW40	31.6	40	100	10040240	0,115	25
NW50	40.4	50	70	10040250	0,159	25

 Protection System
CU - Copper electroplated
PG - Pregalvanised
EZ - Electrogalvanised
BC - Electrogalvanised Bichromate
BK8 - High Resistance Coating
GC - Hot Dip Galvanising
INOX - Stainless Steel
PT - Polyester Paint
AL - Aluminum
LN - Brass or Nickel-plated brass

 Insulating materials
PC+ABS - Halogen Free Polycarbonate + ABS
PVC - Polyvinyl Chloride
PP - Halogen Free Polypropylene
PA6 - Halogen Free Polyamide 6
PA12 - Halogen Free Polyamide 12
PU - Polyurethane
PE - Polyethylene
NBR - NBR rubber
PET - Thermoplastic Polyester
TPV - Thermoplastic