
PLASTIC 7035 System

31/10/2026

CLH Halogen Free Corrugated Conduit (

Ref: 10040216)



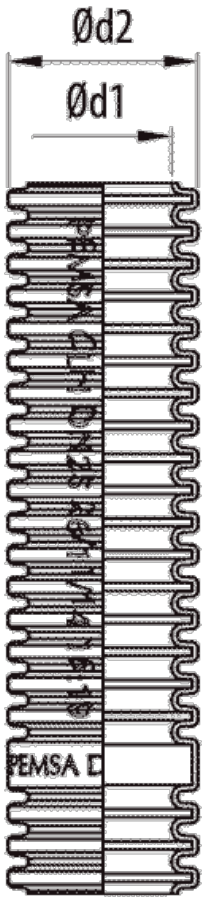

Description

CLH corrugated flexible conduit for the protection of electrical cables in building and tertiary applications. Made of plastic material (PP), halogen-free according to EN 50642 / EN IEC 63355 standard, with an IP65 protection rating, 320 N compression strength and 2 J impact resistance. Available in grey (RAL 7035), in various sizes.

Advantages

Suitable for installation in false ceilings and on interior walls and floors.

High security, halogen free material UNE/EN 60754-2 y UNE/EN 60754-1. Reduced smoke opacity and toxicity in the event of a fire. Flame retardant.

CE conformity with directive 2014/35 and EN IEC 61386-22.

Halogen-free according to EN 50642 /EN IEC 63355

Impact resistance. Grade 3, 2 Joules

Applications

Suitable for the protection of electrical wiring in building applications, tertiary sector and industry.

Solutions

SERVICE AND RETAIL

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."

PLASTIC 7035 System

31/10/2026

CLH Halogen Free Corrugated Conduit (

Ref: 10040216)

Product data

ETIM 10	EC001175	**Material**	Polypropylene
Huella de CO2. GWP A1-A3 (kg CO2 eq.)	9,129	**Cod. IEC.61386**	23323
Colour	Grey RAL 7035	**Compression strength (N)**	320 N
DN	NW16	**Impact Strength (J)**	2 J
Ø d1 (mm)	11.2	**IP**	IP65
Ø d2 (mm)	16	**Working temperature range (°C)**	-15 / 90 °C
R (mm)	125	**Fire resistance**	Flame retardant
kg/u	0,035		
u	100		

Ⓢ Protection System

CU - Copper electroplated

PG - Pregalvanised

EZ - Electrogalvanised

BC - Electrogalvanised Bichromate

BK8 - High Resistance Coating

GC - Hot Dip Galvanising

INOX - Stainless Steel

PT - Polyester Paint

AL - Aluminum

LN - Brass or Nickel-plated brass

Ⓜ Insulating materials

PC+ABS - Halogen Free Polycarbonate + ABS

PVC - Polyvinyl Chloride

PP - Halogen Free Polypropylene

PA6 - Halogen Free Polyamide 6

PA12 - Halogen Free Polyamide 12

PU - Polyurethane

PE - Polyethylene

NBR - NBR rubber

PET - Thermoplastic Polyester

TPV - Thermoplastic

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."