
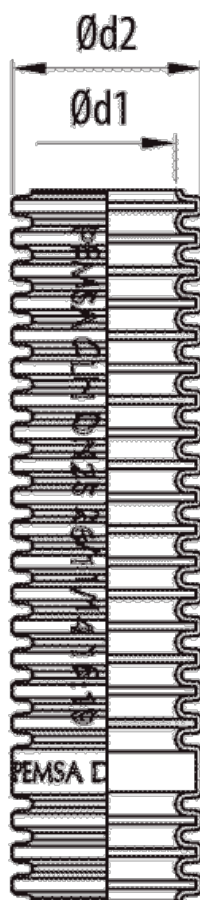


CLH Halogen Free Corrugated Conduit (

1/2

Ref: 10040225)

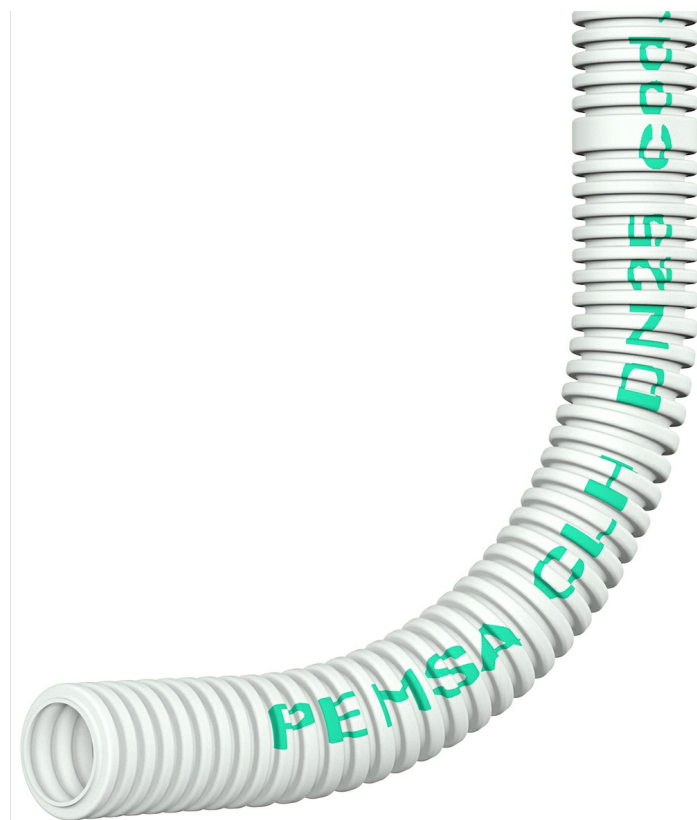

Description

CLH corrugated flexible conduit for the protection of electrical cables in building and tertiary applications. Made of plastic material (PP), halogen-free according to EN 50642 / EN IEC 63355 standard, with an IP65 protection rating, 320 N compression strength and 2 J impact resistance. Available in grey (RAL 7035), in various sizes.

Advantages

Suitable for installation in false ceilings and on interior walls and floors.

High security, halogen free material UNE/EN 60754-2 y UNE/EN 60754-1. Reduced smoke opacity and toxicity in the event of a fire. Flame retardant.

CE conformity with directive 2014/35 and EN IEC 61386-22.

Halogen-free according to EN 50642 /EN IEC 63355

Impact resistance. Grade 3, 2 Joules

Applications

Suitable for the protection of electrical wiring in building applications, tertiary sector and industry.

Solutions



SERVICE AND RETAIL



www.pemsa-rejiband.com

Any information included in this document is property of Pemsas®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsas®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsas, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsas Cable Management, S.A."



CLH Halogen Free Corrugated Conduit (

2/2

Ref: 10040225)

Product data

ETIM 10	EC001175	Material	Polypropylene
Huella de CO2. GWP A1-A3 (kg CO2 eq.)	0	Cod. IEC.61386	23323
Colour	Grey RAL 7035	Compression strength (N)	320 N
DN	NW25	Impact Strength (J)	2 J
Ø d1 (mm)	18.4	IP	IP65
Ø d2 (mm)	25	Working temperature range (°C)	-15 / 90 °C
R (mm)	140	Fire resistance	Flame retardant
kg/u	0,062		
u	75		

Protection System

- CU - Copper electroplated
- PG - Pregalvanised
- EZ - Electrogalvanised
- BC - Electrogalvanised Bichromate
- BK8 - High Resistance Coating
- GC - Hot Dip Galvanising
- INOX - Stainless Steel
- PT - Polyester Paint
- AL - Aluminum
- LN - Brass or Nickel-plated brass

Insulating materials

- PC+ABS - Halogen Free Polycarbonate + ABS
- PVC - Polyvinyl Chloride
- PP - Halogen Free Polypropylene
- PA6 - Halogen Free Polyamide 6
- PA12 - Halogen Free Polyamide 12
- PU - Polyurethane
- PE - Polyethylene
- NBR - NBR rubber
- PET - Thermoplastic Polyester
- TPV - Thermoplastic



www.pemsa-rejiband.com

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."

