


# CLH Halogen Free Corrugated Conduit (

1/2

Ref: 10040250 )

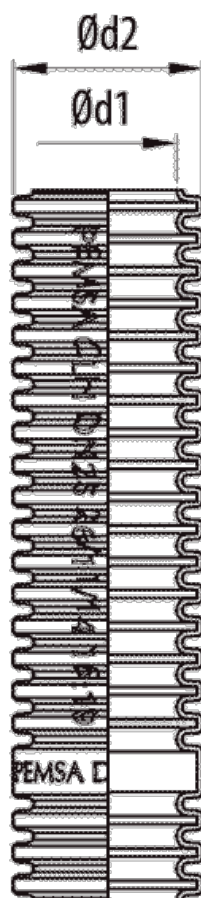

## Description

CLH corrugated flexible conduit for the protection of electrical cables in building applications. Made of plastic material (PP), halogen-free with an IP65 protection rating, 320 N compression strength and 2 J impact resistance. Available in grey (RAL 7035), in a wide variety of sizes.

## Advantages

Suitable for installation in false ceilings and on interior walls and floors.

High security, halogen free material UNE/EN 60754-2 y UNE/EN 60754-1. Reduced smoke opacity and toxicity in the event of a fire. Flame retardant.

CE conformity to the 2014/35 directive and the IEC 61386 standard.

Impact resistance. Grade 3, 2 Joules

## Applications

Suitable for the protection of electrical cables in building, tertiary and industrial applications with high safety requirements. Premises of public attendance.

## Solutions



EDIFICACIÓN. TERCARIO



[www.pemsa-rejiband.com](http://www.pemsa-rejiband.com)

Any information included in this document is property of Pemsaband. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsaband. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsaband, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsaband Cable Management, S.A."



Product data			
Colour		Grey RAL 7035	
DN		NW50	
Ø d1 (mm)		40.4	
Ø d2 (mm)		50	
R stat. (mm)		70	
kg/u		0.159	
u		25	
Material		Polypropylene	
Cod. IEC.61386		2332	
Compression strength (N)		320 N	
Impact Strength (J)		2 J	
IP		IP65	
Working temperature range (°C)		-15 / 90 °C	
Fire resistance		LIBRE DE HALÓGENOS,NO PROPAGADOR DE LA LLAMA	

Protection System
CU - Copper electroplated
PG - Pregalvanised
EZ - Electrogalvanised
BC - Electrogalvanised Bichromate
BK8 - High Resistance Coating
GC - Hot Dip Galvanising
INOX - Stainless Steel
PT - Polyester Paint
AL - Aluminum
LN - Brass or Nickel-plated brass

Insulating materials
PC+ABS - Halogen Free Polycarbonate + ABS
PVC - Polyvinyl Chloride
PP - Halogen Free Polypropylene
PA6 - Halogen Free Polyamide 6
PA12 - Halogen Free Polyamide 12
PU - Polyurethane
PE - Polyethylene
NBR - NBR rubber
PET - Thermoplastic Polyester
TPV - Thermoplastic