
1/2

18/04/2024 Assembly Accessories

Rail Clip





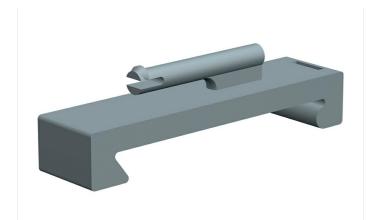





Description

Rail fixing clip in self-extinguishing halogen free polyamide 6 for the Pemsaflex® range of flexible conduits. Available in grey RAL 7011 and black RAL 9005.

Advantages

Manufactured in polyamide 6. Self-extinguishing, halogen-free according to UNE/EN 60754-2 y UNE/EN 60754-1 and flame-retardant.

Allows the connection of tube-to-rail supports for the fixing of flexible conduits of the Pemsaflex® range.

Working temperature: -25°C to + 105°C.

Available in two colours: Grey RAL 7011 and black RAL 9005.

CE conformity to the 2014/35 directive and the IEC 61386 standard.

Applications

Suitable for fixing Pemsaflex®, LG-PA, ST-PA, RF-PA, RB-PA and RB-PU conduits for the protection of wiring and conductors in electrical installations of machines, tools, industrial equipment, robots, vehicles and special facilities.

Solutions















Assembly Accessories 18/04/2024

Rail Clip

2/2

Main technical characteristics

CoLOUR Grey RAL 7011, Black RAL 9005

kg/u 0.002

M Poyamide 6

***** -25 / 105

ETIM

₩ 50

🗕 LIBRE DE HALÓGENOS,NO PROPAGADOR DE LA LLAMA

Product data

Colour	Ref
Grey RAL 7011	31097000
Black RAL 9005	32097000

S Protection System

cu - Copper electroplated

PG - Pregalvanised

EZ - Electrogalvanised

 $\ensuremath{\mathbf{BC}}$ - Electrogal vanised Bichromate

BK8 - High Resistance Coating

GC - Hot Dip Galvanising

PT - Polyester Paint

AL - Aluminum

LN - Brass or Nickel-plated brass

M Insulating materials

PC+ABS - Halogen Free Polycarbonate + ABS

PVC - Polyvinyl Chloride

PP - Halogen Free Polypropylene

PA6 - Halogen Free Polyamide 6

PA12 - Halogen Free Polyamide 12

PU - Polyurethane

PE - Polyethylene

NBR - NBR rubber

PET - Thermoplastic Polyester

TPV - Thermoplastic













