
# 90° Inside Riser MEGAband ( Ref: 93536600 )



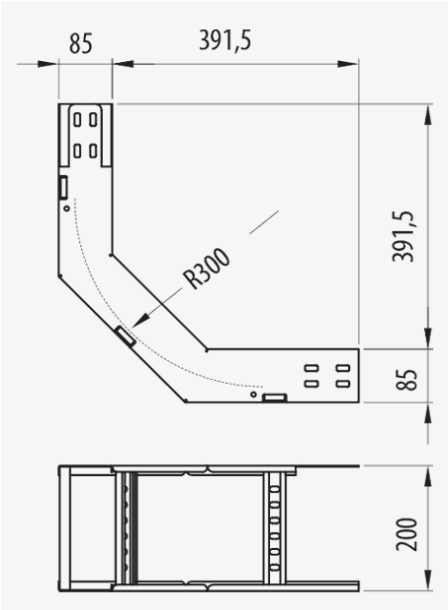


## Description

Metal accessory for the creation of an inside riser in the wiring installation with the Megaband® ladder. Of 150 mm height, Width 600 mm, With GC protection system, HDG finish. It allows to make rises and changes of angle at 90° with great ease. Quick connection assembly using the click system. Made of steel, in various sizes and Protection Systems. Bending radius 300 mm. Check availability of 600 mm radius.

## Advantages

Curved safety edge which offers maximum protection.

Connection to ladder by rapid assembly Click system. Only the Megaband® M8 joint kit or M8 nuts and bolts required

Available in various protection systems: EZ, GC and stainless steel AISI 304 and AISI 316L.

Electrical continuity guaranteed according to standard IEC61537.

Its design allows to make rises and changes of height with ease.

## Applications

Suitable for level changes in cable management in Megaband® trays in electrical and telecommunications installations in public buildings, infrastructures and civil works, industrial facilities, tertiary sector. Designed to withstand very high loads.

## Solutions



Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."

# 90° Inside Riser MEGAband ( Ref: 93536600 )

## Product data

| | | | |
|---|---|---|---|
| **ETIM 10** | EC001535 | **kg/u** | 4,901 |
| **Huella de CO2. GWP A1-A3 (kg CO2 eq.)** | 12,694 | **u** | 1 |
| **Protection System** | GC | **Material** | Steel with surface coating |
| **Finish** | HDG, Hot Dip Galvanised | **Impact Strength (J)** | 20 J |
| **Resistance Class** | Class 6 | **Working temperature range (°C)** | -50 / 150 °C |
| **Flange (mm)** | 150 | **Fire resistance** | A1 No combustible |
| **Width (mm)** | 600 | | |
| **R (mm)** | 300 | | |

## Ⓢ Protection System

**CU** - Copper electroplated

**PG** - Pregalvanised

**EZ** - Electrogalvanised

**BC** - Electrogalvanised Bichromate

**BK8** - High Resistance Coating

**GC** - Hot Dip Galvanising

**INOX** - Stainless Steel

**PT** - Polyester Paint

**AL** - Aluminum

**LN** - Brass or Nickel-plated brass

## Ⓜ Insulating materials

**PC+ABS** - Halogen Free Polycarbonate + ABS

**PVC** - Polyvinyl Chloride

**PP** - Halogen Free Polypropylene

**PA6** - Halogen Free Polyamide 6

**PA12** - Halogen Free Polyamide 12

**PU** - Polyurethane

**PE** - Polyethylene

**NBR** - NBR rubber

**PET** - Thermoplastic Polyester


**TPV** - Thermoplastic



Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."

# 90° Inside Riser MEGAband ( Ref: 93536600 )

## Product applications

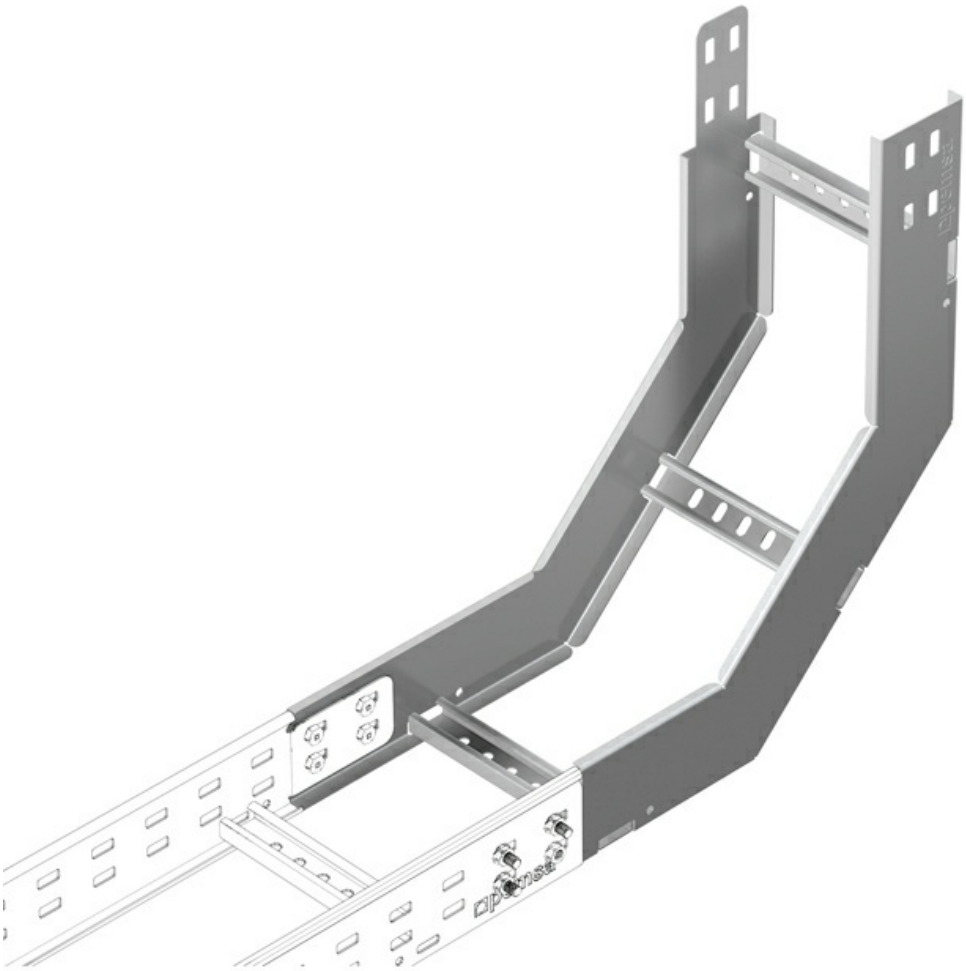



Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."