


Megaband REP 90° Inside Riser (Ref: 82002447)

1/2

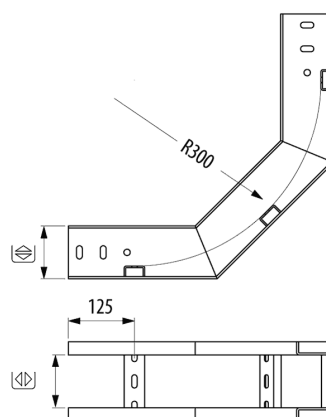

Description

Metal accessory for creating an inside riser in the wiring installation with the Megaband® REP ladder. Of 120 mm height, Width 600 mm. It allows descents and height changes to be made at a 90° angle with great ease. Assembly using bolts. Made from steel with GC Protection system.

Advantages

Conforms to IEC 61537 and CE Conformity to Directive 2014/35/EU.

Available in heights 70, 100 120 mm and widths 100 to 600 mm.

Specially designed for the petrochemical sector, with REPSOL approvals, ED-P-11-02

GC Protection System. Hot dip Galvanised with 85 microns of thickness. Class 8 according to IEC 61537.

Its design allows to make rises and changes of height with ease.

Applications

Suitable for creating level changes in the distribution of cables on Megaband® REP trays in electrical and telecommunications installations and supporting large loads in industrial, petrochemical, Oil & Gas, power plants, mining and cement installations.

Solutions



www.pemsa-rejiband.com

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."



Product data

ETIM 10	EC001535	kg/u	11,300
Huella de CO2. GWP A1-A3 (kg CO2 eq.)	29,267	u	1
Protection System	GC	Material	Steel with surface coating
Finish	HDG, Hot Dip Galvanised	Impact Strength (J)	20 J
Resistance Class	Class 8	Working temperature range (°C)	-50 / 150 °C
Flange (mm)	120	Fire resistance	A1 No combustible
Width (mm)	600		
R (mm)	300		
Angle	90		

Protection System

- CU - Copper electroplated
- PG - Pregalvanised
- EZ - Electrogalvanised
- BC - Electrogalvanised Bichromate
- BK8 - High Resistance Coating
- GC - Hot Dip Galvanising
- INOX - Stainless Steel
- PT - Polyester Paint
- AL - Aluminum
- LN - Brass or Nickel-plated brass

Insulating materials

- PC+ABS - Halogen Free Polycarbonate + ABS
- PVC - Polyvinyl Chloride
- PP - Halogen Free Polypropylene
- PA6 - Halogen Free Polyamide 6
- PA12 - Halogen Free Polyamide 12
- PU - Polyurethane
- PE - Polyethylene
- NBR - NBR rubber
- PET - Thermoplastic Polyester
- TPV - Thermoplastic

