


Nemaband Inside Riser

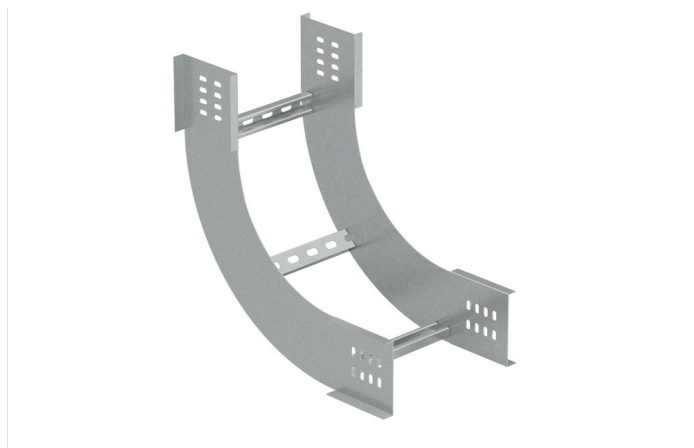

Description

Metal accessory for creating an inside riser in the wiring installation with the Nemaband® ladder. It allows angles of descent and height changes to be made with great ease avoiding damage to the cable routing. Made from steel with GC Protection system.

Advantages

Cable tray connection using M8 screws or Nemaband® M8 joint kit

Inside and Outside risers availables in 90°, 60°, 45°, 30° angles.

Reinforced profiles in C and Z formats that stiffen the construction of the cable ladder, to meet the demand in most markets.

Electrical continuity guaranteed according to standard IEC61537.

GC Protection System. Hot dip Galvanised with 85 microns of thickness. Class 8 according to IEC 61537.

Applications

Adecuado para creación de Cambios de nivel o altura en las gamas de Nemaband® para la canalización, protección y distribución de cables en Instalaciones eléctricas en aplicaciones Industriales y grandes vanos en: Industria Oil&Gas y Petroquímica, Centrales de Energía, Eléctricas, etc. Tratamiento de Agua, Minería y Cementera Plataformas Offshore, Puertos, aplicaciones marítimas. Proyectos industriales en entornos agresivos.

Solutions



INDUSTRIA PETROQUÍMICA ENERGÍA FOTOVOLTAICA



www.pemsa-rejiband.com

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."

Main technical characteristics

 GC	 Class 8	 100, 150	 150, 300, 450, 600, 750, 900	 1	 Steel with surface coating	 20 J
			ETIM			
 -50 / 150 °C	 A1 No combustible					

Product data

			Ref		kg/u
100	150	300	30	82002894	3.391
100	300	300	30	82002895	3.871
100	450	300	30	82002896	4.341
100	600	300	30	82002897	4.821
100	750	300	30	82002898	5.291
100	900	300	30	82002899	5.761
150	150	300	30	82002900	3.811
150	300	300	30	82002901	4.291
150	450	300	30	82002902	4.761
150	600	300	30	82002903	5.241
150	750	300	30	82002904	5.711
150	900	300	30	82002905	6.181
100	150	600	30	82002906	3.891
100	300	600	30	82002907	4.601
100	450	600	30	82002908	5.311
100	600	600	30	82002909	6.021
100	750	600	30	82002910	6.741
100	900	600	30	82002911	7.451
150	150	600	30	82002912	4.441
150	300	600	30	82002913	5.151
150	450	600	30	82002914	5.861
150	600	600	30	82002915	6.571
150	750	600	30	82002916	7.291
150	900	600	30	82002917	8.001
100	150	300	45	82002918	3.761
100	300	300	45	82002919	4.471
100	450	300	45	82002920	5.181
100	600	300	45	82002921	5.891
100	750	300	45	82002922	6.611
100	900	300	45	82002923	7.321
150	150	300	45	82002924	4.271
150	300	300	45	82002925	4.981
150	450	300	45	82002926	5.691
150	600	300	45	82002927	6.041
150	750	300	45	82002928	7.121

				Ref	kg/u
150	900	300	45	82002929	7.831
100	150	600	45	82002930	4.141
100	300	600	45	82002931	4.851
100	450	600	45	82002932	5.561
100	600	600	45	82002933	6.271
100	750	600	45	82002934	6.991
100	900	600	45	82002935	7.701
150	150	600	45	82002936	4.851
150	300	600	45	82002937	5.561
150	450	600	45	82002938	6.271
150	600	600	45	82002939	6.981
150	750	600	45	82002940	7.701
150	900	600	45	82002941	8.411
100	150	300	60	82002942	3.891
100	300	300	60	82002943	4.601
100	450	300	60	82002944	5.311
100	600	300	60	82002945	6.021
100	750	300	60	82002946	6.751
100	900	300	60	82002947	7.451
150	150	300	60	82002948	4.491
150	300	300	60	82002949	5.201
150	450	300	60	82002950	5.911
150	600	300	60	82002951	6.621
150	750	300	60	82002952	7.461
150	900	300	60	82002953	8.041
100	150	600	60	82002954	4.401
100	300	600	60	82002955	5.111
100	450	600	60	82002956	5.821
100	600	600	60	82002957	6.531
100	750	600	60	82002958	7.251
100	900	600	60	82002959	7.961
150	150	600	60	82002960	5.251
150	300	600	60	82002961	5.961
150	450	600	60	82002962	6.671
150	600	600	60	82002963	7.381
150	750	600	60	82002964	8.101
150	900	600	60	82002965	8.811
100	150	300	90	82002966	4.151
100	300	300	90	82002967	4.861
100	450	300	90	82002968	5.571
100	600	300	90	82002969	6.281

				Ref	kg/u
100	750	300	90	82002970	7.001
100	900	300	90	82002971	7.711
150	150	300	90	82002972	4.911
150	300	300	90	82002973	5.621
150	450	300	90	82002974	6.331
150	600	300	90	82002975	7.041
150	750	300	90	82002976	7.761
150	900	300	90	82002977	8.471
100	150	600	90	82002978	5.161
100	300	600	90	82002979	6.111
100	450	600	90	82002980	7.051
100	600	600	90	82002981	8.001
100	750	600	90	82002982	8.951
100	900	600	90	82002983	9.901
150	150	600	90	82002984	6.321
150	300	600	90	82002985	7.271
150	450	600	90	82002986	8.211
150	600	600	90	82002987	9.161
150	750	600	90	82002988	10.101
150	900	600	90	82002989	11.101

 Protection System

- CU** - Copper electroplated
- PG** - Pregalvanised
- EZ** - Electrogalvanised
- BC** - Electrogalvanised Bichromate
- BK8** - High Resistance Coating
- GC** - Hot Dip Galvanising
- INOX** - Stainless Steel
- PT** - Polyester Paint
- AL** - Aluminum
- LN** - Brass or Nickel-plated brass

 Insulating materials

- PC+ABS** - Halogen Free Polycarbonate + ABS
- PVC** - Polyvinyl Chloride
- PP** - Halogen Free Polypropylene
- PA6** - Halogen Free Polyamide 6
- PA12** - Halogen Free Polyamide 12
- PU** - Polyurethane
- PE** - Polyethylene

Nemaband Inside Riser

NBR - NBR rubber

PET - Thermoplastic Polyester

TPV - Thermoplastic

