
Nemaband Accessories

17/11/2026

Nemaband Inside Riser

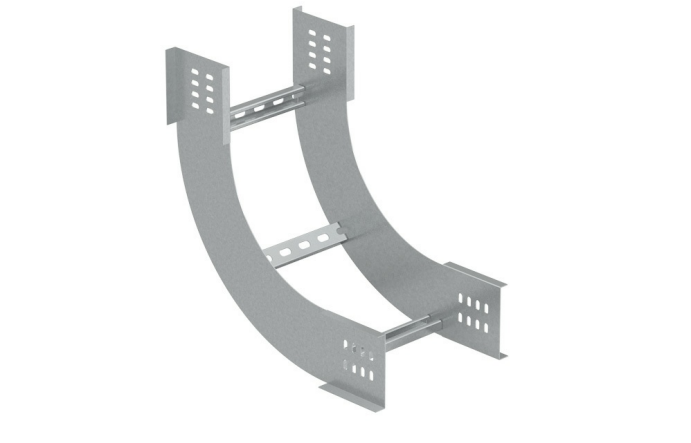

Description

Metal accessory for creating an inside riser in the wiring installation with the Nemaband® ladder. It allows angles of descent and height changes to be made with great ease avoiding damage to the cable routing. Made from steel with GC Protection system.

Advantages

Cable tray connection using M8 screws or Nemaband® M8 joint kit

Inside and Outside risers availables in 90°, 60°, 45°, 30° angles.

Reinforced profiles in C and Z formats that stiffen the construction of the cable ladder, to meet the demand in most markets.

Electrical continuity guaranteed according to standard IEC61537.

GC Protection System. Hot dip Galvanised with 85 microns of thickness. Class 8 according to IEC 61537.

Applications

Suitable for creating level or height changes in the Nemaband® ranges for routing, protecting and distributing cables in electrical installations in industrial applications and large spans in: Oil & Gas and Petrochemical Industry, Power Plants, Electric Power Plants, etc. Water Treatment, Mining and Cement Offshore Platforms, Ports, Maritime Applications. Industrial projects in aggressive environments.

Solutions

OFFSHORE, PORTS ENERGY RENEWABLE ENERGIES

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."

Main technical characteristics

GC | Class 8 | 100, 150 | 150, 300, 450, 600, 750, 900 | 1 | Steel with surface coating | 20 J | -50 / 150 °C | A1 No combustible | ETIM 10 EC001535

Product data

				REF	kg/u
100	150	300	30	82002894	2,290
100	300	300	30	82002895	2,740
100	450	300	30	82002896	3,200
100	600	300	30	82002897	3,660
100	750	300	30	82002898	4,110
100	900	300	30	82002899	4,570
150	150	300	30	82002900	3,130
150	300	300	30	82002901	3,590
150	450	300	30	82002902	4,040
150	600	300	30	82002903	4,500
150	750	300	30	82002904	4,960
150	900	300	30	82002905	5,410
100	150	600	30	82002906	3,020
100	300	600	30	82002907	3,710
100	450	600	30	82002908	4,390
100	600	600	30	82002909	6,020
100	750	600	30	82002910	5,760
100	900	600	30	82002911	6,440
150	150	600	30	82002912	4,130
150	300	600	30	82002913	4,820
150	450	600	30	82002914	5,500
150	600	600	30	82002915	6,190
150	750	600	30	82002916	6,870
150	900	600	30	82002917	7,560
100	150	300	45	82002918	2,780
100	300	300	45	82002919	3,460
100	450	300	45	82002920	4,140
100	600	300	45	82002921	4,830
100	750	300	45	82002922	5,510
100	900	300	45	82002923	6,200
150	150	300	45	82002924	3,790
150	300	300	45	82002925	4,470
150	450	300	45	82002926	5,160
150	600	300	45	82002927	5,840
150	750	300	45	82002928	6,520

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."

				REF	kg/u
150	900	300	45	82002929	7,210
100	150	600	45	82002930	3,540
100	300	600	45	82002931	4,220
100	450	600	45	82002932	4,910
100	600	600	45	82002933	5,590
100	750	600	45	82002934	6,280
100	900	600	45	82002935	6,960
150	150	600	45	82002936	4,950
150	300	600	45	82002937	5,630
150	450	600	45	82002938	6,320
150	600	600	45	82002939	7,000
150	750	600	45	82002940	7,690
150	900	600	45	82002941	8,370
100	150	300	60	82002942	3,040
100	300	300	60	82002943	3,720
100	450	300	60	82002944	4,400
100	600	300	60	82002945	5,090
100	750	300	60	82002946	5,770
100	900	300	60	82002947	6,460
150	150	300	60	82002948	4,220
150	300	300	60	82002949	4,900
150	450	300	60	82002950	5,590
150	600	300	60	82002951	6,270
150	750	300	60	82002952	6,950
150	900	300	60	82002953	7,640
100	150	600	60	82002954	4,050
100	300	600	60	82002955	4,740
100	450	600	60	82002956	5,420
100	600	600	60	82002957	6,110
100	750	600	60	82002958	6,790
100	900	600	60	82002959	7,470
150	150	600	60	82002960	5,770
150	300	600	60	82002961	6,450
150	450	600	60	82002962	7,130
150	600	600	60	82002963	7,820
150	750	600	60	82002964	8,500
150	900	600	60	82002965	9,190
100	150	300	90	82002966	3,570
100	300	300	90	82002967	4,250
100	450	300	90	82002968	4,930
100	600	300	90	82002969	5,620

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."

Nemaband Inside Riser

				REF	kg/u
100	750	300	90	82002970	6,300
100	900	300	90	82002971	6,990
150	150	300	90	82002972	5,080
150	300	300	90	82002973	5,770
150	450	300	90	82002974	6,450
150	600	300	90	82002975	7,140
150	750	300	90	82002976	7,820
150	900	300	90	82002977	8,500
100	150	600	90	82002978	5,330
100	300	600	90	82002979	6,240
100	450	600	90	82002980	7,150
100	600	600	90	82002981	8,060
100	750	600	90	82002982	8,980
100	900	600	90	82002983	9,890
150	150	600	90	82002984	7,640
150	300	600	90	82002985	8,560
150	450	600	90	82002986	9,470
150	600	600	90	82002987	10,380
150	750	600	90	82002988	11,290
150	900	600	90	82002989	12,200

Protection System

CU - Copper electroplated

PG - Pregalvanised

EZ - Electrogalvanised

BC - Electrogalvanised Bichromate

BK8 - High Resistance Coating

GC - Hot Dip Galvanising

INOX - Stainless Steel

PT - Polyester Paint

AL - Aluminum

LN - Brass or Nickel-plated brass

Insulating materials

PC+ABS - Halogen Free Polycarbonate + ABS

PVC - Polyvinyl Chloride

PP - Halogen Free Polypropylene

PA6 - Halogen Free Polyamide 6

PA12 - Halogen Free Polyamide 12

PU - Polyurethane

PE - Polyethylene

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."

Nemaband Inside Riser

NBR - NBR rubber

PET - Thermoplastic Polyester

TPV - Thermoplastic

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."