


PQ Inside Riser

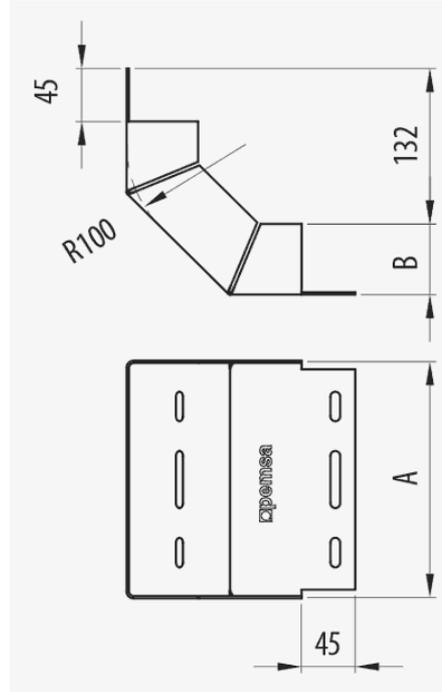

Description

Metal accessory for the creation of a 90° Inside Riser in the wiring installation of the Pemsaband® PQU and PQW tray. It enables a change of height in a vertical direction with great ease and avoids any damage in the routing of the cables. Joins with nuts and bolts. Approved according to CEPSA and REPSOL specifications. Made of steel, with GC Protection System 85 microns thick.

Advantages

Compatible with Pemsaband® PQU and Pemsaband® PQW ranges.

Available for all heights 15, 30, 50, 60 and in widths from 100 to 600.

Conforms to IEC 61537 and CE Conformity to Directive 2014/35/EU.

Specially designed for the petrochemical sector, with CEPSA and REPSOL approvals.

GC protection system (standard UNE-EN ISO 1461), suitable for outdoor installations and in aggressive environments. Corrosion resistance class 8 according to IEC 61537.

Applications

Suitable for the creation of level changes and 90° angle rises in Pemsaband® PQU and PQW trays, for the Support, management and distribution of cables in Petrochemical, Oil & Gas, Offshore, Civil works and Infrastructures, as well as in tunnels and installation galleries.

Solutions



www.pemsa-rejiband.com



Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."

PQ Inside Riser

Main technical characteristics

GC	Class 8	50, 60	400, 500, 600, 100, 150, 200, 300	100	1	Steel with surface coating
20J	-50 / 150 °C	A1 No combustible	ETIM EC002400			

Product data

⊕	⊕	Ref	kg/u
50	400	70243240	2.281
50	500	70243250	2.821
50	600	70243260	3.311
60	100	70243310	0.871
60	150	70243315	1.131
60	200	70243320	1.411
60	300	70243330	1.951
60	400	70243340	2.471
60	500	70243350	3.031
60	600	70243360	3.551

Protection System

- CU - Copper electroplated
- PG - Pregalvanised
- EZ - Electroalvanised
- BC - Electroalvanised Bichromate
- BK8 - High Resistance Coating
- GC - Hot Dip Galvanising
- INOX - Stainless Steel
- PT - Polyester Paint
- AL - Aluminum
- LN - Brass or Nickel-plated brass

Insulating materials

- PC+ABS - Halogen Free Polycarbonate + ABS
- PVC - Polyvinyl Chloride
- PP - Halogen Free Polypropylene
- PA6 - Halogen Free Polyamide 6
- PA12 - Halogen Free Polyamide 12
- PU - Polyurethane
- PE - Polyethylene
- NBR - NBR rubber
- PET - Thermoplastic Polyester
- TPV - Thermoplastic



www.pemsa-rejiband.com



Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."