

PQ Inside Riser

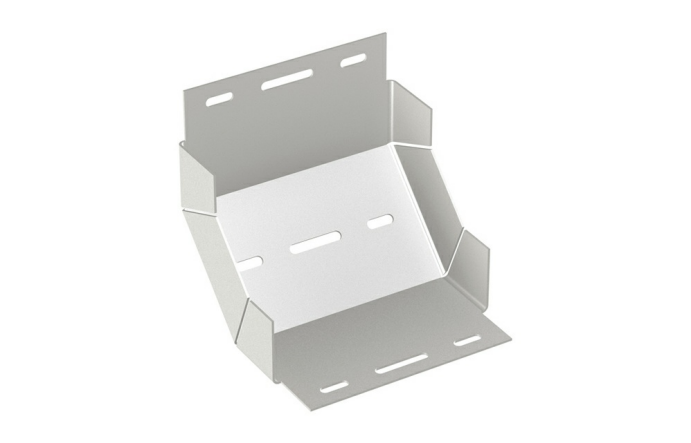

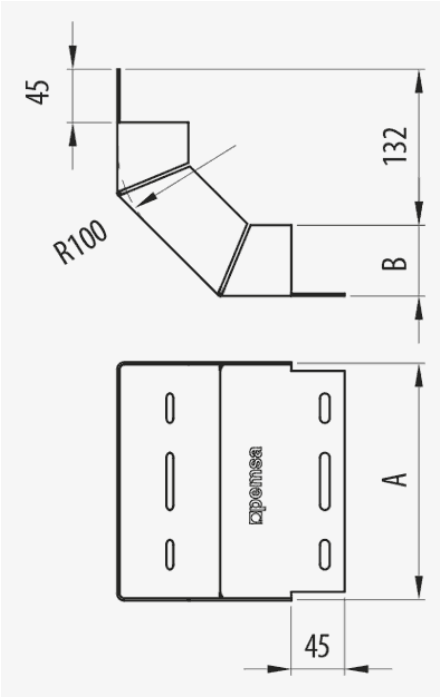

Description

Metal accessory for the creation of a 90° Inside Riser in the wiring installation of the Pemsaband® PQU and PQW tray. It enables a change of height in a vertical direction with great ease and avoids any damage in the routing of the cables. Joins with nuts and bolts. Approved according to CEPSA and REPSOL specifications. Made of steel, with GC Protection System 85 microns thick.

Advantages

Compatible with Pemsaband® PQU and Pemsaband® PQW ranges.

Available for all heights 15, 30, 50, 60 and in widths from 100 to 600.

Conforms to IEC 61537 and CE Conformity to Directive 2014/35/EU.

Specially designed for the petrochemical sector, with CEPSA and REPSOL approvals.

GC protection system (standard UNE-EN ISO 1461), suitable for outdoor installations and in aggressive environments. Corrosion resistance class 8 according to IEC 61537.

Applications

Suitable for the creation of level changes and 90° angle rises in Pemsaband® PQU and PQW trays,for the Support, management and distribution of cables in Petrochemical, Oil & Gas, Offshore, Civil works and Infrastructures, as well as in tunnels and installation galleries.

Solutions

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."

PQ Inside Riser

Main technical characteristics

GC | Class 8 | 15, 30, 50, 60 | 100, 150, 200, 300, 400, 500, 600 | 100 | 1 | Steel with surface coating | 20 J | -50 / 150 °C | A1 No combustible | ETIM 10 EC002400

Product data

		REF	kg/u
15	100	70243010	0,450
15	150	70243015	0,649
15	200	70243020	0,864
15	300	70243030	1,280
30	100	70243110	0,577
30	150	70243115	0,798
30	200	70243120	1,030
30	300	70243130	1,490
30	400	70243140	1,930
30	500	70243150	2,400
30	600	70243160	2,840
50	100	70243210	0,767
50	150	70243215	1,020
50	200	70243220	1,280
50	300	70243230	1,790
50	400	70243240	2,280
50	500	70243250	2,820
50	600	70243260	3,310
60	100	70243310	0,870
60	150	70243315	1,130
60	200	70243320	1,410
60	300	70243330	1,950
60	400	70243340	2,470
60	500	70243350	3,030
60	600	70243360	3,550

Protection System

CU - Copper electroplated

PG - Pregalvanised

EZ - Electrogalvanised

BC - Electrogalvanised Bichromate

BK8 - High Resistance Coating

GC - Hot Dip Galvanising

INOX - Stainless Steel

PT - Polyester Paint

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."

PQ Inside Riser

AL - Aluminum

LN - Brass or Nickel-plated brass

Insulating materials

PC+ABS - Halogen Free Polycarbonate + ABS

PVC - Polyvinyl Chloride

PP - Halogen Free Polypropylene

PA6 - Halogen Free Polyamide 6

PA12 - Halogen Free Polyamide 12

PU - Polyurethane

PE - Polyethylene

NBR - NBR rubber

PET - Thermoplastic Polyester

TPV - Thermoplastic

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."