
1/2

POU AL Accessories 29/03/2024

PQ AL Inside Riser





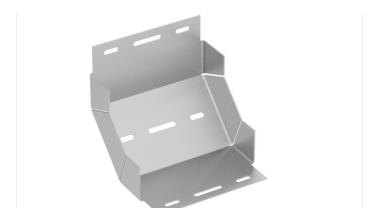

Description

Metal accessory for creating an inside riser in the wiring installation with the Pemsaband® PQU AL tray. It allows descents and height changes to be made with great ease, avoiding damage to the cable routing. Assembly using bolts. Made from Aluminium alloy 1050H24.

Advantages

Available in 30, 50 and 60 mm height and 100, 200, 300, 400, and 600 mm wide.

Its design allows to make rises and changes of height with ease.

CEPSA product approval. Designed according to ESP-2208-5 specification.

CE certified in compliance with the low voltage directive 2014/35 / EU

registered trademarks property of "Pemsa Cable Management, S.A."

Made of Aluminum alloy 1050H24. Excellent corrosion resistance and mechanical properties.

Applications

Solutions













POU AL Accessories 29/03/2024

PQ AL Inside Riser

2/2

Main technical characteristics

S AL

⊜ 30, 60

100, 200, 300, 400, 600

₩ 1

M Aluminum

👤 20 J

***** -50 / 150

ETIM

A1 No combustible

D.,		١		٦		
۲r	ΟC	ıu	CU	a	ata	ı

		Rer	kg/u
30	100	82002348	0.424
30	200	82002349	0.734
30	300	82002350	1.040
30	400	82002351	1.350
30	600	82002352	1.970
60	100	82002353	0.580
60	200	82002354	0.907
60	300	82002355	1.230
60	400	82002356	1.560
60	600	82002357	2.210

S Protection System

CU - Copper electroplated

PG - Pregalvanised

EZ - Electrogalvanised

BC - Electrogalvanised Bichromate

BK8 - High Resistance Coating

GC - Hot Dip Galvanising

INOX - Stainless Steel

PT - Polyester Paint

AI - Aluminum

LN - Brass or Nickel-plated brass

[®] Insulating materials

PC+ABS - Halogen Free Polycarbonate + ABS

PVC - Polyvinyl Chloride

PP - Halogen Free Polypropylene

PA6 - Halogen Free Polyamide 6

PA12 - Halogen Free Polyamide 12

PU - Polyurethane

PE - Polyethylene

NBR - NBR rubber

PET - Thermoplastic Polyester

TPV - Thermoplastic









